DAV-C700/C900

SERVICE MANUAL

Ver 1.0 2001. 08

US Model
Canadian Model
DAV-C700/C900
AEP Model
UK Model
Australian Model
E Model
DAV-C700

- DAV-C700/C900 are composed of following models. As for the service manual, it is issued for each component model, then, please refer to them.

COMPONENT MODEL NAME

	DAV-C700	DAV-C900
COMPACT DISC DECK RECEIVER SYSTEM	HCD-C700	HCD-C900
FRONT SPEAKER SYSTEM	SS-TS500	SS-TS550
CENTER SPEAKER SYSTEM	SS-RS500	SS-CT550
REAR SPEAKER SYSTEM	SS-RS500	SS-RS550
SUBWOOFER SPEAKER SYSTEM	SS-WS500	SS-WS550

- Abbreviation
  E32 : 110-240V AC area in E model
  HK : Hong Kong model
  MX : Mexican model
  SP : Singapore model

PARTS LIST

Part No.	Description	Remarks
1-476-785-11	REMOTE COMMANDER (RM-SS900)	
⚠1-569-008-21	ADAPTOR, CONVERSION 2P (E32, SP)	
1-573-291-11	CONNECTOR, CONVERSION (AEP, UK)	
1-754-060-11	ANTENNA (FM) (MX)	
1-754-147-11	ANTENNA (FM) (EXCEPT MX)	
1-754-149-11	LOOP ANT (AM)	
1-769-108-11	CORD, CONNECTION(VIDEO)	
⚠1-770-019-11	ADAPTOR, CONVERSION PLUG 3P (UK, HK)	
1-823-352-11	CORD (WITH CONNECTOR) (RED, 5m)	
1-823-352-21	CORD (WITH CONNECTOR) (PURPLE, 5m)	
1-823-352-31	CORD (WITH CONNECTOR) (WHT, 5m)	
1-823-352-41	CORD (WITH CONNECTOR) (GRY, 15m)	
1-823-352-51	CORD (WITH CONNECTOR) (BLU, 15m)	
1-823-352-61	CORD (WITH CONNECTOR) (GRN, 5m)	
4-228-654-01	CUSHION (SPK) (FOR SS-RS500/TS500)	
4-235-055-01	COVER, BATTERY (FOR RM-SS900)	
4-235-691-12	MANUAL, INSTRUCTION (ENGLISH) (C700)	
4-236-529-11	MANUAL, INSTRUCTION (ENGLISH) (C700)	
4-236-529-21	MANUAL, INSTRUCTION (FRENCH) (C700)	
4-236-529-31	MANUAL, INSTRUCTION (GERMAN, SPANISH, DUTCH, SWEDISH, ITALIAN, POLISH) (C700)	
4-236-529-41	MANUAL, INSTRUCTION (DANISH, FINNISH, PORTUGUESE) (C700)	
4-236-529-51	MANUAL, INSTRUCTION (CHINESE) (C700)	
4-236-529-61	MANUAL, INSTRUCTION (SPANISH) (C700)	
4-237-230-11	MANUAL, INSTRUCTION (ENGLISH) (C900)	
4-237-230-21	MANUAL, INSTRUCTION (ENGLISH, FRENCH) (C900)	

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

COMPACT AV SYSTEM

9-873-277-01
2001H1600-1
© 2001.8

Sony Corporation
Home Audio Company
Shinagawa Tec Service Manual Production Group

SONY®

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.08	New

SS-CT550

SERVICE MANUAL

Ver 1.1 2001. 10

US Model
Canadian Model
AEP Model
UK Model
E Model
Australian Model

- SS-CT550 is the speaker system in DAV-C900/S800.

SPECIFICATIONS

Speaker system	Bass reflex
Speaker unit	50 mm (2 inches) dia. cone type
Rated impedance	6 ohms
Dimensions (approx.)	260 × 83.5 × 82.7 mm (10 1/4 × 3 3/8 × 3 3/8 inches) (w/h/d)
Mass (approx.)	0.65 kg (2 lb 2 oz)

SPEAKER SYSTEM

9-873-286-02
2001J1600-1
© 2001.10
Sony Corporation
Home Audio Company
Published by Sony Engineering Corporation

SONY®

EXPLODED VIEW AND PARTS LIST

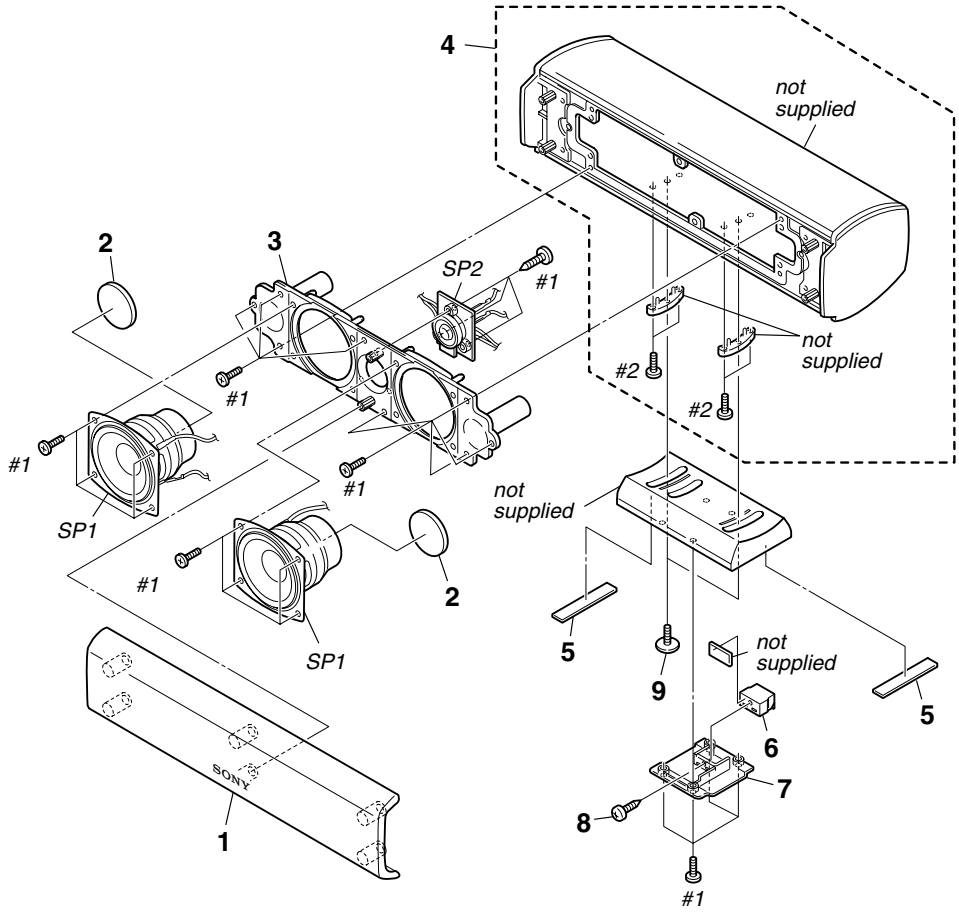

Ref. No.	Part No.	Description	Remarks
1	X-4954-185-1	BRACKET NET (CENTER) SUB ASSY	
2	4-237-441-01	RUBBER (SPK), CUSHION	
3	4-236-935-01	PANEL, BUFFLE (CENTER)	
4	A-4735-531-A	ALMINUM CENTER ASSY	
5	4-236-755-01	FOOT (CENTER)	
6	1-694-836-11	TERMINAL, SPEAKER	
7	4-236-934-01	COVER (JACK)	

Ref. No.	Part No.	Description	Remarks
8	4-237-867-01	SCREW (3.5X10), +BTP TAPPING	
9	4-237-082-01	SCREW (2-6X10), PWH TAPPING	
SP1	1-544-955-11	SPEAKER (56mm)	
SP2	1-544-942-11	LOUD SPEAKER (1.1cm)	
#1	7-685-535-14	SCREW +BTP 2.6X10 TYPE2 N-S	
#2	7-685-105-14	TAPPING +P 2X8 NON-SLIT	

MEMO

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.1	2001.10	Correction of exploded view and add Ref.No.9 on parts list (ENG-01005)
1.0	2001.08	New

SS-WS550

SERVICE MANUAL

Ver 1.0 2001. 08

US Model
Canadian Model
AEP Model
UK Model
E Model
Australian Model

- SS-WS550 is the speaker system in DAV-C900/S800.

SPECIFICATIONS

Speaker system	Bass reflex
Speaker unit	200 mm (7 7/8 inches) dia. cone type
Rated impedance	3 ohms
Dimensions (approx.)	230 × 433 × 400 mm (9 1/8 × 17 1/8 × 15 3/4 inches) (w/h/d)
Mass (approx.)	9.5 kg (21 lb 10 oz)

SPEAKER SYSTEM

9-873-287-01
2001H16001
© 2001.8

Sony Corporation
Home Audio Company
Shinagawa Tec Service Manual Production Group

SONY®

EXPLODED VIEW AND PARTS LIST

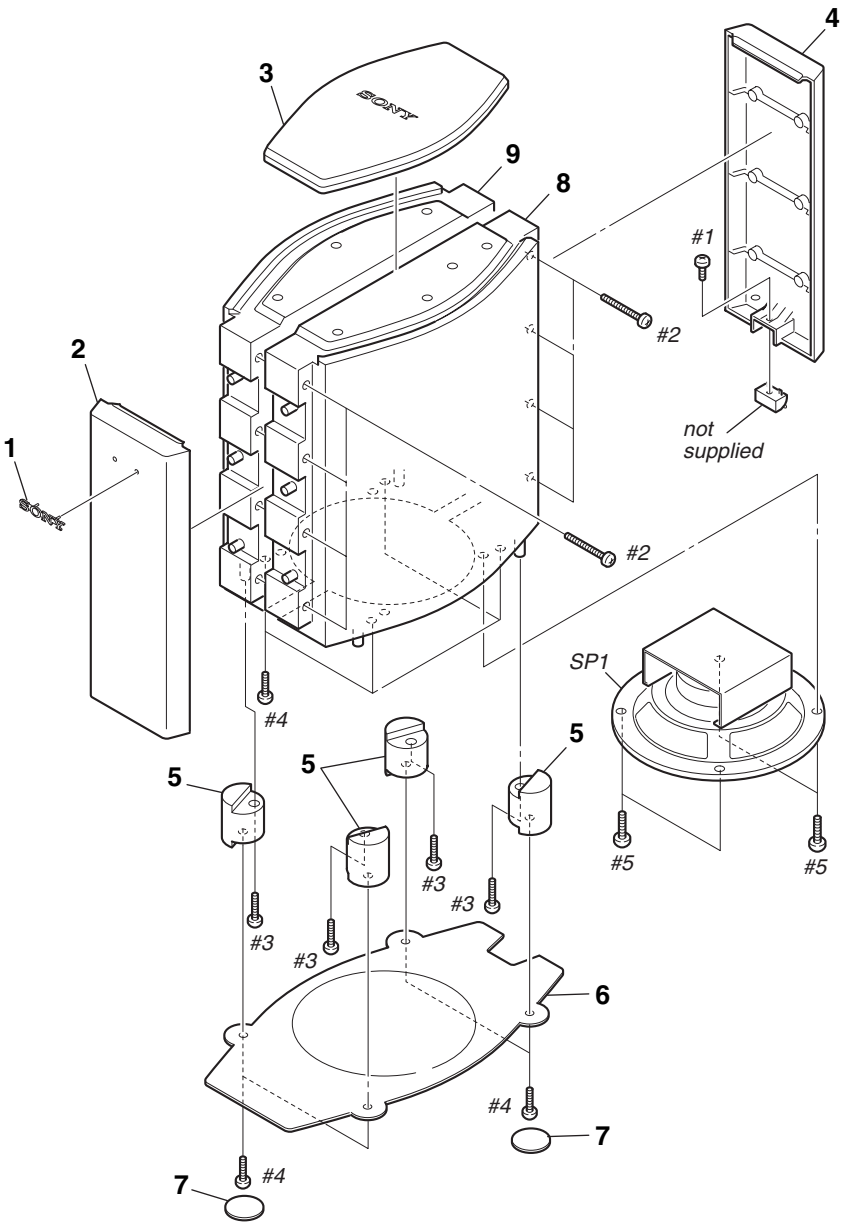

Ref. No.	Part No.	Description	Remarks
1	4-949-384-11	EMBLEM (NO.6), SONY	
2	4-237-097-01	PANEL, FRONT	
3	4-237-104-01	PANEL, TOP	
4	4-237-098-01	PANEL, BACK	
5	4-237-100-01	FOOT	
6	4-237-105-01	COVER (BOTTOM)	
7	4-237-101-01	FOOT (FELT)	
8	4-237-102-01	CABINET (R)	
9	4-237-103-01	CABINET (L)	
SP1	1-544-962-11	SPEAKER (20cm)	
#1			
#2			
#3			
#4			
#5			

MEMO

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.08	New

SS-TS550

SERVICE MANUAL

Ver 1.0 2001. 08

US Model
Canadian Model
AEP Model
UK Model
E Model
Australian Model

- SS-TS550 is the speaker system in DAV-C900/S800.

SPECIFICATIONS

Speaker system	Bass reflex
Speaker unit	50 mm (2 inches) dia. cone type, 15 mm ($^5/_8$ inches) dia. balance dome
Rated impedance	6 ohms
Dimensions (approx.)	82.7 × 1053 × 68 mm (3 $^3/_8$ × 41 $^1/_2$ × 2 $^3/_4$ inches) (w/h/d)
Mass (approx.)	3.28 kg (7 lb 15 oz)

SPEAKER SYSTEM

9-873-288-01
2001H16001
© 2001.8

Sony Corporation
Home Audio Company
Shinagawa Tec Service Manual Production Group

SONY®

EXPLODED VIEW AND PARTS LIST

1. SPEAKER SECTION

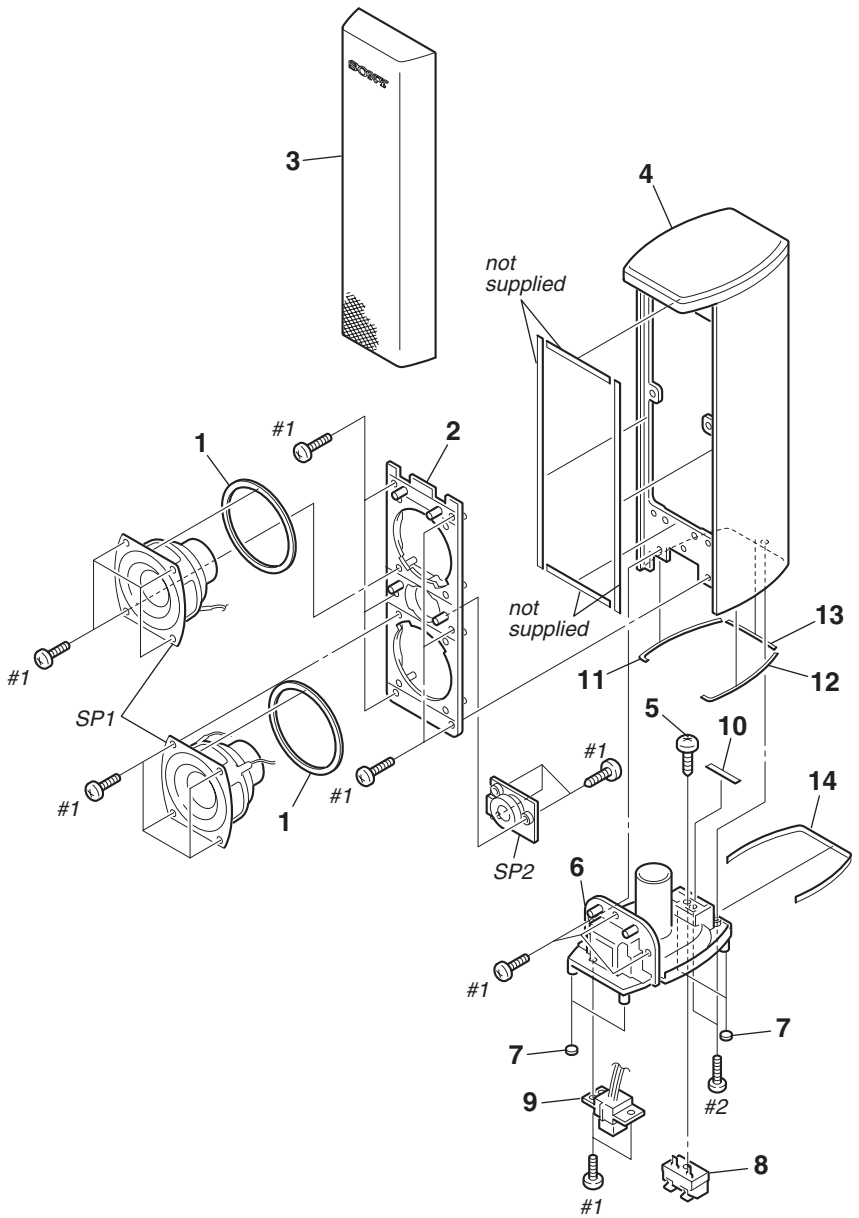

Ref. No.	Part No.	Description	Remarks
1	4-237-441-01	RUBBER (SPK), CUSHION	
2	4-236-936-01	PANEL, BUFFLE (FRONT)	
3	X-4954-186-1	BRACKET NET (FRONT) SUB ASSY	
4	A-4735-535-A	AL, FRONT ASSY	
5	4-237-867-01	SCREW (3.5X10), +BTP TAPPING	
6	4-236-938-01	HOLDER TEMINAL (FRONT)	
7	4-236-758-01	FOOT (FRONT)	
8	1-694-836-11	TERMINAL, SPEAKER	
9	1-823-531-11	CORD (WITH CONNECTOR)	
10	4-237-437-01	CUSHION (HOLDER. TERMINAL)	
11	4-237-811-01	CHSHION 1, AL (FRONT)	
12	4-237-812-01	CHSHION 2, AL (FRONT)	
13	4-237-813-01	CHSHION 3, AL (FRONT)	
14	4-236-948-02	CUSHION, CAP (FRONT)	
SP1	1-544-955-11	SPEAKER (56mm)	
SP2	1-544-942-11	LOUD SPEAKER (1.1cm)	
#1	7-685-535-14	SCREW +BTP 2.6X10 TYPE2 N-S	
#2	7-685-136-14	SCREW +P 2.6X12 TYPE2 NON-SLIT	

2. STAND SECTION

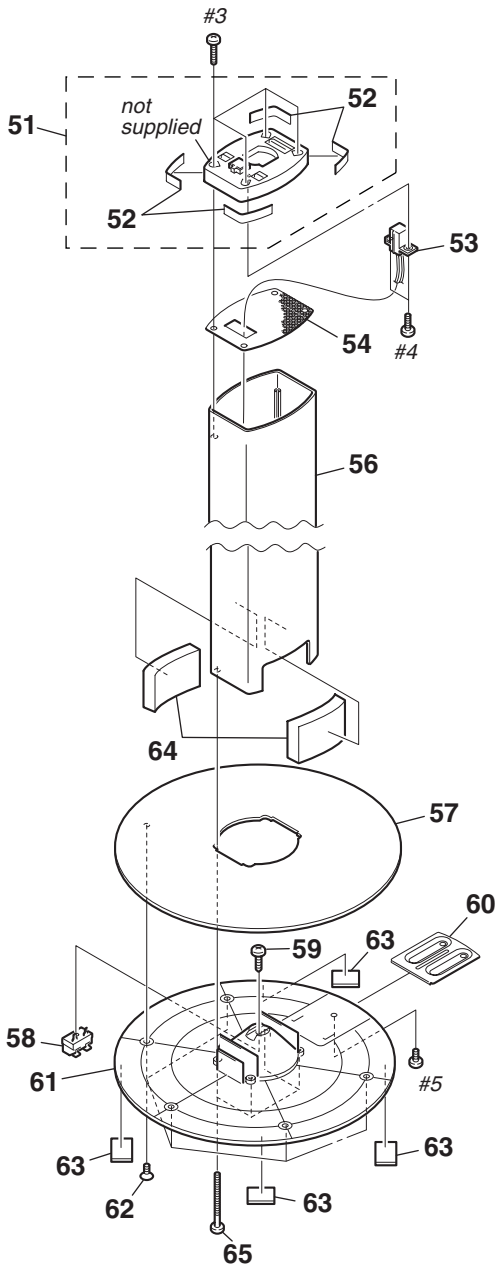

Ref. No.	Part No.	Description	Remarks
51	A-4735-542-A	HOLDER SPK ASSY	
52	3-831-441-99	CUSHION, SPEAKER	
53	1-823-532-11	CORD (WITH CONNECTOR)	
54	4-236-941-01	NET PUNCHING (SS)	
56	4-236-173-01	ALUMINUM (STAND)	
57	4-236-178-01	FOOT (STAND)	
58	1-694-836-11	TERMINAL, SPEAKER	
59	4-237-867-01	SCREW (3.5X10), +BTP TAPPING	
60	4-236-180-01	SLIDER (TERMINAL)	

Ref. No.	Part No.	Description	Remarks
61	4-236-179-01	HOLDER (TERMINAL)	
62	4-237-806-01	SCREW (3X6), +KTT TAPPING	
63	4-236-757-01	FOOT (STAND)	
64	4-237-810-01	CUSHION (STAND. AL)	
65	4-237-807-01	SCREW +BTP 3X40	
#3	7-685-651-79	SCREW +BTP 3X20 TYPE2 N-S	
#4	7-685-546-19	SCREW +BTP 3X8 TYPE2 N-S	
#5	7-685-544-14	SCREW +BTP 3X5 TYPE2 N-S	

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.08	New

SS-RS550

SERVICE MANUAL

Ver 1.0 2001. 08

US Model
Canadian Model
AEP Model
UK Model
E Model
Australian Model

- SS-RS550 is the speaker system in DAV-C900/S800.

SPECIFICATIONS

Speaker system	Bass reflex
Speaker unit	50 mm (2 inches) dia. cone type
Rated impedance	6 ohms
Dimensions (approx.)	82.7 × 1053 × 68 mm (3 3/8 × 41 1/2 × 2 3/4 inches) (w/h/d)
Mass (approx.)	3.28 kg (7 lb 15 oz)

SPEAKER SYSTEM

9-873-289-01
2001H16001
© 2001.8

Sony Corporation
Home Audio Company
Shinagawa Tec Service Manual Production Group

SONY®

EXPLODED VIEW AND PARTS LIST

1. SPEAKER SECTION

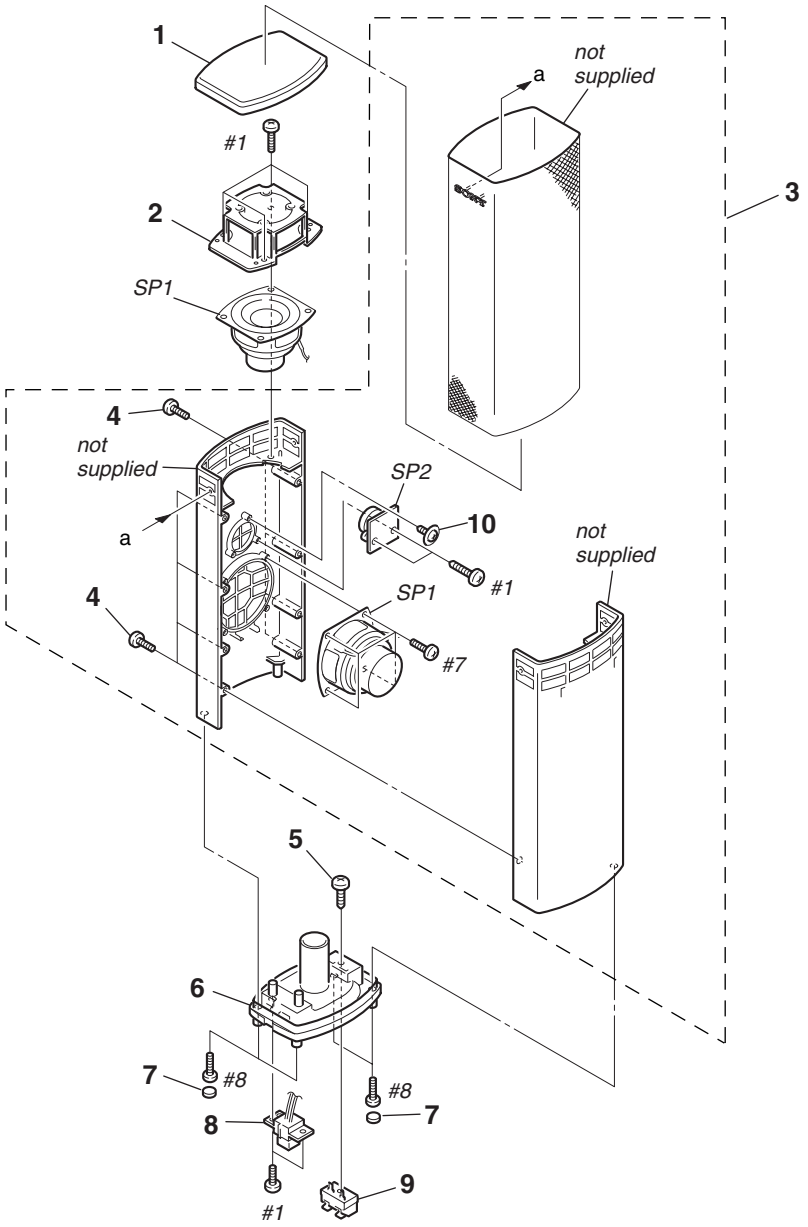

Ref. No.	Part No.	Description	Remarks
1	4-236-937-01	CAP, REAR	
2	4-236-155-01	REFLECTOR (REAR)	
3	X-4954-216-1	BRACKET (REAR.R) SUB ASSY, NET	
3	X-4954-217-1	BRACKET (REAR.L) SUB ASSY, NET	
4	4-229-428-01	SCREW, +BVTP TAPPING	
5	4-237-867-01	SCREW (3.5X10), +BTP TAPPING	
6	4-237-080-01	HOLDER (REAR.L), TERMINAL	
6	4-237-081-01	HOLDER (REAR.R), TERMINAL	
7	4-236-758-01	FOOT (FRONT)	

Ref. No.	Part No.	Description	Remarks
8	1-823-533-11	CORD (WITH CONNECTOR)	
9	1-694-836-11	TERMINAL, SPEAKER	
10	4-237-868-01	SCREW TAPPING +PWH 2.6X6	
SP1	1-544-955-11	SPEAKER (56mm)	
SP2	1-544-942-11	LOUD SPEAKER (1.1cm)	
#1	7-685-535-14	SCREW +BTP 2.6X10 TYPE2 N-S	
#7	7-685-534-14	SCREW +BTP 2.6X8 TYPE2 N-S	
#8	7-685-137-19	SCREW +P 2.6X14 TYPE2 NON-SLIT	

2. STAND SECTION

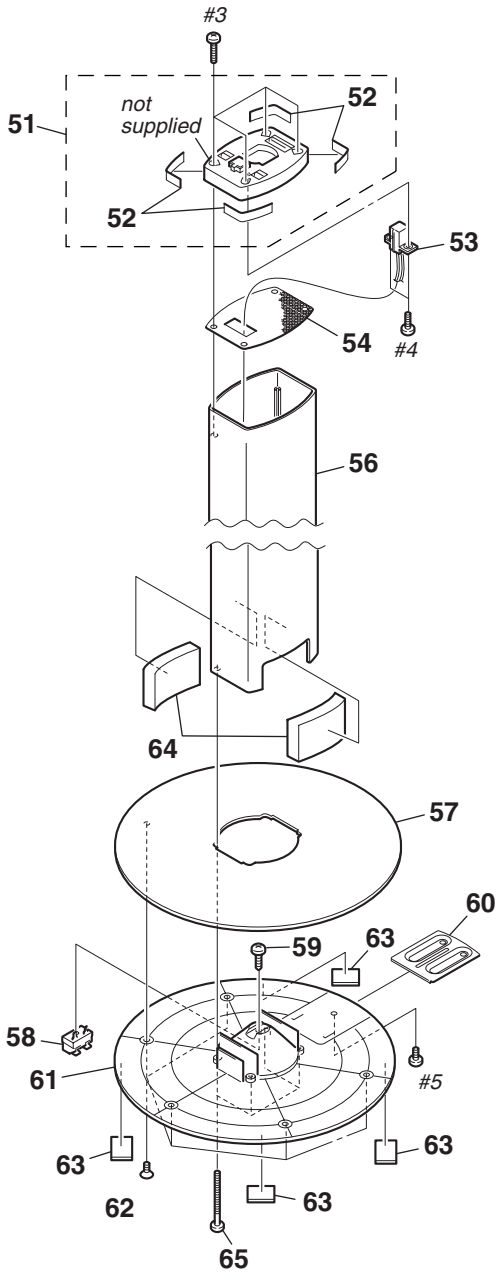

Ref. No.	Part No.	Description	Remarks
51	A-4735-542-A	HOLDER SPK ASSY	
52	3-831-441-99	CUSHION, SPEAKER	
53	1-823-532-11	CORD (WITH CONNECTOR)	
54	4-236-941-01	NET PUNCHING (SS)	
56	4-236-173-01	ALUMINUM (STAND)	
57	4-236-178-01	FOOT (STAND)	
58	1-694-836-11	TERMINAL, SPEAKER	
59	4-237-867-01	SCREW (3.5X10), +BTP TAPPING	
60	4-236-180-01	SLIDER (TERMINAL)	
61	4-236-179-01	HOLDER (TERMINAL)	
62	4-237-806-01	SCREW (3X6), +KTT TAPPING	
63	4-236-757-01	FOOT (STAND)	
64	4-237-810-01	CUSHION (STAND. AL)	
65	4-237-807-01	SCREW +BTP 3X40	
#3	7-685-651-79	SCREW +BTP 3X20 TYPE2 N-S	
#4	7-685-546-19	SCREW +BTP 3X8 TYPE2 N-S	
#5	7-685-544-14	SCREW +BTP 3X5 TYPE2 N-S	

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.08	New

HCD-C700/C900

SERVICE MANUAL

Ver. 1.5 2005.10

Self Diagnosis Supported model

Photo : HCD-C700

US Model
Canadian Model
HCD-C700/C900
AEP Model
UK Model
E Model
Australian Model
HCD-C700

HCD-C700/C900 are the amplifier, DVD/CD and tuner section in DAV-C700/C900.

Model Name Using Similar Mechanism	NEW
Mechanism Type	CDM53K-DVBU7
Base Unit Name	DVBU7
Optical Pick-up Name	KHM-240AAA

SPECIFICATIONS

AUDIO POWER SPECIFICATIONS

POWER OUTPUT AND TOTAL HARMONIC DISTORTION:
With 6 ohm loads, both channels driven, from 120 – 10,000 Hz; rated 50 watts per channel minimum RMS power, with no more than 10 % total harmonic distortion from 250 milliwatts to rated output.

Amplifier section

C700 MODEL

Stereo mode	50 W + 50 W (6 ohms at 1 kHz, THD 10 %)
Surround mode	Front: 50 W + 50 W Center*: 50 W Rear*: 50 W + 50 W (6 ohms at 1 kHz, THD 10 %) Subwoofer*: 100 W (3 ohms at 100 Hz, THD 10 %)

C900 MODEL

Stereo mode	70 W + 70 W (4 ohms at 1 kHz, THD 10 %)
Surround mode	Front: 70 W + 70 W Center*: 70 W Rear*: 50 W + 50 W (6 ohms at 1 kHz, THD 10 %) Subwoofer*: 100 W (3 ohms at 100 Hz, THD 10 %)

* *Depending on the sound field settings and the source, there may be no sound output.*

Inputs (Analog)	VIDEO 1, 2: Sensitivity: 150 mV Impedance: 50 kilohms
Inputs (Digital)	VIDEO 2 (optical): Sensitivity: –
Outputs (Analog)	VIDEO 1 (AUDIO OUT): Voltage: 2 V Impedance: 1 kilohms PHONES: Accepts low- and high-impedance headphones
Outputs (Digital)	DIGITAL OUT (CD) Sensitivity: –

SACD/DVD system

Laser	Semiconductor laser
Signal format system	NTSC or NTSC/PAL
Frequency response (at 2 CH STEREO mode)	DVD (PCM): 2 Hz to 22 kHz (±1.0 dB) CD: 2 Hz to 20 kHz (±1.0 dB)
Signal-to-noise ratio	More than 80 dB (VIDEO 1 (AUDIO) connectors only)
Harmonic distortion	Less than 0.03 %

FM tuner section

System	PLL quartz-locked digital synthesizer system
North American model:	87.5 – 108.0 MHz (100 kHz step)
Other models:	87.5 – 108.0 MHz (50 kHz step)
Antenna	FM wire antenna
Antenna terminals	75 ohms, unbalanced
Intermediate frequency	10.7 MHz

AM tuner section

System	Tuner section: PLL quartz-locked digital synthesizer system
Tuning range	
North American model:	530 – 1,710 kHz (with the interval set at 10 kHz) 531 – 1,710 kHz (with the interval set at 9 kHz)
European, Middle Eastern, and Philipinne models:	531 – 1,602 kHz (with the interval set at 9 kHz)
Other models:	531 – 1,602 kHz (with the interval set at 9 kHz) 530 – 1,710 kHz (with the interval set at 10 kHz)
Antenna	Loop antenna

Video section

Inputs	Video: 1 Vp-p 75 ohms
Outputs	Video: 1 Vp-p 75 ohms S-video: Y: 1 Vp-p 75 ohms C: 0.286 Vp-p 75 ohms

General

Power requirements	
North American model:	120 V AC, 60 Hz
European model:	220 – 240 V AC, 50/60 Hz
Australian and Asian models:	220 – 240 V AC, 50/60 Hz
Mexican model:	120 V AC, 60 Hz
Other models:	110 – 240 V/ 220 – 240 V AC, 50/60 Hz
Power consumption	105 W (120 V AC), 105 W (230 V AC)
Dimensions (approx.)	355 100 394 mm (14 × 4 × 15 5/8 inches) (w/h/d) incl. projecting parts
Mass (approx.)	5.7 kg (12 lb 10 oz)
Operating temperature	5°C to 35°C (41°F to 95°F)
Operating humidity	5 % to 90 %

Design and specifications are subject to change without notice.

COMPACT AV SYSTEM

9-873-327-06
2005J16-1
© 2005.10

Sony Corporation
Home Audio Division
Published by Sony Engineering Corporation

SONY®

Self-diagnosis Function

(When letters/numbers appear in the display)

When the self-diagnosis function is activated to prevent the system from malfunctioning. In this case a five-character service number (e.g., C 13 00) with a combination of a letter and digits appears on the screen and the front panel display. Refer to the following table.



First three characters of the service number	Cause and/or Corrective Action
C 13	The disc is dirty. ➡ Clean the disc with a soft cloth (page 9).
C 31	The disc is not inserted correctly. ➡ Re-insert the disc correctly.
E XX (xx is a number)	To prevent a malfunction, the system has performed the self-diagnosis function. ➡ Contact your nearest Sony dealer or local authorized Sony service facility and give the 5-character service number. Example: E 61 10

NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT

The laser diode in the optical pick-up block may suffer electrostatic break-down because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body.
During repair, pay attention to electrostatic break-down and also use the procedure in the printed matter which is included in the repair parts.
The flexible board is easily damaged and should be handled with care.

NOTES ON LASER DIODE EMISSION CHECK

The laser beam on this model is concentrated so as to be focused on the disc reflective surface by the objective lens in the optical pick-up block. Therefore, when checking the laser diode emission, observe from more than 30 cm away from the objective lens.

LASER DIODE AND FOCUS SEARCH OPERATION CHECK

Carry out the "S curve check" in "CD section adjustment" and check that the S curve waveform is output several times.

Laser component in this product is capable of emitting radiation exceeding the limit for Class 1.

This appliance is classified as a CLASS 1 LASER product. The CLASS 1 LASER PRODUCT MARKING is located on the rear exterior.

CAUTION : INVISIBLE LASER RADIATION WHEN OPEN AND INTERLOCKS DEFEATED. AVOID EXPOSURE TO BEAM.
ADVARSEL : USYNLIG LASERSTRÅLING VED ÅBNING NÅR SIKKERHEDSAFBRYDERE ER UDE AF FUNKTION. UNDGÅ UDSAETTELSE FOR STRÅLING.
VORSICHT : UNSICHTBARE LASERSTRAHLUNG. WENN ABDECKUNG GEÖFFNET UND SICHEREITSVERRIEGELUNG ÜBERBRÜCKT. NICHT DEM STRAHL AUSSETZEN.
VARO! : AVATTAESSA JA SUOJALUKITUS OHITETTAESSA OLET ALTTIINA NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE. ÄLÄ KATSO SÄTEESEEN.
VARNING : OSYNLING LASERSTRÅLING NÄR DENNA DEL ÄR ÖPPNAD OCH SPÄRREN ÄR URKOPPLAD. BETRAKTA EJ STRÅLEN.
ADVERSEL : USYNLIG LASERSTRÅLING NÅR DEKSEL ÅPNES OG SIKKERHEDSLÅS BRYTES. UNNGÅ EKSPONERING FOR STRÅLEN.
VIGYAZAT! : A BURKOLAT NYITÁSAKOR LÁTHATATLAN LÉZERSUGÁRVESZÉLY! KERÜLJE A BESUGÁRZÁST!

This caution label is located inside the unit.

CAUTION
Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Notes on chip component replacement

- Never reuse a disconnected chip component.
- Notice that the minus side of a tantalum capacitor may be damaged by heat.

Flexible Circuit Board Repairing

- Keep the temperature of soldering iron around 270˚C during repairing.
- Do not touch the soldering iron on the same conductor of the circuit board (within 3 times).
- Be careful not to apply force on the conductor when soldering or unsoldering.

CHECKING OF OPERATIONS WITH REMOTE COMMANDERS OF DIFFERENT MODELS

Some of the signal of remote commander vary between generation of player.
Between DAV-S400/S500/S800/C450/C700/C900 and DAV-S550/S880/C770/C900, remote commander signal codes of "FUNCTION", "BAND", "ST/MONO" and "MEMORY" are different.
Take notice of the above when you check the operation with remote commanders of different models.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:
Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE

The AC leakage from any exposed metal part to earth Ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microampers). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

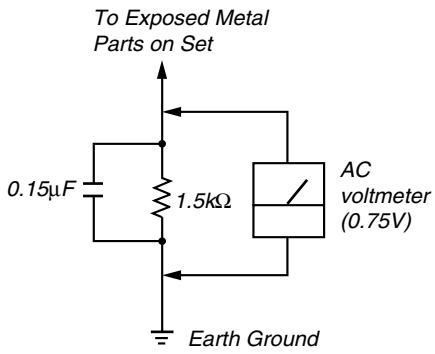

Fig. A. Using an AC voltmeter to check AC leakage.

NOTE OF REPLACING THE DVD BOARD

When replacing the DVD board, since the adjustment value is not set up correctly, "Drive Auto Adjustment" can't be performed.
In this case, initialize Memory in the following procedures.

Procedure:

1. Starting test mode. (See page 18)
2. Press the [2] key of the remote commander, and set the "DRIVE MANUAL OPERATION". (See page 24)
3. Press the [6] key of the remote commander, and set the "6. Memory Check". (See page 26)
4. Press the [CLEAR] key of the remote commander, and initialize Memory.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK ⚠ OR DOTTED LINE WITH MARK ⚠ ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFÉS PAR UNE MARQUE ⚠ SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈSES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPÉMENTS PUBLIÉS PAR SONY.

TABLE OF CONTENTS

1. GENERAL 5

2. DISASSEMBLY 7

3. TEST MODE 18

4. ELECTRICAL ADJUSTMENT 28

5. DIAGRAMS 30

5-1. Block Diagrams
– RF/Servo, Video Section – 32
– CPU Section – 33
– Power Section – 34
5-2. Printed Wiring Board – RF Section – 35
5-3. Schematic Diagram – RF Section – 36
5-4. Printed Wiring Board – DVD Section (Side A) – 37
5-5. Printed Wiring Board – DVD (Side B) Section – 38
5-6. Schematic Diagram – DVD Section (1/9) – 39
5-7. Schematic Diagram – DVD Section (2/9) – 40
5-8. Schematic Diagram – DVD Section (3/9) – 41
5-9. Schematic Diagram – DVD Section (4/9) – 42
5-10. Schematic Diagram – DVD Section (5/9) – 43
5-11. Schematic Diagram – DVD Section (6/9) – 44
5-12. Schematic Diagram – DVD Section (7/9) – 45
5-13. Schematic Diagram – DVD Section (8/9) – 46
5-14. Schematic Diagram – DVD Section (9/9) – 47
5-15. Printed Wiring Board – AMP Section (Side A) – 48
5-16. Printed Wiring Board – AMP Section (Side B) – 49
5-17. Schematic Diagram – AMP Section (1/2) – 50
5-18. Schematic Diagram – AMP Section (2/2) – 51
5-19. Printed Wiring Board – I/O Section – 52
5-20. Schematic Diagram – I/O Section (1/2) – 53
5-21. Schematic Diagram – I/O Section (2/2) – 54
5-22. Printed Wiring Board – Front Section – 55
5-23. Schematic Diagram – Front Section – 56
5-24. Printed Wiring Board – SW Section – 57
5-25. Schematic Diagram – SW Section – 58
5-26. Printed Wiring Board – CDM Section – 59
5-27. Schematic Diagram – CDM Section – 60
5-28. Printed Wiring Board – Power Section (Side A) – 61
5-29. Printed Wiring Board – Power Section (Side B) – 62
5-30. Schematic Diagram – Power Section – 63
5-31. IC Block Diagrams 64
5-32. IC Pin Function Description 67

6. EXPLODED VIEWS

6-1. Case (Top) Section 77
6-2. Chassis Section 78
6-3. Front Panel Section 79
6-4. Overall Section (CDM53K-DVBU7) 80
6-5. Chassis (Mold) Assembly Section (CDM53K-DVBU7) 81
6-6. Chassis Section (CDM53K-DVBU7) 82
6-7. Stocker (240) Overall, Optical Pick-up Section (CDM53K-DVBU7) 83

7. ELECTRICAL PARTS LIST 84

Index to Parts and Controls

For more information, refer to the pages indicated in parentheses.

Front Panel

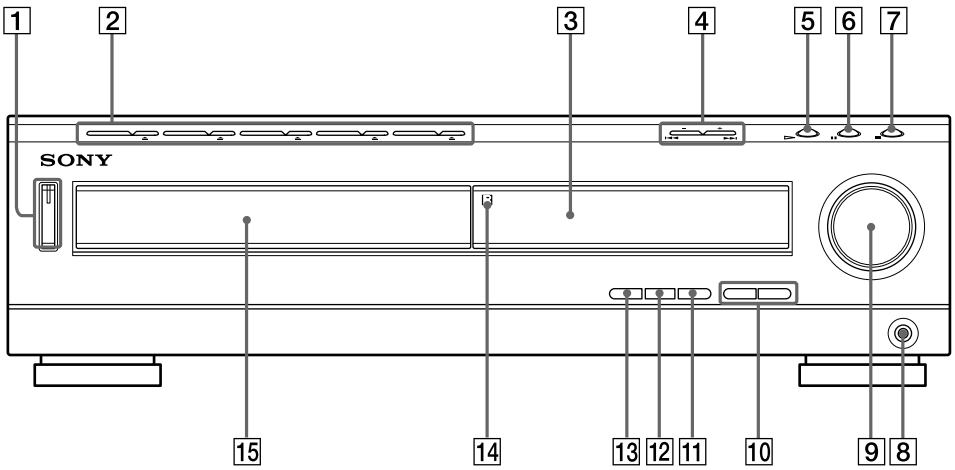

1 POWER switch/indicator (32)
2 DISC 1 (play) /⏏ (open/close)-DISC 5 (play) / ⏏ (open/close) (32)
3 Front panel display (12)
4 ⏮/⏭ PREV/NEXT, PRESET +/– (30, 33)
5 ▷ (play) (32)
6 ⏸ (pause) (33)
7 ■ (stop) (32)
8 PHONES jack (32)
9 VOLUME control (32)
10 SOUND FIELD +/– (49)
11 DISPLAY (49, 62)
12 BAND (30)
13 FUNCTION (61)
14 (remote sensor) (18)
15 Disc tray (32)

Rear Panel

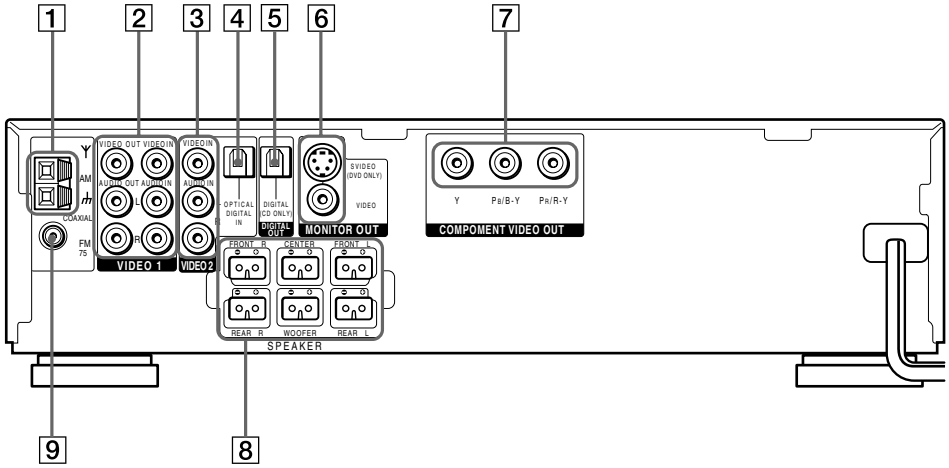

1 AM antenna (21)
2 VIDEO 1 jacks (23)
3 VIDEO 2 jacks (23)
4 DIGITAL IN (OPTICAL) jack (24)
5 DIGITAL OUT (OPTICAL) jack
6 MONITOR OUT (VIDEO/S VIDEO) jacks (23)
7 COMPONENT VIDEO OUT jacks (23)
8 SPEAKER jacks (19)
9 FM 75Ω COAXIAL antenna jack (22)

Remote

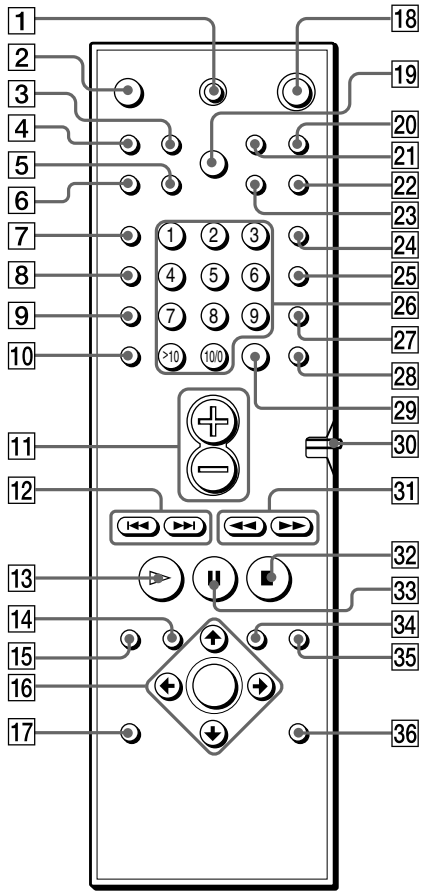

Note

This remote control glows in the dark. However, before glowing, the remote must be exposed to light for awhile.

1 TV I/⏻ (on/standby) (60)
2 OPEN/CLOSE (32)
3 NAME (63)
4 STEREO/MONO (62)
5 MEMORY (30)
6 CLEAR (37)

7 PLAY MODE (37)
8 AUDIO (47)
9 ANGLE (52)
10 SUBTITLE (53)
11 VOL +/– (62)
12 ⏮/⏭ PREV/NEXT, TV/PRESET +/– (30, 33)

13 ▷ PLAY/SELECT (32)
14 TITLE (35)
15 DVD DISPLAY (37)
16 ←/↑/↓/→/ENTER (26)
17 DVD SETUP (56)
18 I/⏻ (on/standby) (32)

19 DISC SKIP (32)
20 TV/VIDEO (60)
21 REPEAT (40)
22 MUTING (33)
23 TIME (45)
24 FUNCTION (61)

25 BAND (30)
26 Number buttons (35)
27 SOUND FIELD (49)
28 DISPLAY (49, 62)
29 ENTER
30 CONTROL DVD/TV switch (60)

31 ◀◀/▶▶/◀I/I▶ SLOW, TUNING +/– (30, 41)
32 ■ STOP (32)
33 II PAUSE (33)
34 DVD MENU (35)
35 ↶ RETURN (36)
36 AMP MENU (26)

SECTION 2
DISASSEMBLY

• The equipment can be removed using the following procedure.

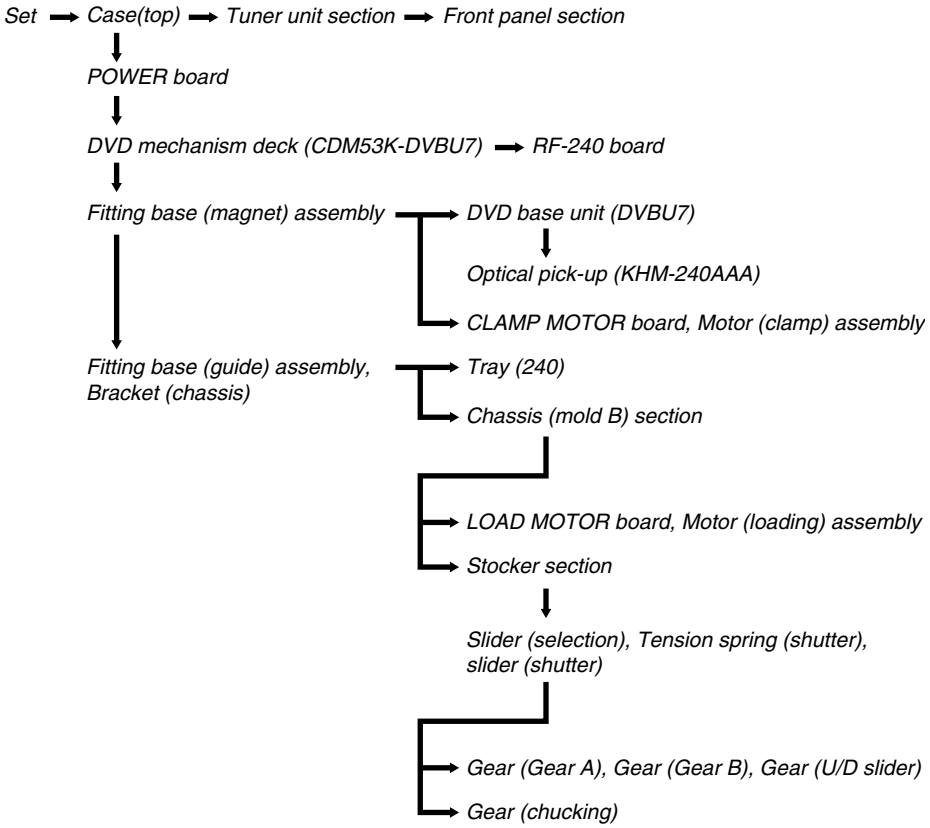

Note: Follow the disassembly procedure in the numerical order given.

2-1. CASE (TOP)

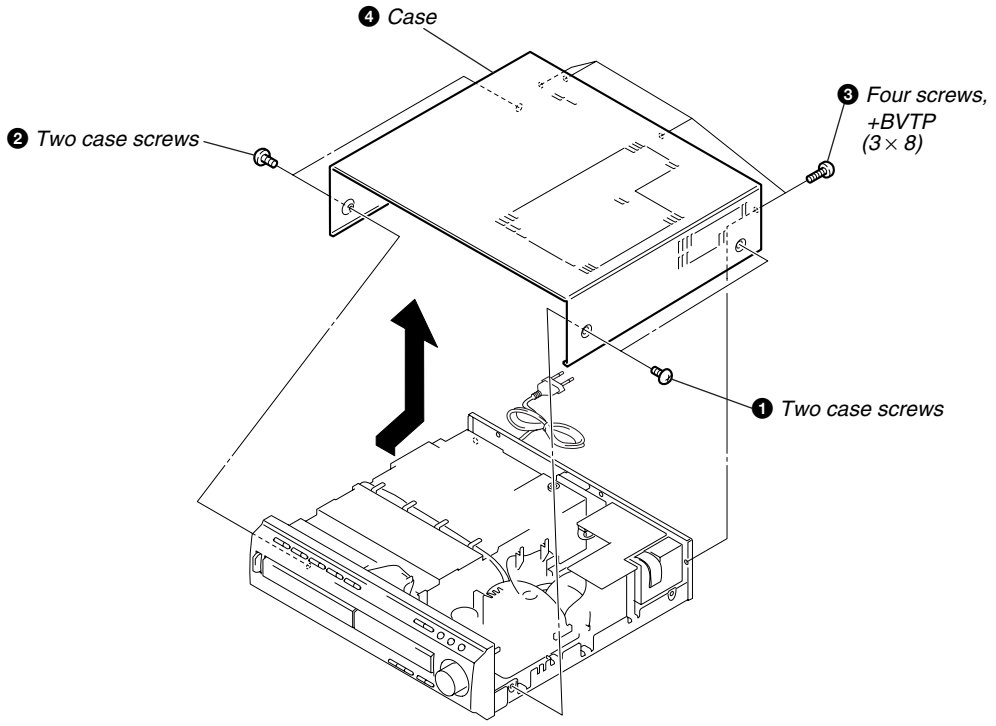

2-2. TUNER UNIT

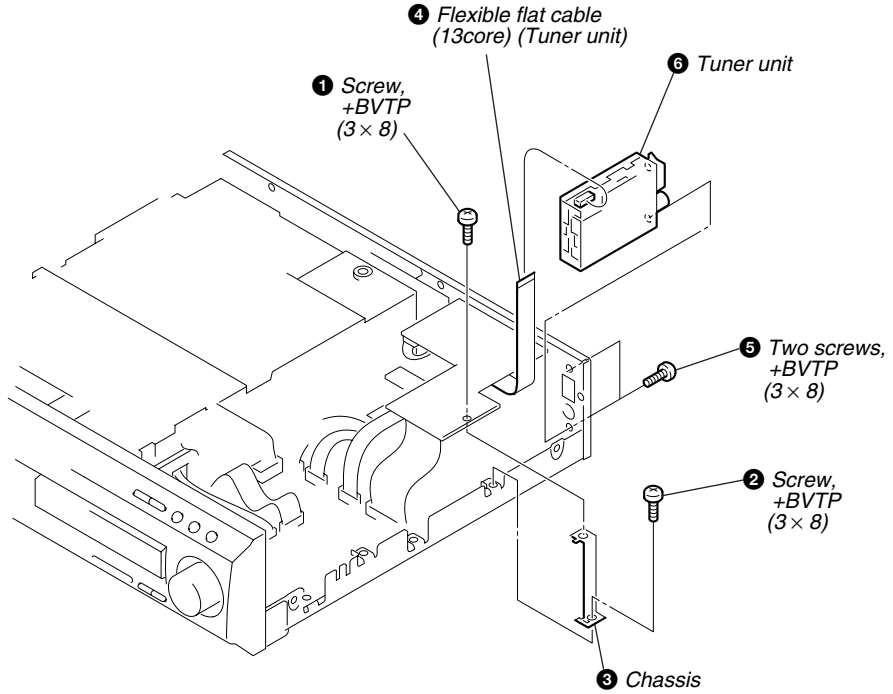

2-3. FRONT PANEL SECTION

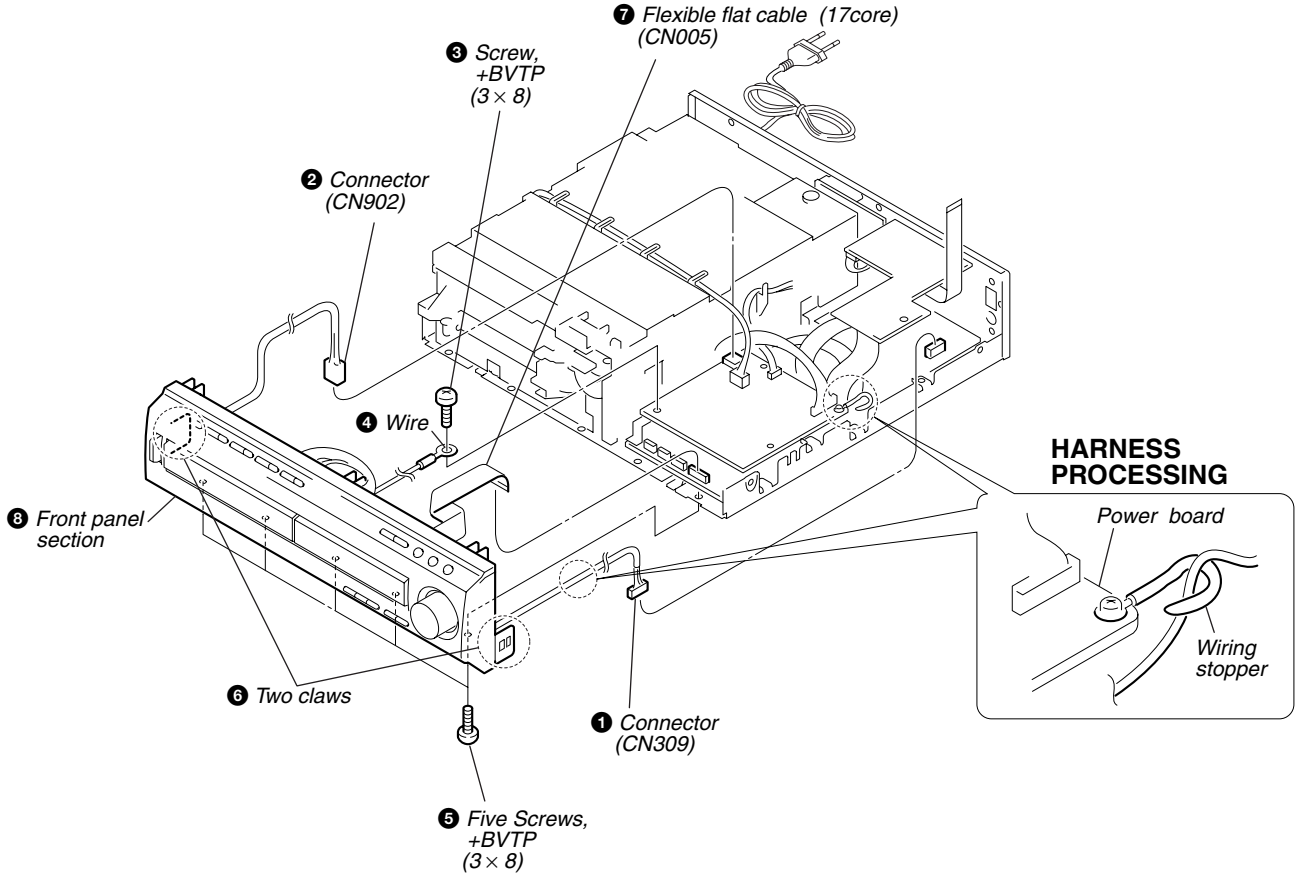

2-4. POWER BOARD

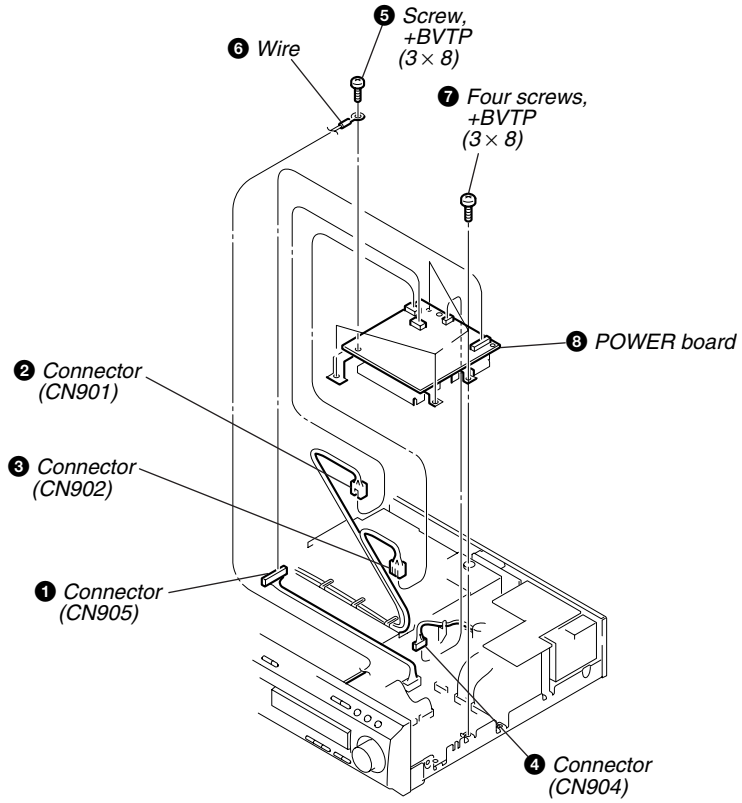

2.5. DVD MECHANISM DECK (CDM53K-DVBU7)

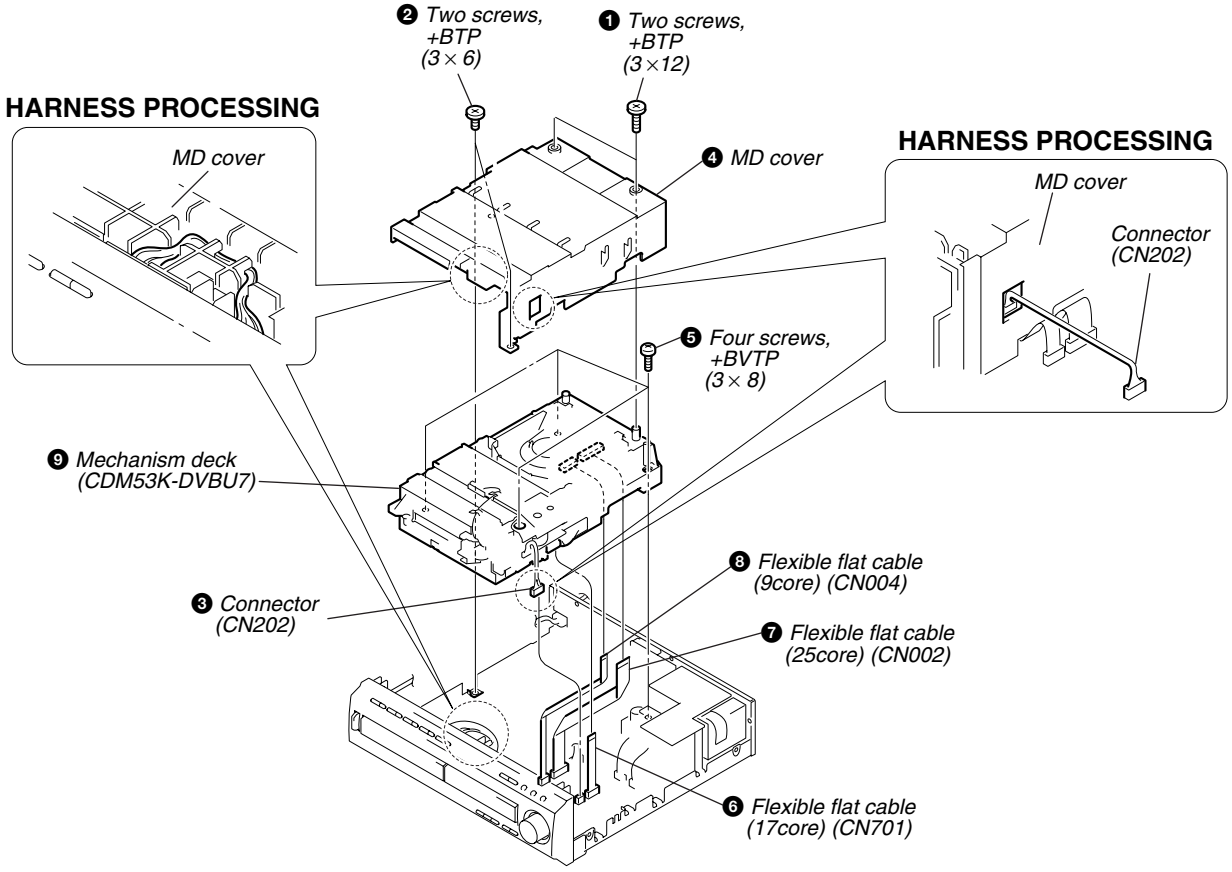

2-6. RF-240 BOARD

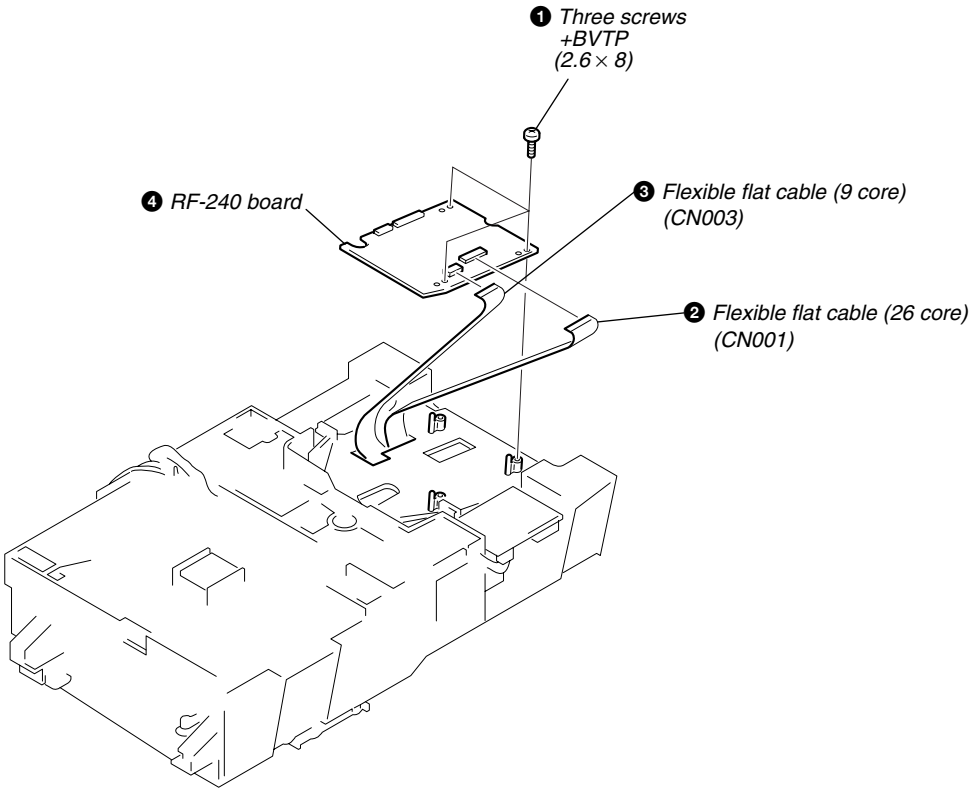

2-7. FITTING BASE (MAGNET) ASSEMBLY

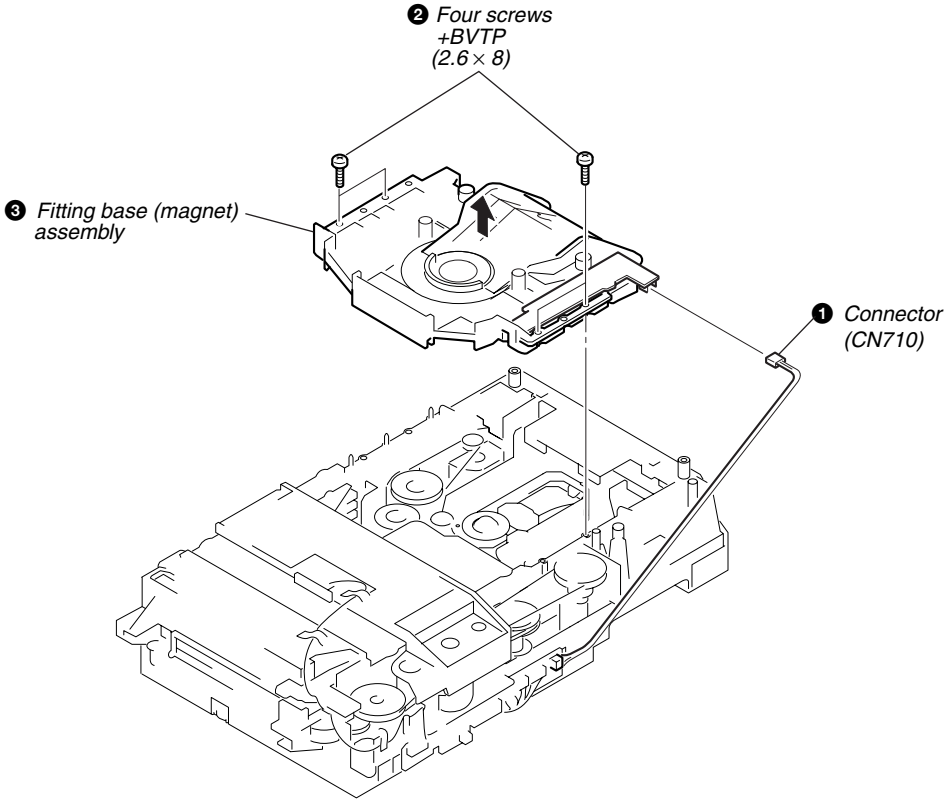

2-8. DVD BASE UNIT (DVBU7)

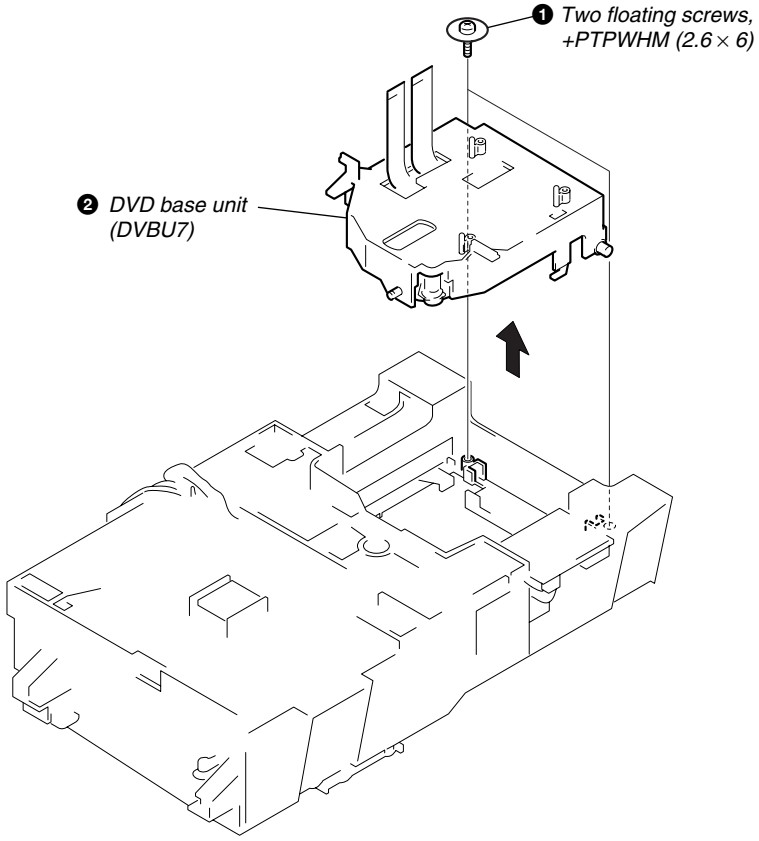

2-9. OPTICAL PICK-UP (KHM-240AAA)

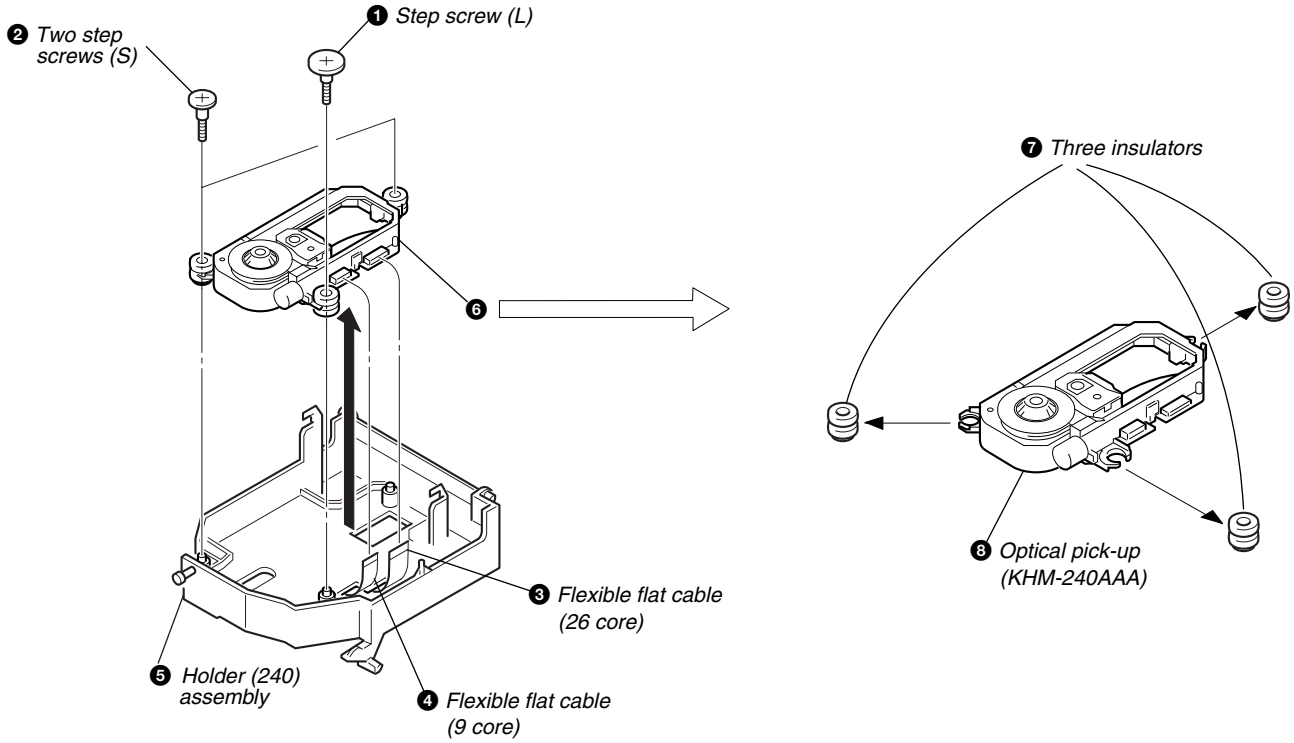
❷ Two step screws (S)
❶ Step screw (L)
❼ Three insulators
❻
❸ Flexible flat cable (26 core)
❺ Holder (240) assembly
❹ Flexible flat cable (9 core)
❽ Optical pick-up (KHM-240AAA)

2-10. CLAMP MOTOR BOARD, MOTOR (CLAMP) ASSEMBLY

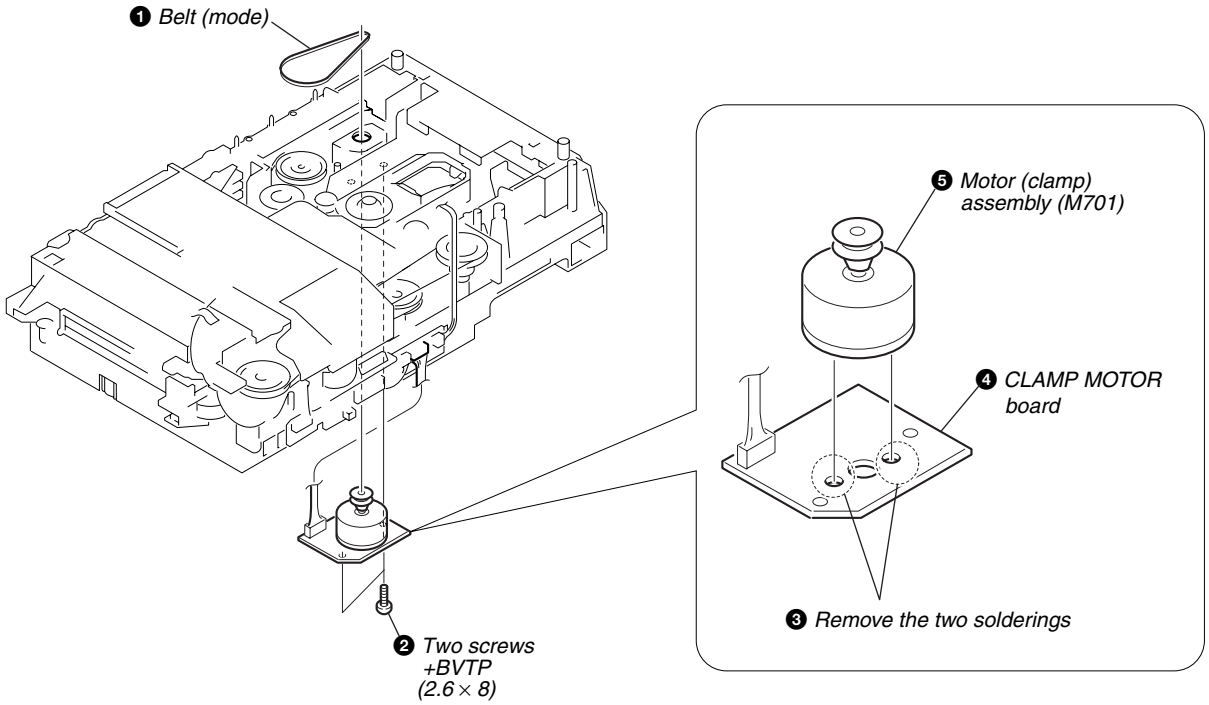

2-11. FITTING BASE (GUIDE) ASSEMBLY, BRACKET (CHASSIS)

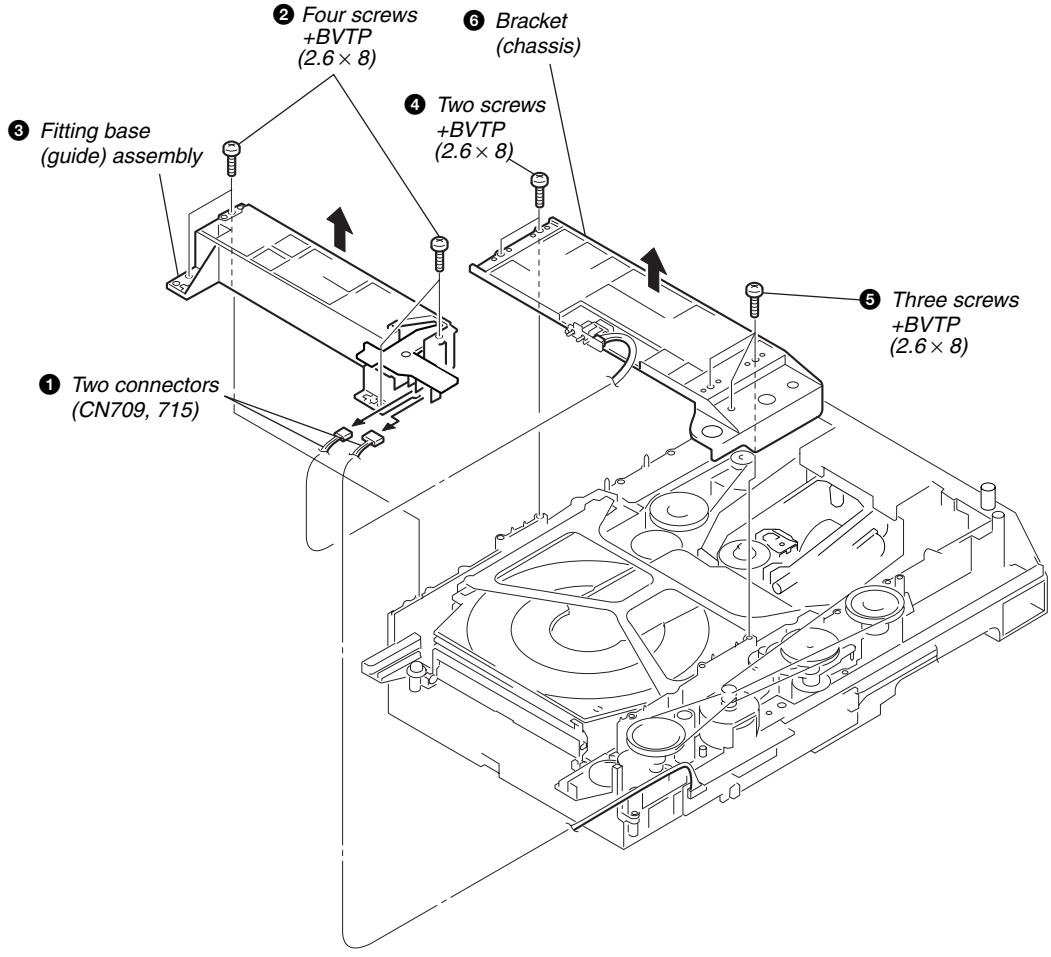
❷ Four screws +BVTP (2.6 × 8)
❻ Bracket (chassis)
❹ Two screws +BVTP (2.6 × 8)
❸ Fitting base (guide) assembly
❺ Three screws +BVTP (2.6 × 8)
❶ Two connectors (CN709, 715)

2-12. TRAY (240)

❶ *Rotating the pulley (LD), shift the slider (selection) in the arrow Ⓐ direction.*
❷ *Rotating the pulley (mode) in the arrow direction, adjust the tray (240) to be removed.*
❸ *Rotating the pulley (LD), shift the slider (selection) in the arrow Ⓑ direction.*
❹ *Rotating the pulley (mode) in the arrow direction, remove the tray (240) to be removed.*

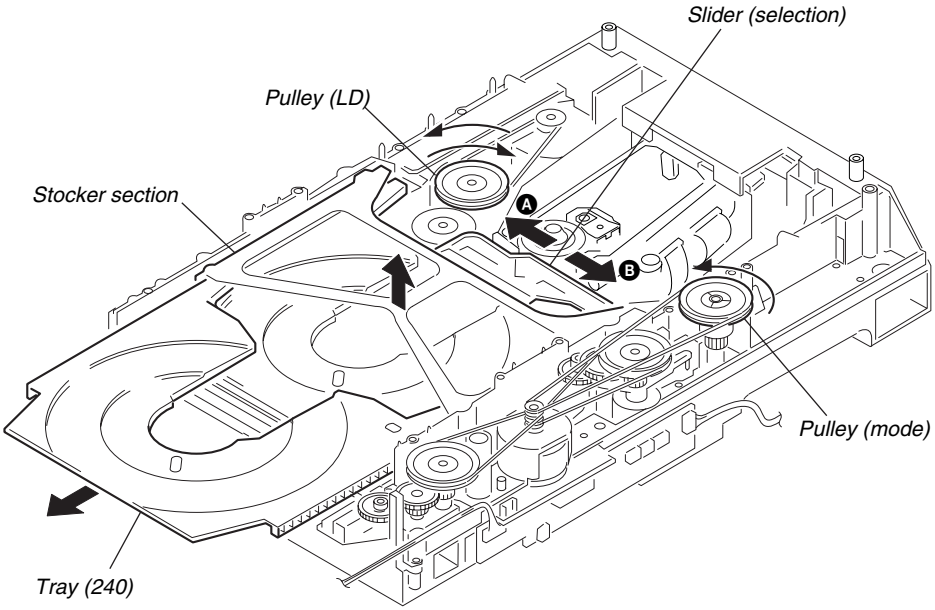

2-13. CHASSIS (MOLD B) SECTION

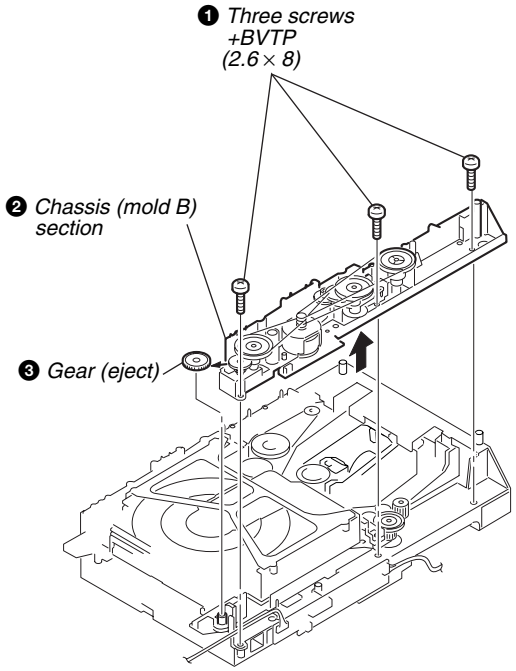

PRECAUTION DURING CHASSIS (MOLD B) SECTION INSTALLATION

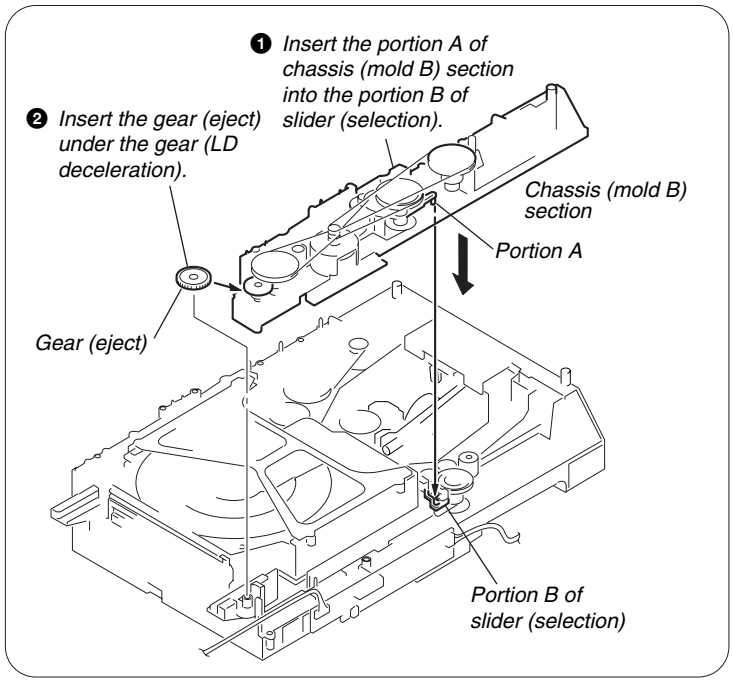
❶ Insert the portion A of chassis (mold B) section into the portion B of slider (selection).
❷ Insert the gear (eject) under the gear (LD deceleration).
Chassis (mold B) section
Portion A
Gear (eject)
Portion B of slider (selection)

2-14. LOAD MOTOR BOARD, MOTOR (LOADING) ASSEMBLY

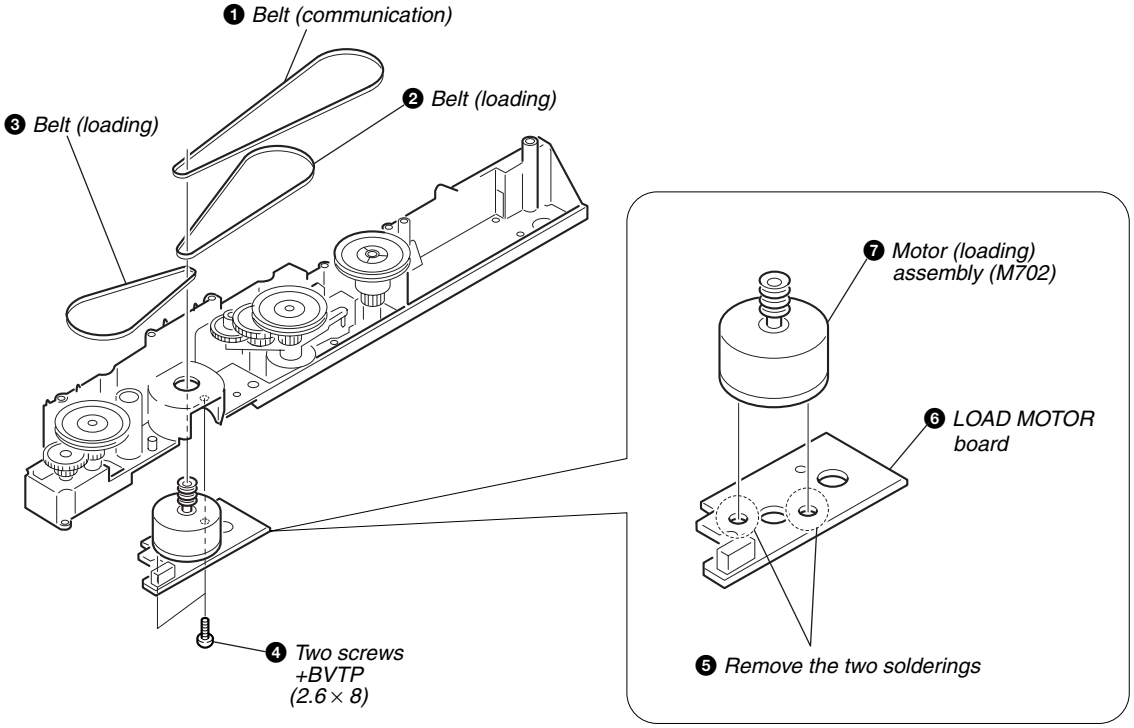
❶ Belt (communication)
❷ Belt (loading)
❸ Belt (loading)
❹ Two screws +BVTP (2.6 × 8)
❺ Remove the two solderings
❻ LOAD MOTOR board
❼ Motor (loading) assembly (M702)

2-15. STOCKER SECTION

PRECAUTION DURING STOCKER SECTION INSTALLATION

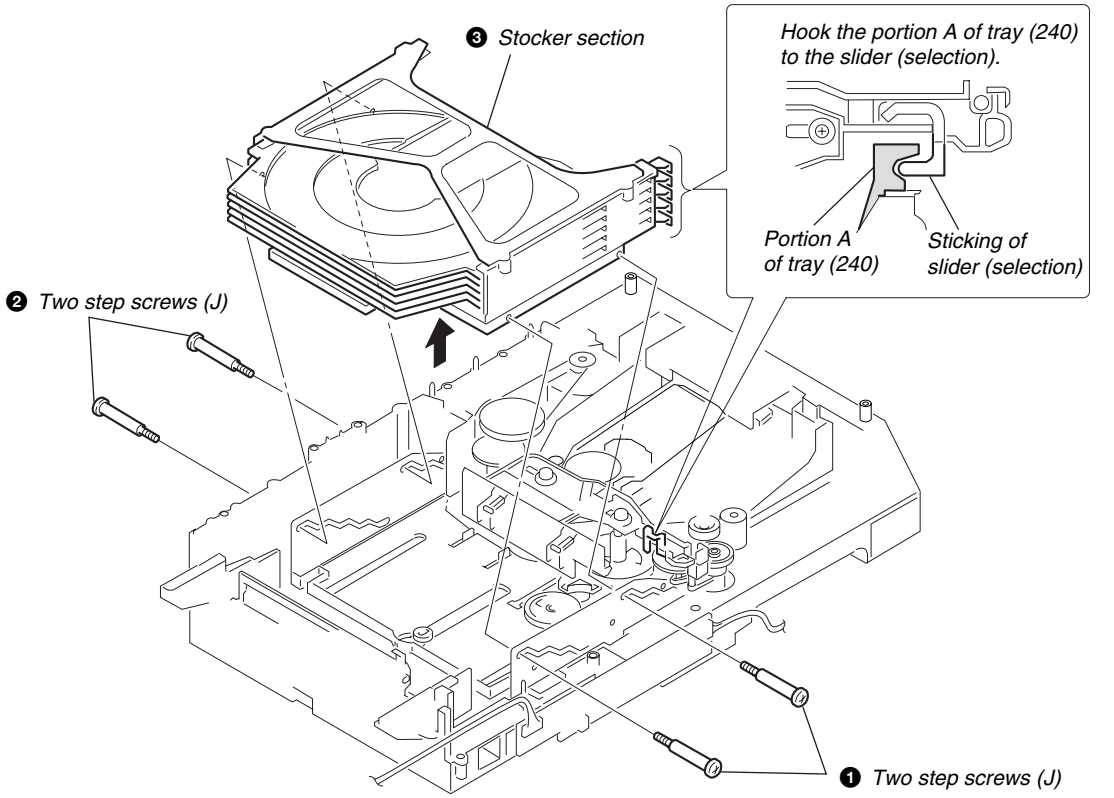
❸ Stocker section
Hook the portion A of tray (240) to the slider (selection).
Portion A of tray (240)
Sticking of slider (selection)
❷ Two step screws (J)
❶ Two step screws (J)

2-16. SLIDER (SELECTION), TENSION SPRING (SHUTTER), SLIDER (SHUTTER)

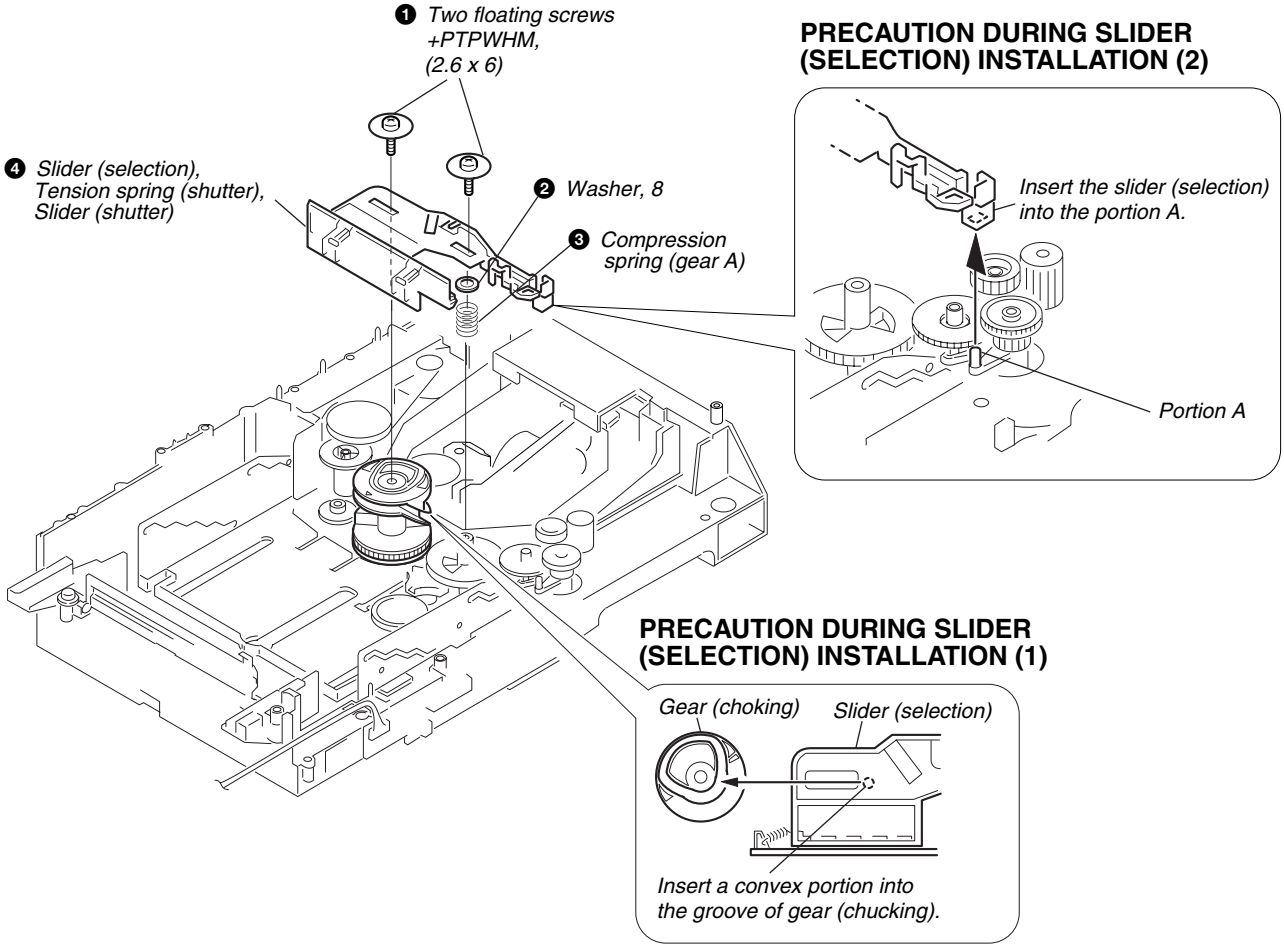
❶ Two floating screws +PTPWHM, (2.6 x 6)
❹ Slider (selection), Tension spring (shutter), Slider (shutter)
❷ Washer, 8
❸ Compression spring (gear A)
PRECAUTION DURING SLIDER (SELECTION) INSTALLATION (2)
Insert the slider (selection) into the portion A.
Portion A
PRECAUTION DURING SLIDER (SELECTION) INSTALLATION (1)
Gear (choking)
Slider (selection)
Insert a convex portion into the groove of gear (chucking).

2-17. GEAR (GEAR A), GEAR (GEAR B), GEAR (U/D SLIDER)

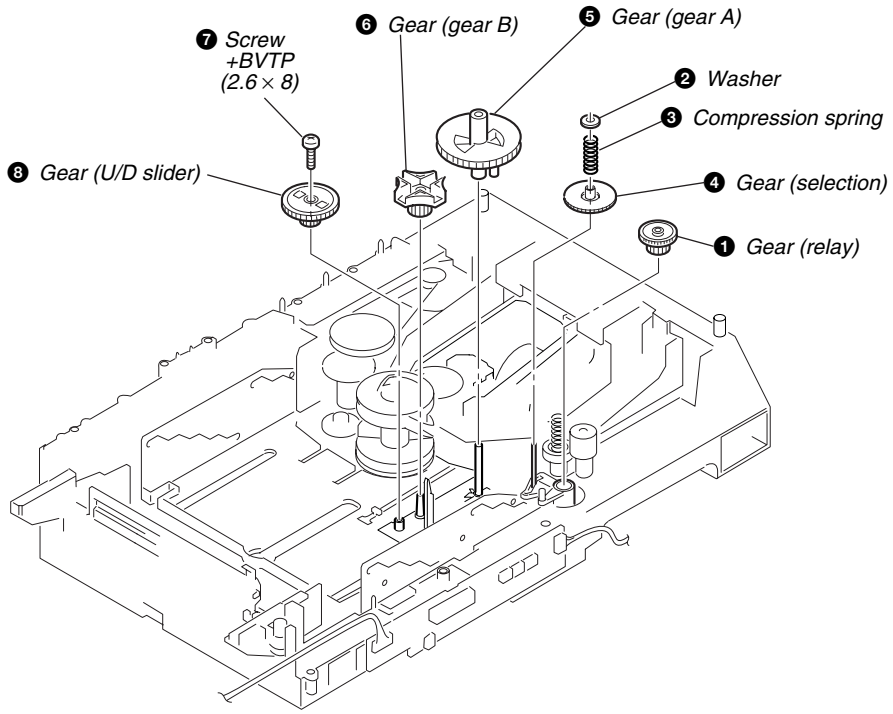

PRECAUTION DURING GEAR (GEAR U/D SLIDER), GEAR (GEAR B), GEAR (GEAR A) INSTALLATION

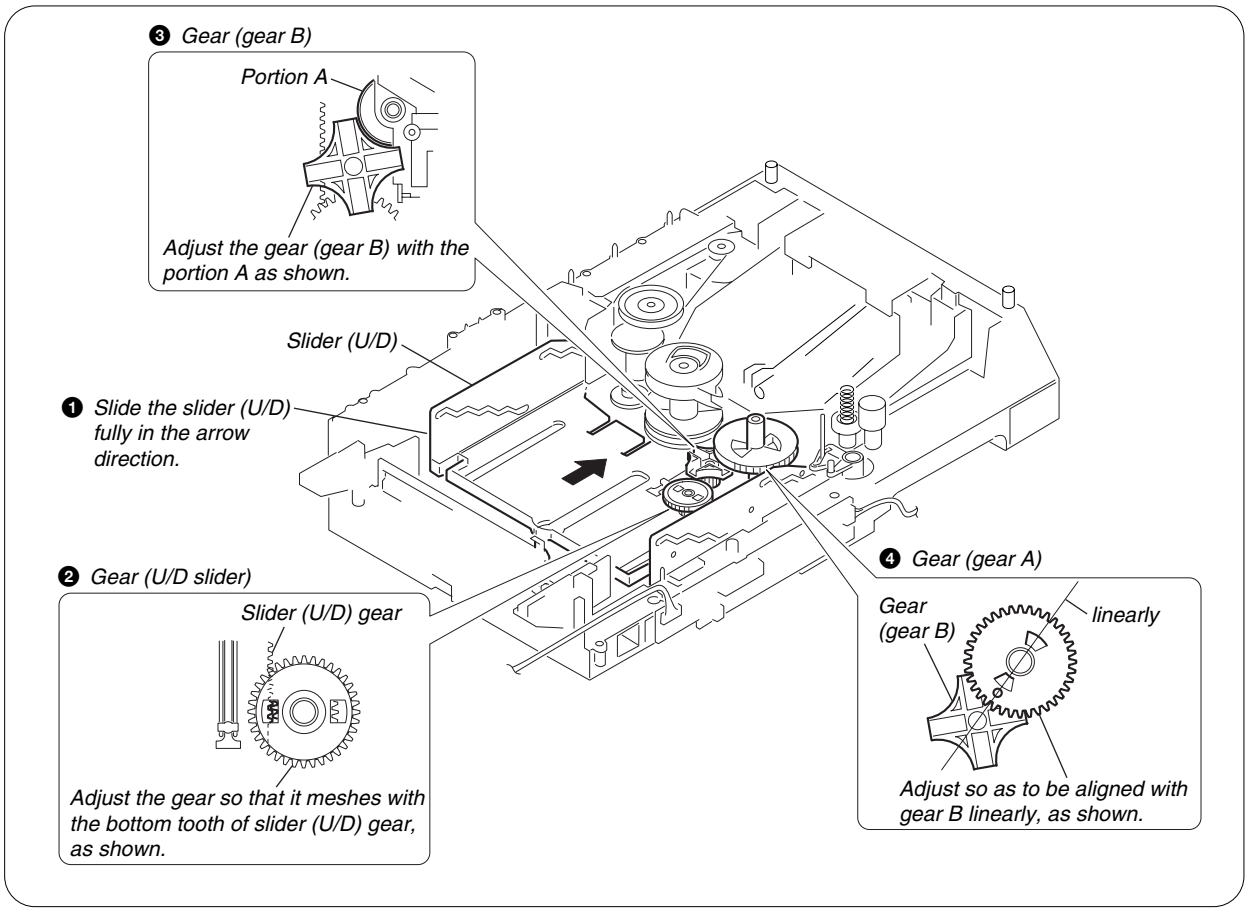
❸ Gear (gear B)
Portion A
Adjust the gear (gear B) with the portion A as shown.
Slider (U/D)
❶ Slide the slider (U/D) fully in the arrow direction.
❷ Gear (U/D slider)
Slider (U/D) gear
Adjust the gear so that it meshes with the bottom tooth of slider (U/D) gear, as shown.
❹ Gear (gear A)
Gear (gear B)
linearly
Adjust so as to be aligned with gear B linearly, as shown.

2-18. GEAR (CHUCKING)

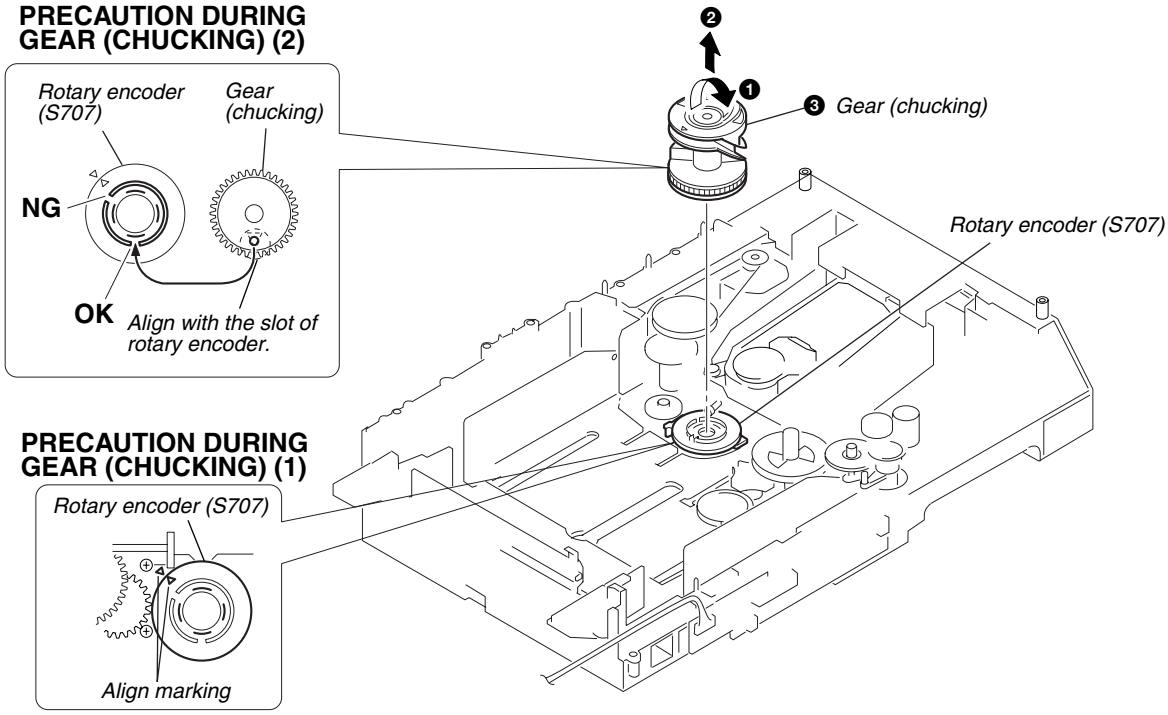

SECTION 3
TEST MODE

3-1. VERSION DISPLAY MODE

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Press three buttons of FUNCTION , ⏮ PREV and ⏏ (Disc 1) simultaneously for two seconds.
3. The message "VER. 1. XX " is displayed for a moment.

3-2. JOG TEST MODE

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Press three buttons of BAND , ■ and ⏏ (Disk 5) simultaneously.
3. The fluorescent indicator displays "JOG 0". The value "JOG 0" increases like +1, +2, +3... if rotating the VOLUME knob clockwisw,or it decreases like –1, –2, –3,.... if rotating counter-clockwise.
4. To exit from this mode, press the POWER button to turn the set off.

3-3. KEY TEST MODE

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Press three buttons of DISPLAY, ■ and ⏏ (Disk 2) simultaneously.
3. The message "KEY NUM 0" is displayed and "0" blinks.
4. Each time a button is pressed, "KEY NUM 0" value increases. However, once a button is pressed, it is no longer taken into account.
5. When all buttons are pressed, "KEY NUM 20" appears and the number blinking is stopped.
6. To exit from this mode, press the POWER button to turn the set off.

3-4. DISPLAY TEST MODE

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Press three buttons of BAND , ❚❚ and ⏏ (Disk 3) simultaneously.
3. All segments and five orange LEDs on the panel are turned on.



4. When the NEXT ▶▶I button is pressed, the display will light up as follows. Five orange LEDs are still lit on.



5. Press the NEXT ▶▶I button, confirm the display. Five orange LEDs are turned off.



6. Press the NEXT ▶▶I button, all segments are turned off.
7. Every pressing of the NEXT ▶▶I button turns on each segments in the same order.
8. To exit from this mode, press the POWER button to turn the set off.

3-5. OSD TEST MODE

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Set the FUNCTION to DVD.
3. While pressing two buttons of DISPLAY and ■ simultaneously, turn the VOLUME knob clockwise.
4. The Test Mode Menu is displayed on the TV screen.
5. To execute each function, select the number on the remote commander.
6. See the following section for explanation in detail.
7. To exit from this mode, press the POWER button to turn the set off.

3-6. DISC TRAY LOCK

Procedure:

1. Press the ⏏ button on the main unit or I/⏻ button on the remote commander to turn the set on.
2. Press two buttons of DISPLAY and ⏮ PREV simultaneously for two seconds.
3. The message "LOCKED" is displayed and the tray is locked. (Even if exiting from this mode, the tray is still locked.)
4. Press two buttons of DISPLAY and ⏮ PREV simultaneously for two seconds again.
5. The message "UNLOCKED" is displayed and the tray is unlocked.
6. To exit from this mode, press the POWER button to turn the set off.

3-7. GENERAL DESCRIPTION

The Test Mode allows you to make diagnosis and adjustment easily using the remote commander and monitor TV. The instructions, diagnostic results, etc. are given on the on-screen display (OSD).

[TEST DISC LIST]

Use the following test disc on test mode.

1) DVD reference disc
   HLX-501 (J-6090-071-A) (dual layer)
   HLX-503 (J-6090-069-A) (single layer)
   HLX-504 (J-6090-088-A) (single layer)
   HLX-505 (J-6090-089-A) (dual layer)
2) SACD reference disc
   HLXA-509 (J-6090-090-A)
   Note: Do not use exiting test disc for DVD.

3-8. STARTING TEST MODE

Set the FUNCTION to DVD with the main unit power on. Next, while pushing the ■ button and the DISPLAY button on the main unit at the same time, turn the VOLUME knob to the right to start Test Mode and display the menu shown below on the TV screen. At the bottom of the menu screen, the model name and revision number are displayed.

To execute each function, select the desired menu and press its number on the remote commander. To exit from Test Mode, press the POWER button.

```
          Test Mode Menu

0. Syscon Diagnosis
1. Drive Auto Adjustment
2. Drive Manual Operation
3. Mecha Aging
4. Emergency History
5. Version Information
6. Video Level Adjustment
                  Exit: POWER Key
_
Model    : HCX-1089_xx
Revision: 1.xxx       Last Off:01
```

3-9. SYSCON DIAGNOSIS

The same contents as board detail check by serial interface can be checked from the remote commander.
On the Test Mode Menu screen, press [0] key on the remote commander, and the following check menu will be displayed.

```
    ### Syscon Diagnosis ###
           Check Menu
0. Quit
1. All
2. Version
3. Peripheral
4. Servo
5. Supply
6. AV Decoder
7. Video
8. Audio
9. DSD Decoder
_
```

0. Quit

Quit the Syscon Diagnosis and return to the Test Mode Menu.

1. All

All items continuous check
This menu checks all diagnostic items continuously. Normally, all items are checked successively one after another automatically unless an error is found, but at a certain item that requires judgment through a visual check to the result, the following screen is displayed for the key entry.

```
    ### Syscon Diagnosis ###

Diag All Check
No. 2 Version

 2-3. ROM Check Sum
Check Sum = 2005



Press NEXT Key to Continue
Press PREV Key to Repeat
_
```

For the ROM Check, the check sum calculated by the Syscon is output, and therefore you must compare it with the specified value for confirmation.
Following the message, press [NEXT] key to go to the next item, or [PREV] key to repeat the same check again. To quit the diagnosis and return to the Check Menu screen, press [■] or [ENTER] key. If an error occurred, the diagnosis is suspended and the error code is displayed as shown below.

```
    ### Syscon Diagnosis ###




 3-3. EEPROM Check
Error 03: EEPROM Write/Reed N
Address    : 00000001
Write Data : 2492
Read Data  : 2490
Press NEXT Key to Continue
Press PREV Key to Repeat
_
```

Press [■] key to quit the diagnosis, or [PREV] key to repeat the same item where an error occurred, or [NEXT] key to continue the check from the item next to faulty item.

Selecting 2 and subsequent items calls the submenu screen of each item.
For example, if "5. Supply" is selected, the following submenu will be displayed.

```
    ### Syscon Diagnosis ###
           Check Menu
         No. 5 Supply
0. Quit
1. All
2. ARP Register Check
3. ARP to RAM Data Bus
4. ARP to RAM Address Bus
5. ARP RAM Check
_
```

0. Quit

Quit the submenu and return to the main menu.

1. All

All submenu items continuous check
This menu checks 2 and subsequent items successively. At the item where visual check is required for judgment or an error occurred, the checking is suspended and the message is output for key entry. Normally, all items are checked successively one after another automatically unless an error is found.

Selecting 2 and subsequent items executes respective menus and outputs the results.
For the contents of each submenu, see "Check Items List".

General Description of Checking Method

2. Version

(2-2) Revision
ROM revision number is displayed.-
Error: Not detected.
The revision number defined in the source file of ROM (At the beginning of mass production, the Flash ROM of IC107 is used, but midway it is replaced by the IC108 OTP ROM. IC107 or IC108) is displayed with four digits.
Below IC107 are all IC107 or IC108.

(2-3) ROM Check Sum
Check sum is calculated.
Error: Not detected.
The 8-bit data are added at addresses 0x000F0000 ~ 0x002EFFFF of ROM (IC107) and the result is displayed with 4-digit hexadecimal number. Error is not detected. Compare the result with the specified value.

(2-4) Model Type
Model code is displayed.
Error: Not detected.
The model code read from EEPROM (IC101) is displayed with 2-digit hexadecimal number.

(2-5) Region
Region code is displayed.
Error: Not detected.
The region code determined from the model code is displayed.

3. Peripheral

(3-2) EEPROM Check
Data write → read, and accord check
Error 03: EEPROM write/read discord
Data 0x9249, 0x2942, 0x4294 are written to addresses 0x00~0xFF of EEPROM (IC101), then read and checked. Before writing, the data are saved, then after checking, they are written to restore the contents of EEPROM.

4. Servo

(4-2) Servo DSP Check
Data write → read, and accord check
Error 12: Read data discord
Data 0x9249, 0x2942, 0x4294 are written to the address 0x602 of RAM in the Servo DSP (IC302), then read and checked.

(4-3) DSP Driver Test
Test signal data → DSP Driver
Error: Not detected.
Caution: Do not conduct this test with a mechanical deck connected.
The maximum voltage is applied to the Servo Driver IC (IC401, IC802). If mechanical deck is connected, the motor and optics could be damaged. Disconnect mechanical deck following the output message, then enter specified 4- or 5-digit number from the remote commander, and press the [ENTER]. The test is conducted only when the input data accord. Check the output level, then press the [NEXT] to finish the test.
This test is skipped if "All" is selected.

Supplement: How to disconnect mechanical deck
Disconnect flat cables connected to the CN009 and CN010 of MB-82/85 board. Also, disconnect harness from the CN201.

5. Supply

Caution: Do not conduct this check with a mechanical deck connected.
An access is made to the stream supply and servo control IC (IC302) and external RAM (IC303) using check data. If mechanical deck is connected, the motor and optics could be damaged. This check is also executed by the "All" menu item.

Supplement: How to disconnect mechanical deck
Disconnect flat cables connected to the CN009 and CN010 of DVD board. Also, disconnect harness from the CN201.

(5-2) ARP Register Check
Data write → read, and accord check
Error 08: ARP register write, and read data discord
Data 0x00 to 0xFF are written to the TMAX register (address 0xC6) in ARP (IC302), then they are read and checked.

(5-3) ARP to RAM Data Bus
Data write → read, and accord check
Error 09: ARP ←→ RAM data bus error
Data 0x0001 to 0x8000 where one bit each is set to 1 are written to the address 0 of RAM (IC303) connected to the ARP (IC302) through the bus, then they are read and checked. In case of discord, written bit pattern and read data are displayed. If data where multiple bits are 1 are read, the bits concerned may touch each other. Further, if data where certain bit is always 1 or 0 regardless of written data, the line could be disconnected or shorted.

(5-4) ARP to RAM Address Bus
Data write → other address read discord check
Error 10: ARP → RAM address bus error
Caution: Address and data display in case of an error is different from the display of other diagnosis (described later).
Before starting the test, all addresses of RAM (IC303) are cleared to 0x0000.
First, 0xA55A is written to the address 0x00000, and the address data are read and checked from addresses 0x00001 to 0x80000 while shifting 1 bit each. Next, the data at that address is cleared, and it is written to the address 0x00001, and read and checked in the same manner. This check is repeated up to the address 0x80000 while shifting the address data by 1 bit each.
If data other than 0 is read at the addresses except written address, an error is given because all addresses were already cleared to 0. In this check, the error display pattern is different from that of other diagnosis; read data, written address, and read address are displayed in this order. However, the message uses same template, and accordingly exchange Address and Data when reading. The following display, for example,

```
    ### Syscon Diagnosis ###



 5-4. ARP to RAM Address Bus
Error 10: ARP - RAM Address B
Address    : 0000A55A
Write Data : 00000000
Read Data  : 00080000
Press NEXT Key to Continue
Press PREV Key to Repeat
_
```

shows the data 0xA55A was read from address 0x00080000 though it was written to the address 0x00000000. This implies that these addresses are in the form of shadow. Also, if the read data is not 0xA55A, another error will be present.

(5-5) ARP RAM Check
Data write → read, and accord check
Error 11: ARP RAM read data discord
The program code data stored in ROM are copied to all areas of RAM (IC303) connected to the ARP (IC302) through the bus, then they are read and checked if they accord. If the detail check was selected initially, the data are written to all areas and read, then the same test is conducted once again with the data where all bits are inverted between 1 and 0. If discord is detected, faulty address, written data, and read data are displayed following the error code 11, and the test is suspended.

6. AV Decoder

(6-2) 1930 RAM
Data write → read, and accord check
Error 13: AVD RAM read data discord
The program code data stored in ROM (IC107 or IC108) are copied to all areas oo»RAM (IC504, IC505) connected to the AVD (IC503) through the bus, then they are read and checked if they accord. Further, the same test is conducted once again with the data where all bits are inverted between 1 and 0. If discord is detected, faulty address, written data, and read data are displayed following the error code 13, and the test is suspended.

(6-3) 1930 SP
ROM → AVD RAM → Video OUT
Error: Not detected.
The data including sub picture streams in ROM (IC107 or IC108) are transferred to the RAM (IC504, IC505) in AVD (IC503), and output as video signals from the AVD (IC503). They are output from all video terminals (Composite, Y/C).

7. Video

(7-2) Color Bar
AVD color bar command write → Video OUT
Error: Not detected.
The command is transferred to the AVD, and the color bar signals are output from video terminals.
They are output from all video terminals (Composite, Y/C).

(7-3) Composit Out

(7-4) Y/C Out

(7-6) Component Out

8. Audio

(8-2) ARP → 1930
Error 14 : ARP → 1930 video NG
15 : ARP → 1930 audio NG

(8-3) Test Tone
All channels
2ch Left
2ch Right
Front Left
Front Right
Rear Left
Rear Right
Center
Sub Woofer

9. DSD Decoder

(9-2) 2752 ID Chack

(9-3) 2752 RAM Check

Check Items List

2) Version
(2-2) Revision
(2-3) ROM Check Sum
(2-4) Model Type
(2-5) Region

3) Peripheral
(3-2) EEPROM Check

4) Servo
(4-2) Servo DSP Check
(4-3) DSP Driver Test

5) Supply
(5-2) ARP Register Check
(5-3) ARP to RAM Data Bus
(5-4) ARP to RAM Address Bus
(5-5) ARP RAM Check

6) AV Decoder
(6-2) 1930 RAM
(6-3) 1930 SP

7) Video
(7-2) Color Bar
(7-3) Composit Out
(7-4) Y/C Out
(7-6) Component Out

8) Audio
(8-2) ARP → 1930
(8-3) Test Tone

9) DSD Decoder
(9-2) 2752 ID Check
(9-3) 2752 RAM Check

Error Codes List

00: Error not detected
01: RAM write/read data discord
02: Gate array NG
03: EEPROM NG
08: ARP register read data discord
09: ARP ←→ RAM data bus error
10: ARP ←→ RAM address bus error
11: ARP RAM read data discord
12: Servo DSP NG
13: 1930 SDRAM NG
14: ARP → 1930 video NG
15: ARP → 1930 audio NG
16: 1910 UCODE download NG
17: System call error (function not supported)
18: System call error (parameter error)
19: System call error (illegal ID number)
20: System call error (time out)
90: Error occurred
91: User verification NG
92: Diagnosis cancelled

3-10. DRIVE AUTO ADJUSTMENT

On the Test Mode Menu screen, press [1] key on the remote commander, and the drive auto adjustment menu will be displayed.

```
   ## Drive Auto Adjustment ##

         Adjustment Menu

0. ALL
1. DVD-SL
2. CD
3. DVD-DL
4. LCD



                    Exit: RETURN
```

Normally, [0] is selected to adjust DVD (single layer), CD, DVD (dual layer), and SACD in this order. But, individual items can be adjusted for the case where adjustment is suspended due to an error. In this mode, the adjustment can be made easily through the operation following the message displayed on the screen.
The disc used for adjustment must be the one specified for adjustment. However, for SACD disc, use the player with initial data if the disc is not available.

Note: After parts related to the servo circuit (RF amplifier, DSP, motor driver, EEPROM (IC302) so on) are replaced, re-adjusting the servo circuit is necessary. Select "ALL" at "DRIVE AUTO ADJUSTMENT" and adjust DVD-SL (single layer), CD and DVD-DL (dual layer).

0. ALL

Select [0] and press [ENTER] key, and the servo set data in EEPROM will be initialized. Then, 1. DVD-SL disc, 2. CD disc, 3. DVD-DL disc, and 4. SACD disc are adjusted in this order. Each time one disc was adjusted, it is ejected. Replace it with the specified disc following the message. Though the message to confirm whether discs other than SACD disc are adjusted is not displayed, you can finish the adjustment if pressing the [■] button. During adjustment of each disc, the measurement for disc type judgment is made. As automatic adjustment does not judge the disc type unlike conventional models, take care not to insert wrong type discs. Also, do not give a shock during adjustment.

1. DVD-SL (single layer)

Select [1], insert DVD single layer disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

DVD Single Layer Disc Adjustment Steps
1. SLED TILT Reset
2. Disc Check Memory SL
3. Wait 300 msec
4. Set Disc Type SL
5. LD ON
6. Spdl Start
7. Wait 1 sec
8. Focus Servo ON 0
9. Auto Track Offset Adjust
10. CLVA ON
11. Wait 500 msec
12. Tracking ON
13. Wait 1 sec
14. Sled ON
15. Check CLV Lock
16. Auto LFO Adjust
17. Auto Focus Offset Adjust
18. Auto Tilt Position Adjust
19. Auto Focus Gain Adjust
20. Auto Focus Offset Adjust
21. EQ Boost Adjust
22. Auto LFO Adjust
23. Auto Track Gain Adjust, Search Check
24. 32Tj Fwd
25. 32Tj Rev
26. 500Tj Fwd
27. 500Tj Rev

28. All Servo Stop
29. Eep Copy Loop Filter Offset

2. CD

Select [2], insert CD disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

CD Adjustment Steps
1. Sled Tilt Rest
2. Disc Check Memory CD
3. Wait 500 msec
4. Set Disc Type CD
5. LD ON
6. Spdl Start
7. Wait 500 msec
8. Focus Servo ON 0
9. Auto Track Offset Adjust

10. CLVA ON
11. Wait 500 msec
12. Tracking ON
13. (TC Display Start)
14. Wait 1 sec
15. Jitter Display Start
16. Sled ON
17. Check CLV ON
18. Auto LFO Adjust
19. Auto Focus Offset Adjust
20.
21. Auto Focus Gain Adjust
22. Auto Focus Offset Adjust
23. Eq Boost Adjust
24. Auto LFO Adjust
25. Auto Track Gain Adjust, Search Check
26. 32Tj Fwd
27. 32Tj Rev
28. 500Tj Fwd
29. 500Tj Rev

30. All Servo Stop

3. DVD-DL (dual layer)

Select [3], insert DVD dual layer disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM.

DVD Dual Layer Disc Adjustment Steps
1. Sled Tilt Reset
2. Disc Check Memory DL
3. Wait 500 msec
4. Set Disc Type DL
5. LD ON
6. Spdl Start
7. Wait 1 sec, Layer 1 Adjust
8. Focus Servo ON 0
9. Auto Track Offset Adjust

10. Clva ON
11. Wait 500 msec
12. Tracking ON
13. Wait 500 msec
14. Sled ON
15. Check CLV Lock
16. Auto Loop Filter Offset Auto Focus Adjust
17.
18. Auto Focus Gain Adjust
19. Auto Focus Offset Adjust
20. Eq Boost Adjust
21. Auto Loop Filter Offset
22. Auto Track Gain Adjust, Search Check
23. 32Tj Fwd
24. 32Tj Rev
25. 500Tj Fwd
26. 500Tj Rev, Layer 0 Adjust
27. Fj (L1 -> L0)
28. Auto Track Offset Adjust L0

29. Clva ON
30. Wait 500 msec
31. Tracking ON
32. Wait 500 msec
33. Sled ON
34. Check CLV Lock
35. Auto Focus Filter Offset
36. Auto Focus Adjust
37.
38. Auto Focus Gain Adjust
39. Auto Focus Offset Adjust
40. Eq Boost Adjust
41. Auto Loop Filter Offset
42. Auto Track Gain Adjust, Search Check
43. 32Tj Fwd
44. 32Tj Rev
45. 500Tj fwd
46. 500Tj Rev, Layer Jump Check
47. Lj (L0 -> L1)
48. Lj (L1 -> L0)

49. All Servo Stop

4. LCD

Select [4], insert SACD disc, and press [ENTER] key, and the adjustment will be made through the following steps, then adjusted values will be written to the EEPROM. However, if SACD disc is not available, use the player with initial data, skipping the SACD adjustment. In this case, you can finish the adjustment if pressing the [■] button.

SACD Adjustment Steps
1. Sled Tilt Reset
2. Set Disc Type CD
3. LD ON
4. Spdl Start
5. Wait 500 msec
6. Focus Servo ON 0
7. Auto track Offset Adjust
8.
9. CLVA ON
10. Wait 500 msec
11. Tracking ON
12. Wait 1 sec
13. Sled ON
14. Check CLV ON
15. Auto Focus Offset Adjust
17.
18. Auto Focus Gain Adjust
19. Auto Focus Offset Adjust
20. Eq Boost Adjust
21. Auto LFO Adjust
22. Auto Track Gain Adjust

23. 32Tj Fwd
24. 32Tj Rev
25. 500Tj Fwd
26. 500Tj Rev

27. All Servo Stop */

3-11. DRIVE MANUAL OPERATION

On the Test Mode Menu screen, select [2], and the manual operation menu will be displayed. For the manual operation, each servo on/off control and adjustment can be executed manually.

```
  ## Drive Manual Operation ##

         Operation Menu
1. Disc type
2. Servo Control
3. Track/Layer Jump
4. Manual Adjustment
5. Auto Adjustment
6. Memory Check
7. Sacd Water Mark
0. Disc Check Memory
_
                  Exit: Return
```

In using the manual operation menu, take care of the following points. These commands do not provide protection, thus requiring correct operation. The sector address or time code field is displayed when a disc is loaded.

1. Set correctly the disc type to be used on the Disc Type screen.
   The disc type must be set after a disc was loaded.
   The set disc type is cleared when the tray is opened.
2. After power ON, if the Drive Manual Operation was selected, first perform “Reset SLED TILT” by opening 1. Disc Type screen.
3. In case of an alarm, immediately press the [■] button to stop the servo operation, and turn the power OFF.

Basic operation (controllable from front panel or remote commander)

[POWER]	Power OFF
[■]	Servo stop
[OPEN/CLOSE]	Stop+Eject/Loading
[RETURN]	Return to Operation Menu or Test Mode Menu
[NEXT], [PREV]	Transition between sub modes of menu
[1] to [9], [0]	Selection of menu items
Cursor UP/DOWN	Increase/Decrease in manually adjusted value

0. Disc Check Memory

```
          Disc Check



1. SL Disc Check
2. CD Disc Check
3. DL Disc Check



0. Reset SLED TILT
_
```

On this screen, the mirror time is measured to judge the disc and it is written to the EEPROM. First load DVD SL disc and press [1], next load CD disc and press [2], and finally load DVD DL disc and press [3].
The adjustment must be executed more than once after default data were written. External vibration or shock to the player must not be given. Reference value for DVD is from 10 to 20, and for CD, from 28 to 4F.
Check that the value of CD is larger than that of DVD.
When those values are beyond a range perform this adjustment again.
From this screen, you can go to another mode by pressing [NEXT] or [PREV] key, but you cannot enter this mode from another mode.
You can enter this mode from the Operation Menu screen only.

1. Disc Type

```
          Disc Type
1. Disc Type Auto Check
2. DVD SL   12 cm
3. DVD DL   12 cm
4. CD       12cm
5. LCD      12 cm
6. DVD SL   8 cm
7. DVD DL   8 cm
8. CD       8 cm
9. LCD      8 cm
0. Reset SLED TILT
                        EMG. 00
```

On this screen, select the disc type. To select the disc type, press the number of the loaded disc. The selected disc type is displayed at the bottom. Selecting [1] automatically selects and displays the disc type. In case of wrong display, retry "Disc Check Memory". Also, opening the tray causes the set disc type to be cleared. In this case, set the disc type again after loading.
In performing manual operation, the disc type must be set.
Once the disc type has been selected, the sector address or time code display field will appear as shown below. These values are displayed when PLL is locked.

```
          Disc Type
1. Disc Type Auto Check
2. DVD SL   12 cm
3. DVD DL   12 cm
4. CD       12cm
5. LCD      12 cm
6. DVD SL   8 cm
7. DVD DL   8 cm
8. CD       8 cm
9. LCD      8 cm
0. Reset SLED TILT
       SA.      SI.    EMG. 00
DVD SL 12 cm
```

Display when DVD SL 12cm disc was selected

```
          Disc Type
1. Disc Type Auto Check
2. DVD SL   12 cm
3. DVD DL   12 cm
4. CD       12cm
5. LCD      12 cm
6. DVD SL   8 cm
7. DVD DL   8 cm
8. CD       8 cm
9. LCD      8 cm
0. Reset SLED TILT
        TC.——:——:—— EMG. 00
CD   12 cm
```

Display when CD 12cm disc was selected

[0] Reset SLED TILT	Reset the Sled and Tilt to initial position.
[1] Disk Type Check	Judge automatically the loaded disc. As the judged result is displayed at the bottom of screen, make sure that it is correct. If Disc Check Memory menu has not been executed after EEPROM default setting, the disc type cannot be judged. In this case, return to the initial menu and make a check for three types of discs (SL, DL, CD).
[2] to [9]	Select the loaded disc. The adjusted value is written to the address of selected disc. No further entry is necessary if [1] was selected.

2. Servo Control

```
          Servo Control
1. LD         Off R.Sled FWD
2. SP         Off L.Sled REV
3. Focus      Off
4. TRK.       Off
5. Sled       Off
6. CLVA       Off
7. FCS. Srch Off


0. Reset SLED TILT
        SA.———— SI.—— EMG. 00
DVD SL 12 cm
```

On this screen, the servo on/off control necessary for replay is executed. Normally, turn on each servo from 1 sequentially and when CLVA is turned on, the usual trace mode becomes active. In the trace mode, DVD sector address or CD time code is displayed. This is not displayed where the spindle is not locked.
The spindle could run overriding the control if the spindle system is faulty or RF is not present. In such a case, do not operate CLVA.

[0] Reset SLED TILT	Reset the Sled and Tilt to initial position.
[1] LD	Turn ON/OFF the laser.
[2] SP	Turn ON/OFF the spindle.
[3] Focus	Search the focus and turn on the focus.
[4] TRK	Turn ON/OFF the tracking servo.
[5] Sled	Turn ON/OFF the sled servo.
[6] CLVA	Turn ON/OFF normal servo of spindle servo.
[7] FCS. Srch	Apply same voltage as that of focus search to the focus drive to check the focus drive system.
[→] Sled FWD	Move the sled outward. Perform this operation with the tracking servo turned off.
[←] Sled REV	Move the sled inward. Perform this operation with the tracking servo turned off.
[↑] Tilt UP	Move the tilt upward.
[↓] Tilt DOWN	Move the tilt downward.

The following menus are normally not used.

3. Track/Layer Jump

4. Manual Adjustment

5. Auto Adjustment

The persons who do not know well about these menus should not use them.

6. Memory Check

```
EEPROM Data1
                    -- DL --
              CD LCD   SL  L0  L1
Focus Gain    xx xx    xx  xx  xx
TRK. Gain     xx xx    xx  xx  xx
FCS Balance   xx xx    xx  xx  xx
Focus Bias    xx xx    xx  xx  xx
TRV. Offset   xx xx    xx  xx  xx
L. F. Offset  xx xx    xx  xx  xx
EQ Boost      xx xx    xx  xx  xx
Mirror Time   xx xx    xx  xx  xx
_DOWN: Next Data
CLEAR: Default Set      page.1/2
```

```
EEPROM Data1
                    -- DL --
              CD LCD   SL  L0  L1
RF Jitter     xx --    xx  xx  xx
RF Level      xx --    xx  --  --
FE Level      xx --    xx  --  --
FE Balance    xx --    xx  --  --
TRV. Level    xx --    xx  --  --
Analog FRSW   xx xx    xx  xx  xx
PLL DacGain   xx xx    xx  xx  xx
_
 UP   : Prev Data
CLEAR: Default Set      page.2/2
```

This screen displays current servo adjusted data stored in the EEPROM. Though adjusted data can be initialized with the [CLEAR] key, they cannot be restored after initialization.
So, before clearing, make a note of the adjusted data.
For reference, the drive has been designed so that the gain center value is 20 and offset value is 80. Other values will be in a range of 10 to 80. If extreme value such as 00 or FF is set, adjustment will be faulty. In such a case, check for disc scratch or cable disconnection, then perform adjustment again.

7. Sacd Water Mark

4-12. MECHA AGING

```
    ### Aging Test MENU ###

         Operation Menu

1.Changer Open/Close Test

2.Changer Exchange Test




_
                    Exit: RETURN
```

On the Test Mode Menu Screen, selecting [3] executes the aging of the mechanism. Start aging with PLAY. During aging, the repeat cycle is displayed. Aging can be aborted at any time by pressing the [■] key. After the operation is stopped, press the [RETURN] key again to return to the Test Mode Menu.

3-13. EMERGENCY HISTORY

```
      ### EMG. History ###

Laser Hours     CD   xxxxxxxh
                DVD  xxxxxxxh

1. 00 00 00 00  00 00 00 00
   00 00 00 00  00 00 00 00

2. 00 00 00 00  00 00 00 00
   00 00 00 00  00 00 00 00

Select: 1 - 9   Scroll: UP/DOWN
(1: Last EMG.)   Exit: RETURN
```

On the Test Mode Menu screen, selecting [4] displays the information such as servo emergency history. The history information from last 1 up to 10 can be scrolled with [↑] key or [↓] key. Also, specific information can be displayed by directly entering that number with ten keys.

The upper two lines display the laser ON total hours. Data below minutes are omitted.

Clearing History Information

Clearing laser hours
◎ Press [DVD DISPLAY] and [CLEAR] keys in this order.
Both CD and DVD data are cleared.
Clearing emergency history
◎ Press [TITLE] and [CLEAR] keys in this order.
Initializing set up data
◎ Press [DVD MENU] and [CLEAR] keys in this order.
The data have been initialized when "Set Up Initialized" message is displayed. The EMG. History screen will be restored soon.

How to see Emergency History

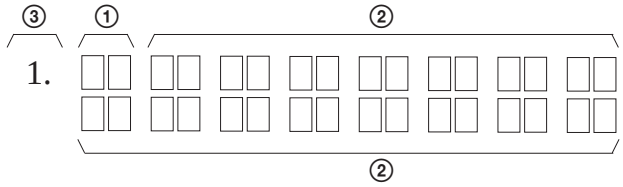

① : Emergency Code
② : Don't Care
These codes are used for verification of software designing.
③ : Historical order 1 to 9

Emergency Codes List

10: Communication to IC001 (RF-240 board) failed.
11: Each servo for focus, tracking, and spindle is unlocked.
12: Communication to EEPROM, IC101 (DVD board) failed.
13: Writing of hours meter data to EEPROM, IC101 (DVD board) failed.
14: Communication to Servo DSP IC302 (DVD board) failed, or Servo DSP is faulty.
20: Initialization of tilt servo and sled servo failed. They are not placed in the initial position.
21: Tilt servo operation error
22: Syscon made a request to move the tilt servo to wrong position.
23: Sled servo operation error
24: Syscon made a request to move the sled servo to wrong position.
30: Tracking balance adjustment error
31: Tracking gain adjustment error
32: Focus balance adjustment error
33: Focus bias adjustment error
34: Focus gain adjustment error
35: Tilt servo adjustment error
36: RF equalizer adjustment error
37: RF group delay adjustment error
38: Jitter value after adaptive servo operation is too large.
40: Focus servo does not operate.
41: With a dual layer (DL) disc, focus jump failed.50: CLV (spindle) servo does not operate.
51: Spindle does not stop.
60: With a DVD disc, Syscon made a request to seek nonexistent address.
61: With a CD disc, Syscon made a request to seek nonexistent address.
62: With a CD disc, Syscon made a request to seek nonexistent track No. and index No.
63: With a DVD disc, seeking of target address failed.
64: With a CD disc, seeking of target address failed.
65: With a CD disc, seeking of target index failed.
70: With a DVD disc, physical information data could not be read.
71: With a CD disc, TOC data could not be read.
80: Disc type judgment failed.
81: As disc type judgment failed, retry was repeated.
82: As disc type judgment failed, a measurement error occurred.
83: Disc type could not be judged within the specified time.
84: Illegal command code was received from Syscon.
85: Illegal command was received from Syscon.

3-14. VERSION INFORMATION

```
   ## Version Information ##

IF con.    Ver: x. xxx (xxxx)
           Group    00

SYScon.    Ver: x. xxx (xxxx)
           Model    xx
           Region   0x


Servo DSP Ver:X.XXX
OPT Type:2 Laser
                    Exit: RETURN
```

On the Test Mode Menu screen, selecting [5] displays the ROM version and region code.
The parenthesized hexadecimal number in version field is checksum value of ROM.

3-15. VIDEO LEVEL ADJUSTMENT

On the Test Mode Menu screen, selecting [6] displays color bars for video level adjustment. During display of color bars, OSD disappears but the menu screen will be restored if pressing any key.

Measurement point : MONITOR OUT VIDEO
(75 Ω terminating resistance)
Measuring instrument : Oscilloscope
Adjustment device : RV501 on DVD board
Specified value : 1.0 ± 0.02 Vpp

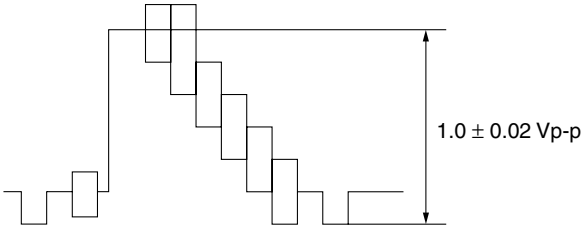

SECTION 4
ELECTRICAL ADJUSTMENT

In making adjustment, refer to 5-2. Adjustment Related Parts Arrangement.

Note: During diagnostic check, the characters and color bars can be seen only with the NTSC monitor. Therefore, for diagnostic check, use the monitor that supports both NTSC and PAL modes

This section describes procedures and instructions necessary for adjusting electrical circuits in this set.

Instruments required:

1) Color monitor TV
2) Oscilloscope 1 or 2 phenomena, band width over 100 MHz, with delay mode
3) Frequency counter (over 8 digits)
4) Digital voltmeter
5) Standard commander
   * RM-SS800 (1-418-838-11)
6) DVD reference disc
   HLX-501 (J-6090-071-A) (dual layer)
   HLX-503 (J-6090-069-A) (single layer)
   HLX-504 (J-6090-088-A) (single layer)
   HLX-505 (J-6090-089-A) (dual layer)
7) SACD reference disc
   HLXA-509 (J-6090-090-A)

   * Use only the designated remote control when adjusting this system component.

4-1. ADJUSTMENT OF VIDEO SYSTEM

1. Video Level Adjustment (DVD BOARD)

<Purpose>

This adjustment is made to satisfy the NTSC standard, and if not adjusted correctly, the brightness will be too large or small.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	MONITOR OUT (VIDEO) connector (75 Ω terminated)
Instrument	Oscilloscope
Adjusting element	RV501
Specification	1.0 ± 0.02 Vp-p

Adjusting method:

1) In the test mode initial menu “6” Video Level Adjustment, set so that color bars are generated.
2) Adjust the RV501 to attain 1.0 ± 0.02 Vp-p.

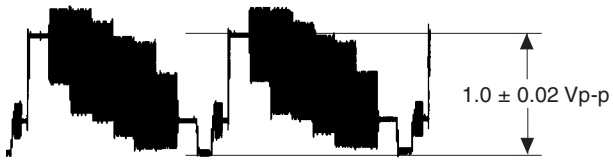

Figure 5-1

2. S-terminal Output Check

<Purpose>

Check S-terminal video output. If it is incorrect, pictures will not be displayed correctly in spite of connection to the TV with a S-terminal cable.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	S VIDEO OUT (S-Y) connector (75 Ω terminated)
Instrument	Oscilloscope
Specification	1.0 ± 0.1 Vp-p

Checking method:

1) In the test mode initial menu “6” Video Level Adjustment, set so that color bars are generated.
2) Confirm that the S-Y level is 1.0 ± 0.1 Vp-p.

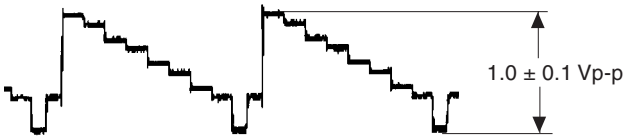

Figure 5-2

3. Checking S Video Output S-C (DVD BOARD)

<Purpose>

This checks whether the S-C satisfies the NTSC Standard. If it is not correct, the colors will be too dark or light.

Mode	Video level adjustment in test mode
Signal	Color bars
Test point	CN003 pin ②
Instrument	Oscilloscope
Specification	286 ± 50 mVp-p

Connection:

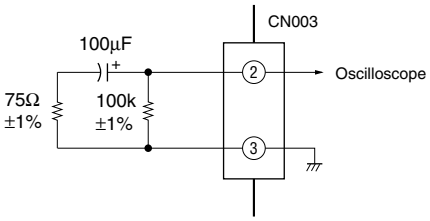

Checking method:

1) Confirm that the S-C burst is 286 ± 50 mVp-p.

Figure 5-3

4-2. ADJUSTMENT RELATED PARTS ARRANGEMENT

DVD BOARD (SIDE A)

SECTION 5
DIAGRAMS

• CIRCUIT BOARDS LOCATION

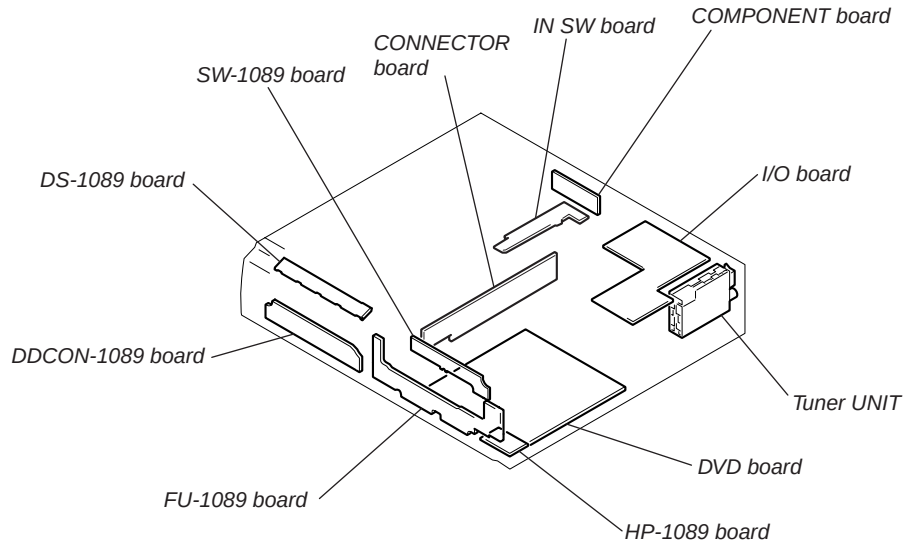

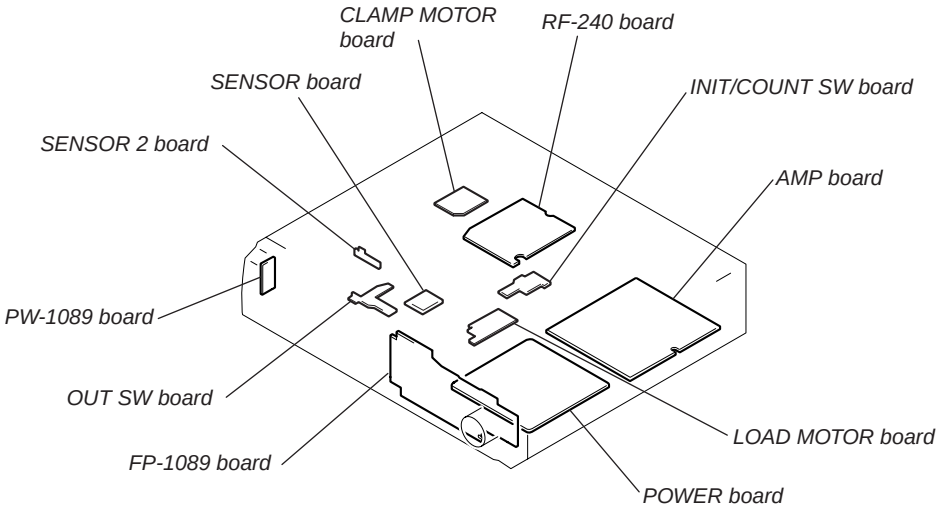

THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.
(In addition to this, the necessary note is printed in each block.)

For schematic diagrams.

Note:

- All capacitors are in µF unless otherwise noted. pF: µµF 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and 1/4 W or less unless otherwise specified.
- △ : internal component.
- ▭ : panel designation.

Note:	**Note:**
The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- ▬▬ : B+ Line.
- ▬ ▬ : B– Line.
- ▭ : adjustment for repair.
- Voltages and waveforms are dc with respect to ground under no-signal (detuned) conditions.
- Voltages and waveforms are dc with respect to ground in service mode.
- Waveforms are taken with a oscilloscope.
  Voltage variations may be noted due to normal production tolerances.
  no mark : STOP
- Circled numbers refer to waveforms.
- Signal path.
  - : FM
  - : CD
  - : DVD
  - : VIDEO
  - : Y
  - : CHROMA
  - : B-Y
  - : R-Y
- Abbreviation
  - AUS : Australian model
  - CND : Canadian model
  - HK : Hong Kong model
  - MX : Mexican model
  - MY : Malaysia model
  - SP : Singapore model

For printed wiring boards.

Note:

- ○——○ : parts extracted from the component side.
- ○ : Through hole.
- ▒▒▒ : Pattern from the side which enables seeing.

(The other layers' patterns are not indicated.)

Caution:	
Pattern face side: (Conductor B)	Parts on the pattern face side seen from the pattern face are indicated.
Parts face side: (Component A)	Parts on the parts face side seen from the parts face are indicated.

• Indication of transistor



• WAVEFORMS

– RF-240 BOARD –

① 1.5Vp-p — 500mV/DIV 100ns/DIV — IC001 ㊾ (SIGO) DVD PLAY

② 1.5Vp-p — 500mV/DIV 400ns/DIV — IC001 ㊾ (SIGO) CD PLAY

③ 1.8Vp-p — 500mV/DIV 40ms/DIV — IC001 ㊶ (TE) DVD PLAY

④ 1.8Vp-p — 500mV/DIV 200ms/DIV — IC001 ㊶ (TE) CD PLAY

⑤ 190mVp-p — 100mV/DIV 40ms/DIV — IC001 ㊷ (FE) DVD PLAY

⑥ 840mVp-p — 500mV/DIV 40ms/DIV — IC001 ㊷ (FE) CD PLAY

– DVD BOARD –

⑦ 3.5Vp-p — 6.25ns (16MHz) — IC901 ㊳ (X2)

⑧ 3.8Vp-p — 81.4ns (12.288MHz) — IC606 ⑳ (XMCK)

⑨ 3.5Vp-p — 74ns (13.5MHz) — IC607 ⑫ (MCLK2)

⑩ 2Vp-p — 37ns (27MHz) — IC102 ⑦ (XTI)

⑪ 3.4 Vp-p — *60.6ns (16.5MHz)* — IC103 ㊸ (X1)

– AMP BOARD –

⑫ 7.2 Vp-p — *20.3ns (49.152MHz)* — IC300 ④

⑬ *5 Vp-p* — *13 µs* — IC305 ⑬ (OUTL1+)

– I/O BOARD –

⑭ 2.5Vp-p — H — IC701 ⑭, ⑮ Test Mode (Video)

⑮ 2Vp-p — H — IC701 ⑨, ⑩ Test Mode (Video)

⑯ 0.9Vp-p — H — Q700 Ⓔ Test Mode (Video)

– COMPONENT BOARD –

⑰ *1.5 Vp-p* — H — IC703 ⑨, ⑩ Test Mode (Video)

⑱ *1.5 Vp-p* — H — IC703 ⑫, ⑬ Test Mode (Video)

⑲ H — *1.5 Vp-p* — IC703 ⑭, ⑮ Test Mode (Video)

5-1. BLOCK DIAGRAMS
– RF/SERVO, VIDEO SECTION –

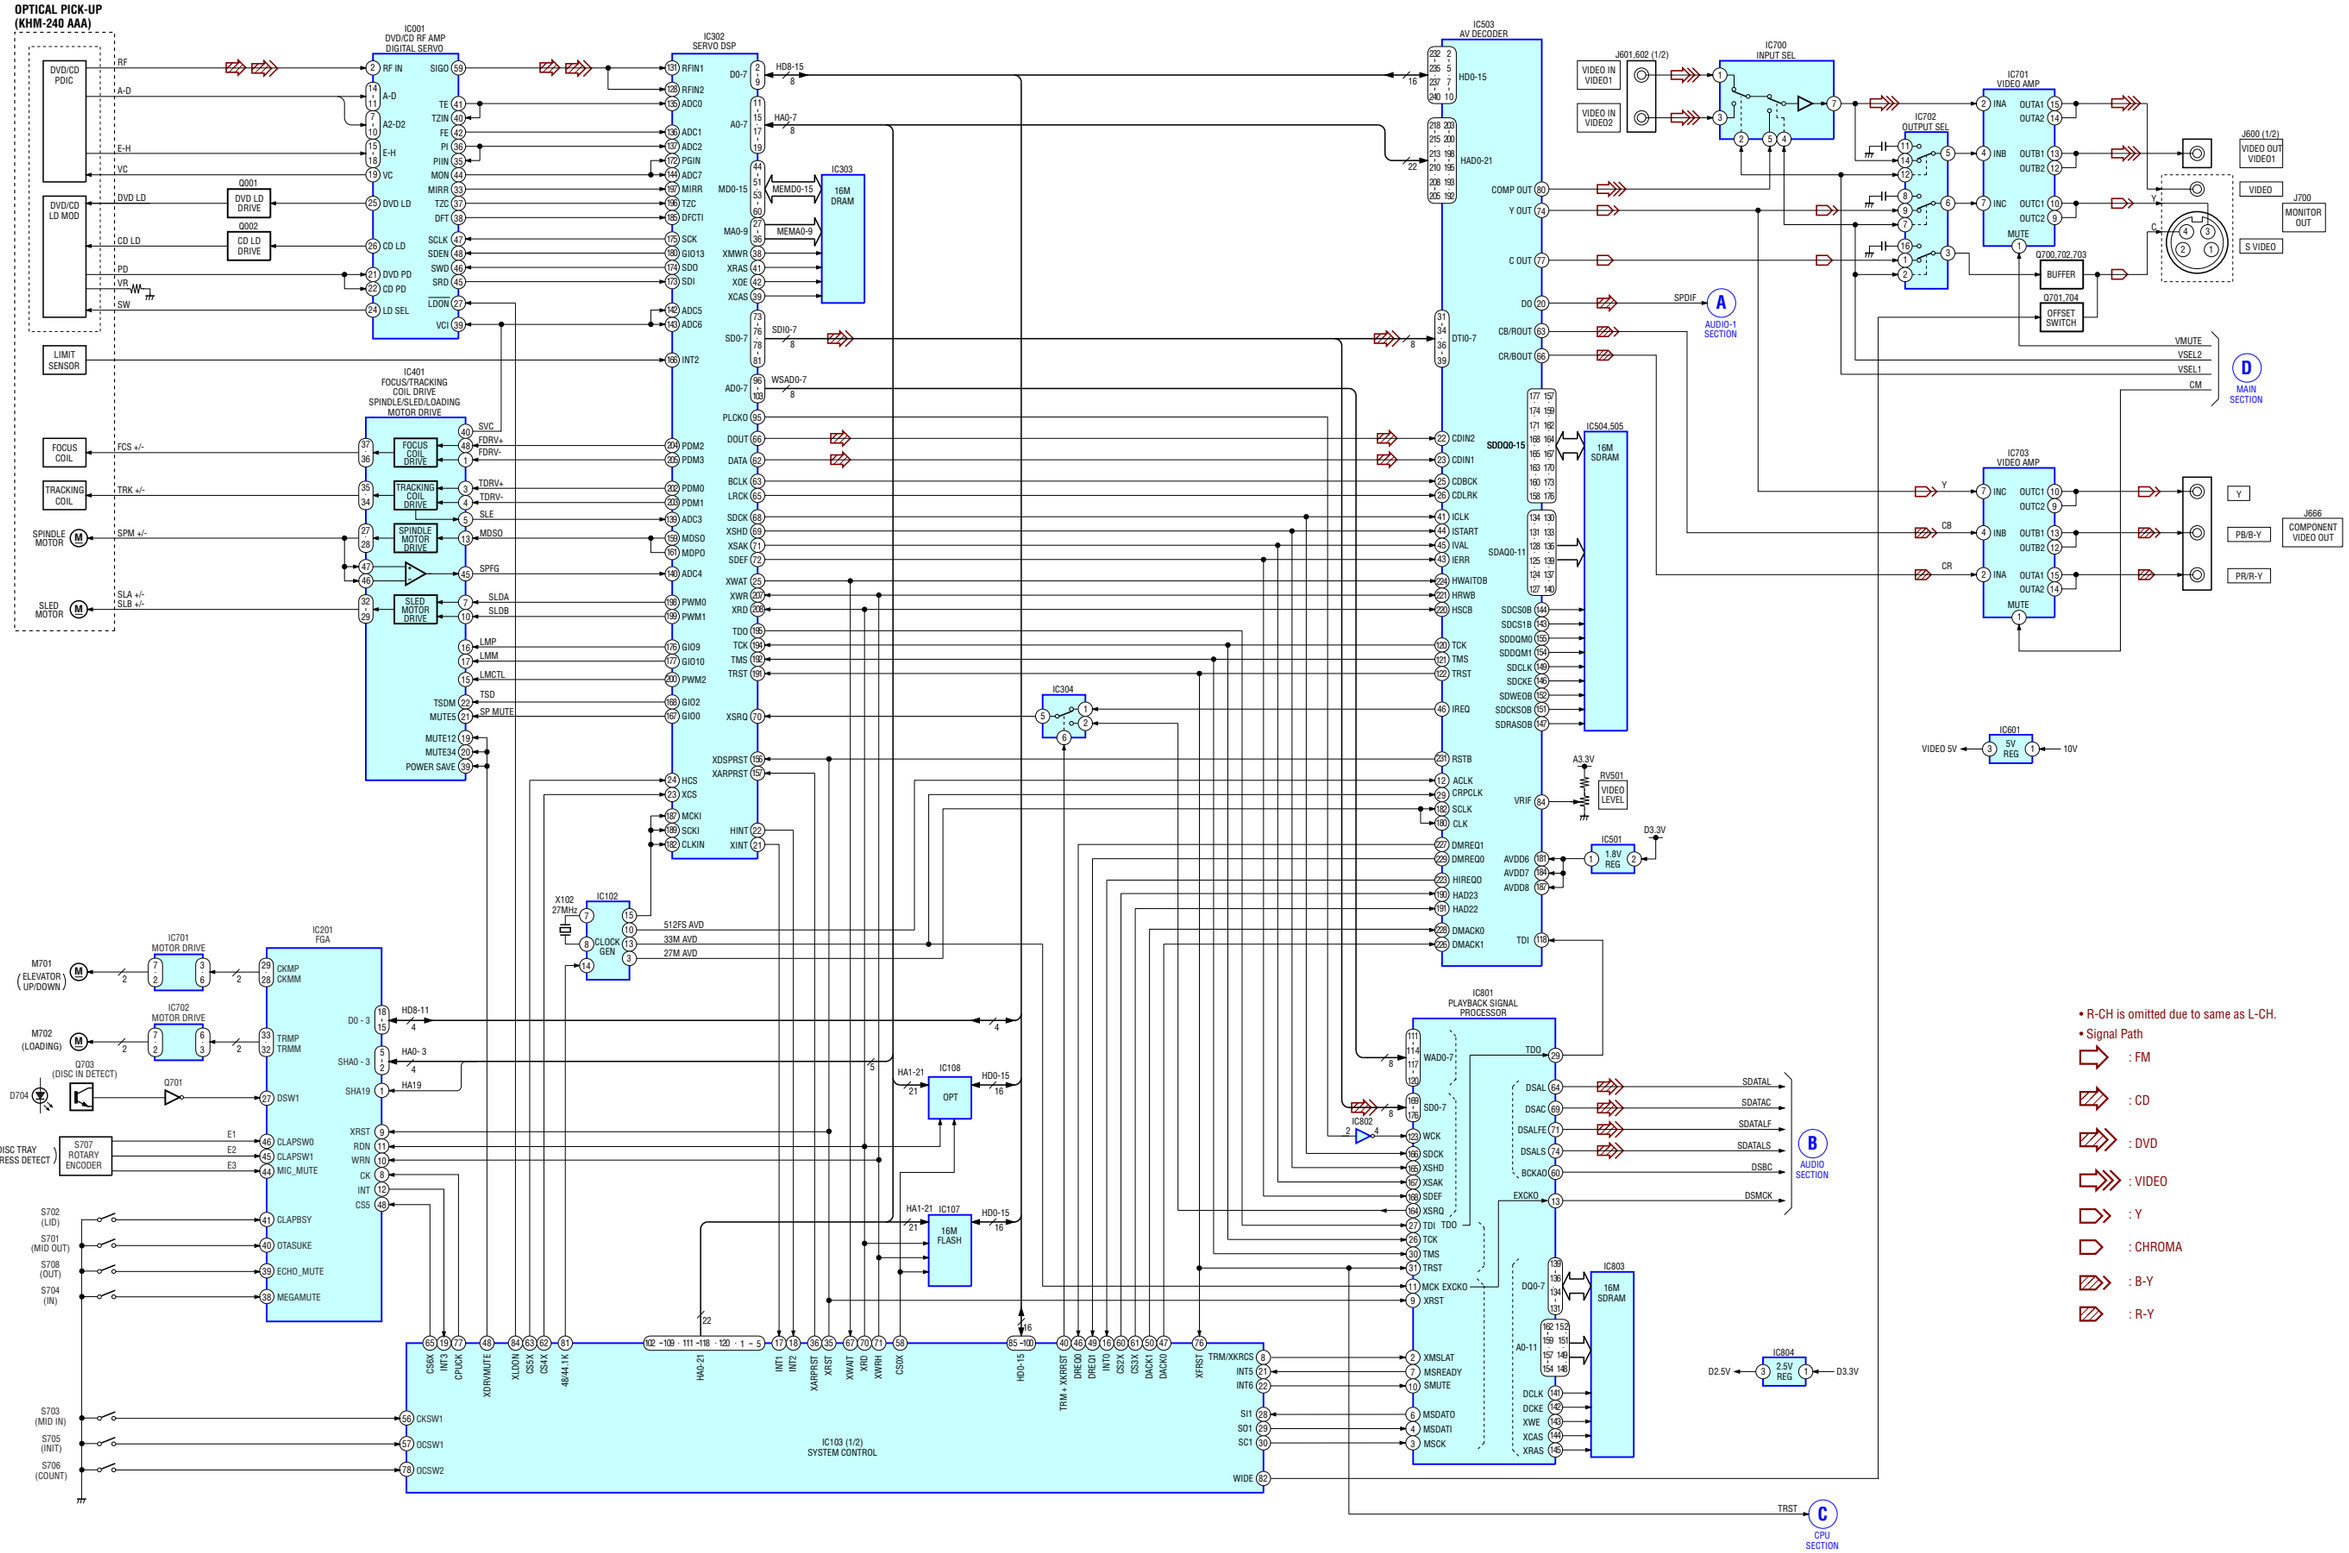

– CPU SECTION –

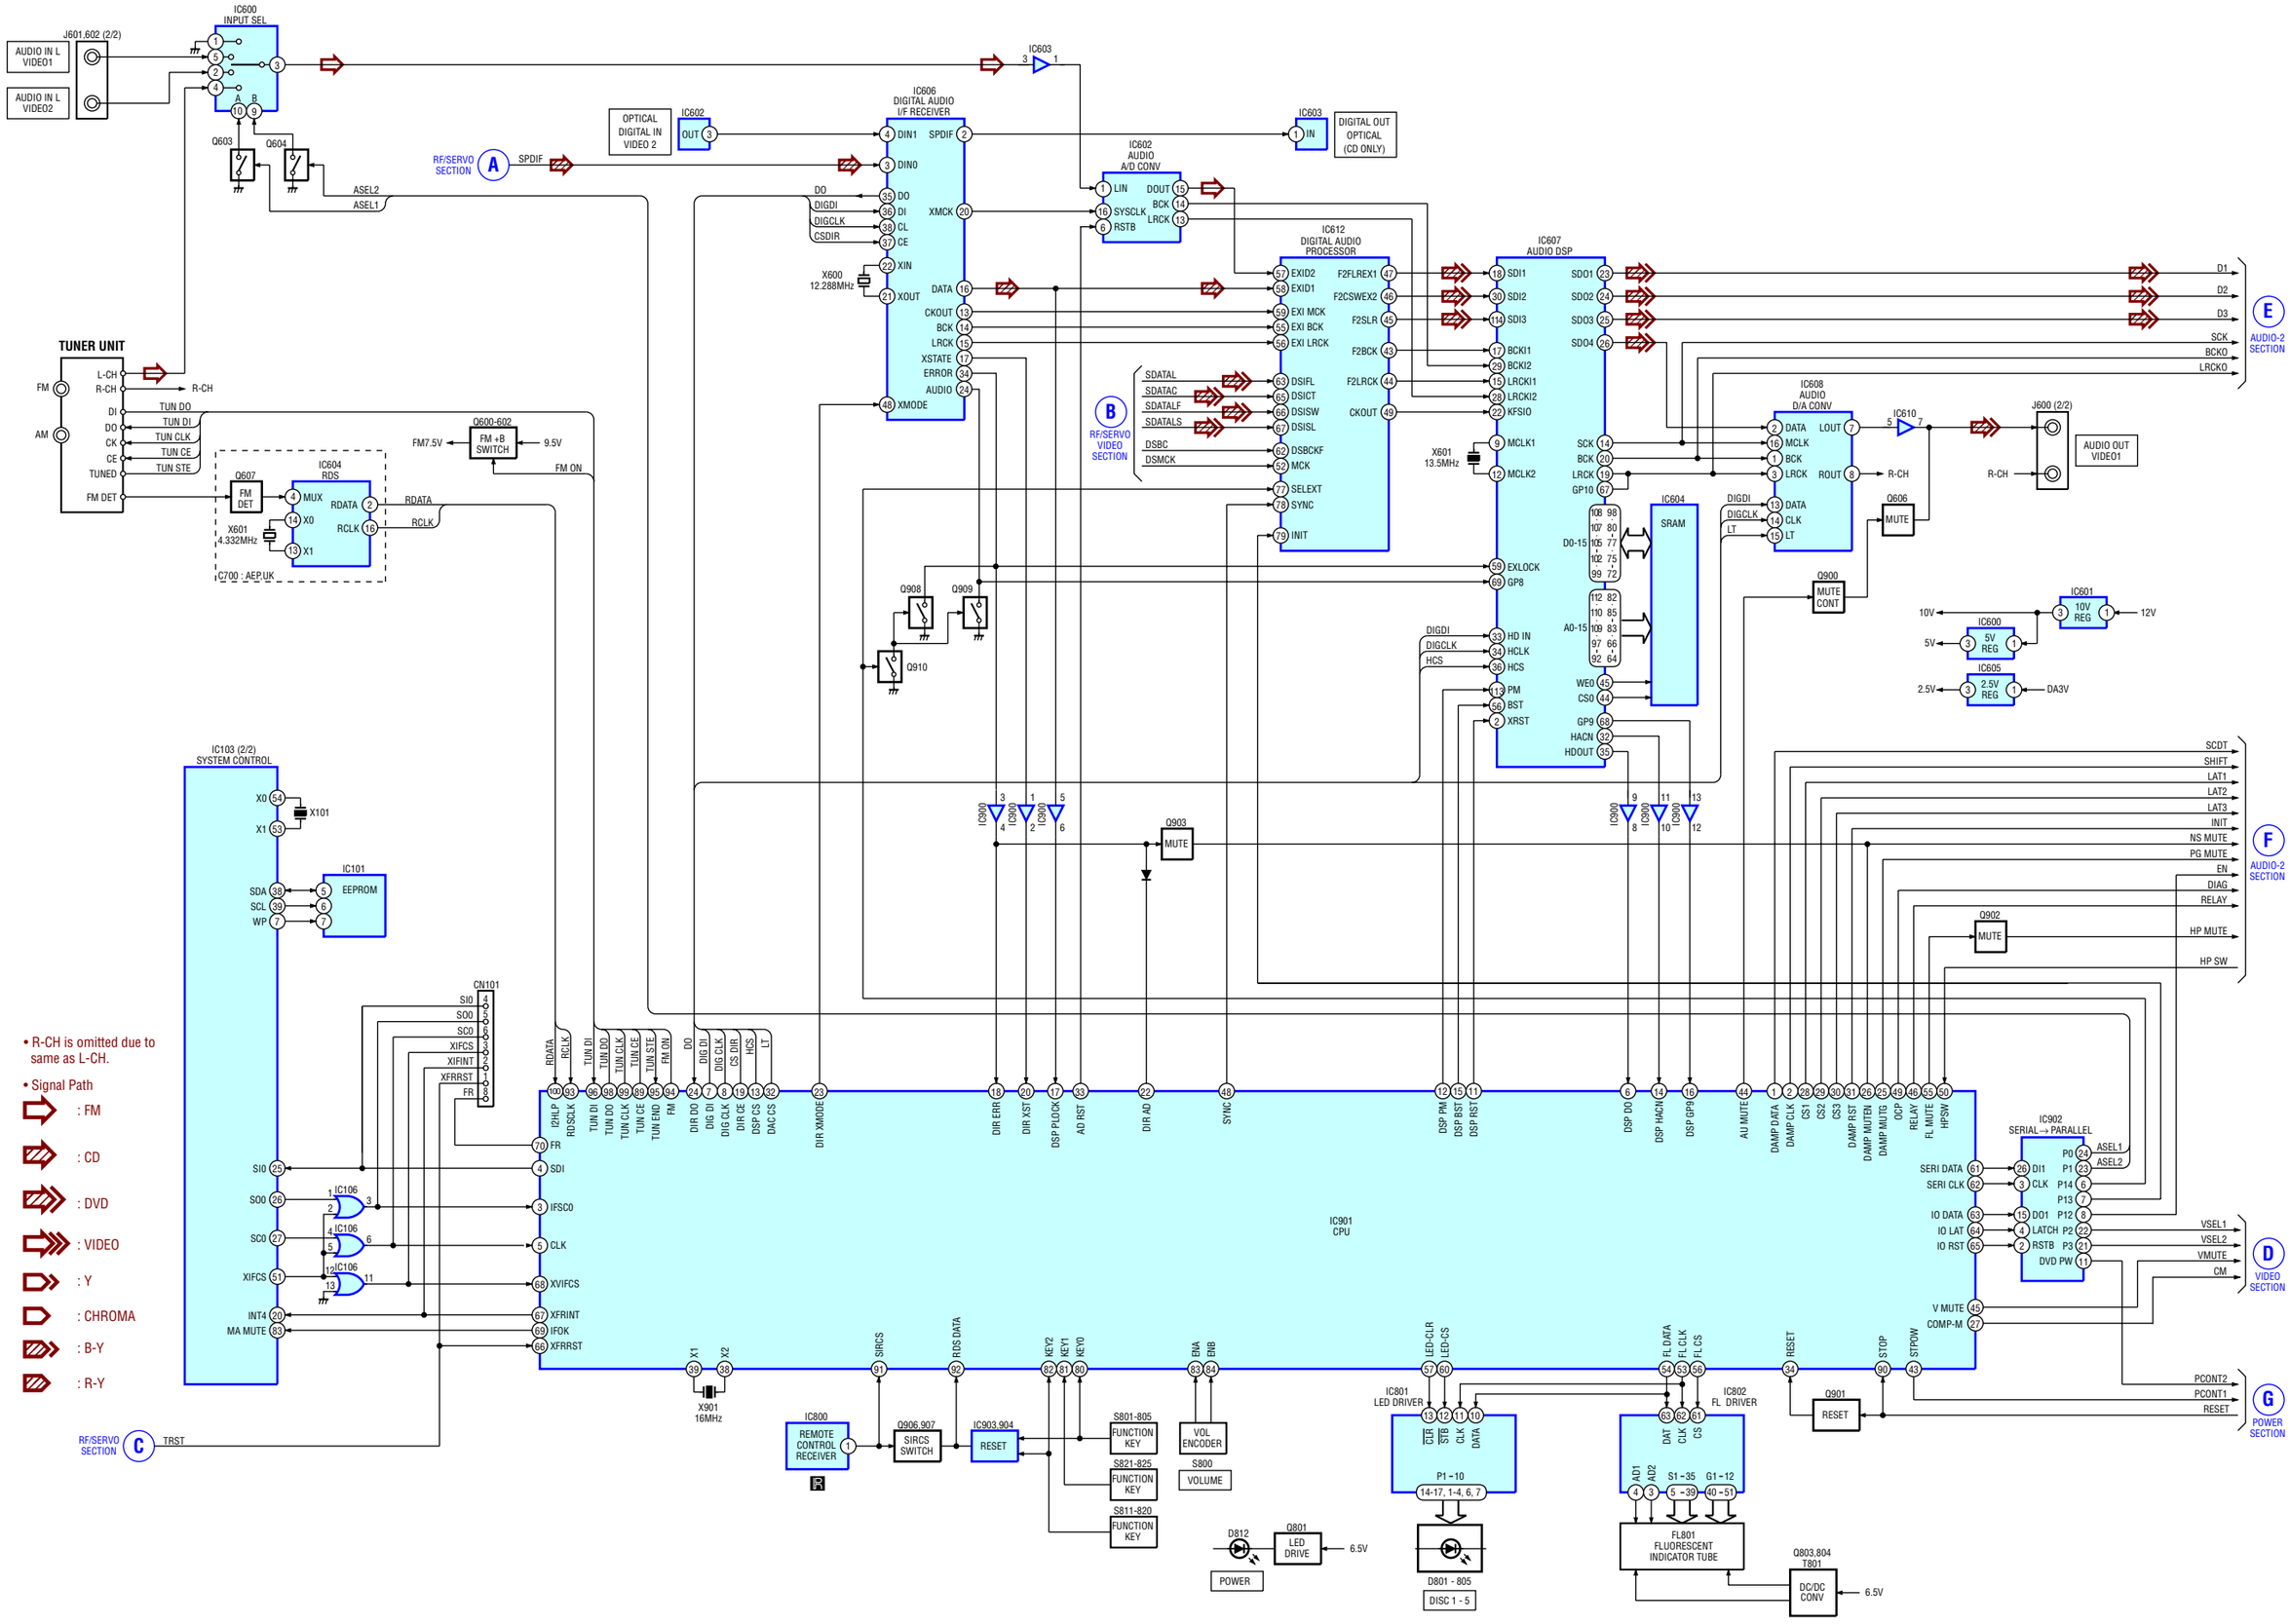
IC600 INPUT SEL
J601,602 (2/2)
AUDIO IN L VIDEO1
AUDIO IN L VIDEO2
Q603
Q604
ASEL2
ASEL1
IC603
OPTICAL DIGITAL IN VIDEO 2
IC602
RF/SERVO SECTION A
SPDIF
IC606 DIGITAL AUDIO I/F RECEIVER
DIN1
DIN0
DO
DIGDI
DIGCLK
CSDIR
XIN
XOUT
X600 12.288MHz
DATA
CKOUT
BCK
LRCK
XSTATE
ERROR
AUDIO
XMODE
IC602 AUDIO A/D CONV
LIN
SYSCLK
RSTB
DOUT
BCK
LRCK
IC603
DIGITAL OUT OPTICAL (CD ONLY)
IC612 DIGITAL AUDIO PROCESSOR
EXID2
EXID1
EXI MCK
EXI BCK
EXI LRCK
DSIFL
DSICT
DSISW
DSISL
DSBCK
MCK
SELEXT
SYNC
INIT
F2FLREX1
F2CSWEX2
F2SLR
F2BCK
F2LRCK
CKOUT
SDATAL
SDATAC
SDATALF
SDATALS
DSBC
DSMCK
B RF/SERVO VIDEO SECTION
IC607 AUDIO DSP
SDI1
SDI2
SDI3
BCKI1
BCKI2
LRCKI1
LRCKI2
KFSIO
MCLK1
MCLK2
X601 13.5MHz
EXLOCK
GP8
HD IN
HCLK
HCS
PM
BST
XRST
SDO1
SDO2
SDO3
SDO4
SCK
BCK
LRCK
GP10
D0-15
A0-15
WE0
CS0
GP9
HACN
HDOUT
IC604 SRAM
D1
D2
D3
SCK
BCKO
LRCKO
E AUDIO-2 SECTION
IC608 AUDIO D/A CONV
DATA
MCLK
BCK
LRCK
LOUT
ROUT
IC610
J600 (2/2)
AUDIO OUT VIDEO1
R-CH
Q606
MUTE
DIGDI
DIGCLK
LT
CLK
Q900
MUTE CONT
IC601
10V REG
12V
IC600
5V REG
5V
IC605
2.5V REG
2.5V
DA3V
TUNER UNIT
FM
AM
L-CH
R-CH
DI
DO
CK
CE
TUNED
FM DET
TUN DO
TUN DI
TUN CLK
TUN CE
TUN STE
Q607
FM DET
IC604 RDS
MUX
X0
X1
RDATA
RCLK
X601 4.332MHz
C700 : AEP,UK
Q600-602
FM +B SWITCH
FM7.5V
9.5V
FM ON
Q908
Q909
Q910
IC103 (2/2) SYSTEM CONTROL
X0
X1
X101
IC101
EEPROM
SDA
SCL
WP
CN101
SI0
SO0
SCO
XIFCS
XIFINT
XFRRST
FR
IC106
INT4
MA MUTE
RDATA
RCLK
TUN DI
TUN DO
TUN CLK
TUN CE
TUN STE
FM ON
DO
DIG DI
DIG CLK
CS DIR
HCS
LT
I2HLP
RDSCLK
FR
SDI
IFSCO
CLK
XVIFCS
XFRINT
IFOK
XFRRST
DIR XMODE
DIR ERR
DIR XST
DSP PLOCK
AD RST
DIR AD
SYNC
DSP PM
DSP BST
DSP RST
DSP DO
DSP HACN
DSP GP9
AU MUTE
DAMP DATA
DAMP CLK
CS1
CS2
CS3
DAMP RST
DAMP MUTEN
DAMP MUTG
OCP
RELAY
FL MUTE
HPSW
IC901 CPU
IC902 SERIAL→PARALLEL
SERI DATA
SERI CLK
IO DATA
IO LAT
IO RST
DVD PW
V MUTE
COMP-M
ASEL1
ASEL2
VSEL1
VSEL2
VMUTE
CM
D VIDEO SECTION
SCDT
SHIFT
LAT1
LAT2
LAT3
INIT
NS MUTE
PG MUTE
EN
DIAG
RELAY
HP MUTE
HP SW
F AUDIO-2 SECTION
Q902
MUTE
Q903
MUTE
IC900
PCONT2
PCONT1
RESET
G POWER SECTION
X1
X2
X901 16MHz
IC800 REMOTE CONTROL RECEIVER
SIRCS
RDS DATA
Q906,907 SIRCS SWITCH
IC903,904 RESET
KEY2
KEY1
KEY0
S801-805 FUNCTION KEY
S821-825 FUNCTION KEY
S811-820 FUNCTION KEY
ENA
ENB
VOL ENCODER
S800 VOLUME
D812
POWER
Q801 LED DRIVE
6.5V
IC801 LED DRIVER
LED-CLR
LED-CS
CLR
STB
CLK
DATA
P1 - 10
14-17, 1-4, 6, 7
D801 - 805
DISC 1 - 5
IC802 FL DRIVER
FL DATA
FL CLK
FL CS
DAT
CLK
CS
AD1
AD2
S1 - 35
G1 - 12
FL801 FLUORESCENT INDICATOR TUBE
Q901
RESET
RESET
STOP
STPDW
Q803,804 T801
DC/DC CONV
6.5V
• R-CH is omitted due to same as L-CH.
• Signal Path
: FM
: CD
: DVD
: VIDEO
: Y
: CHROMA
: B-Y
: R-Y
RF/SERVO SECTION C
TRST

HCD-C700/C900

– POWER SECTION –

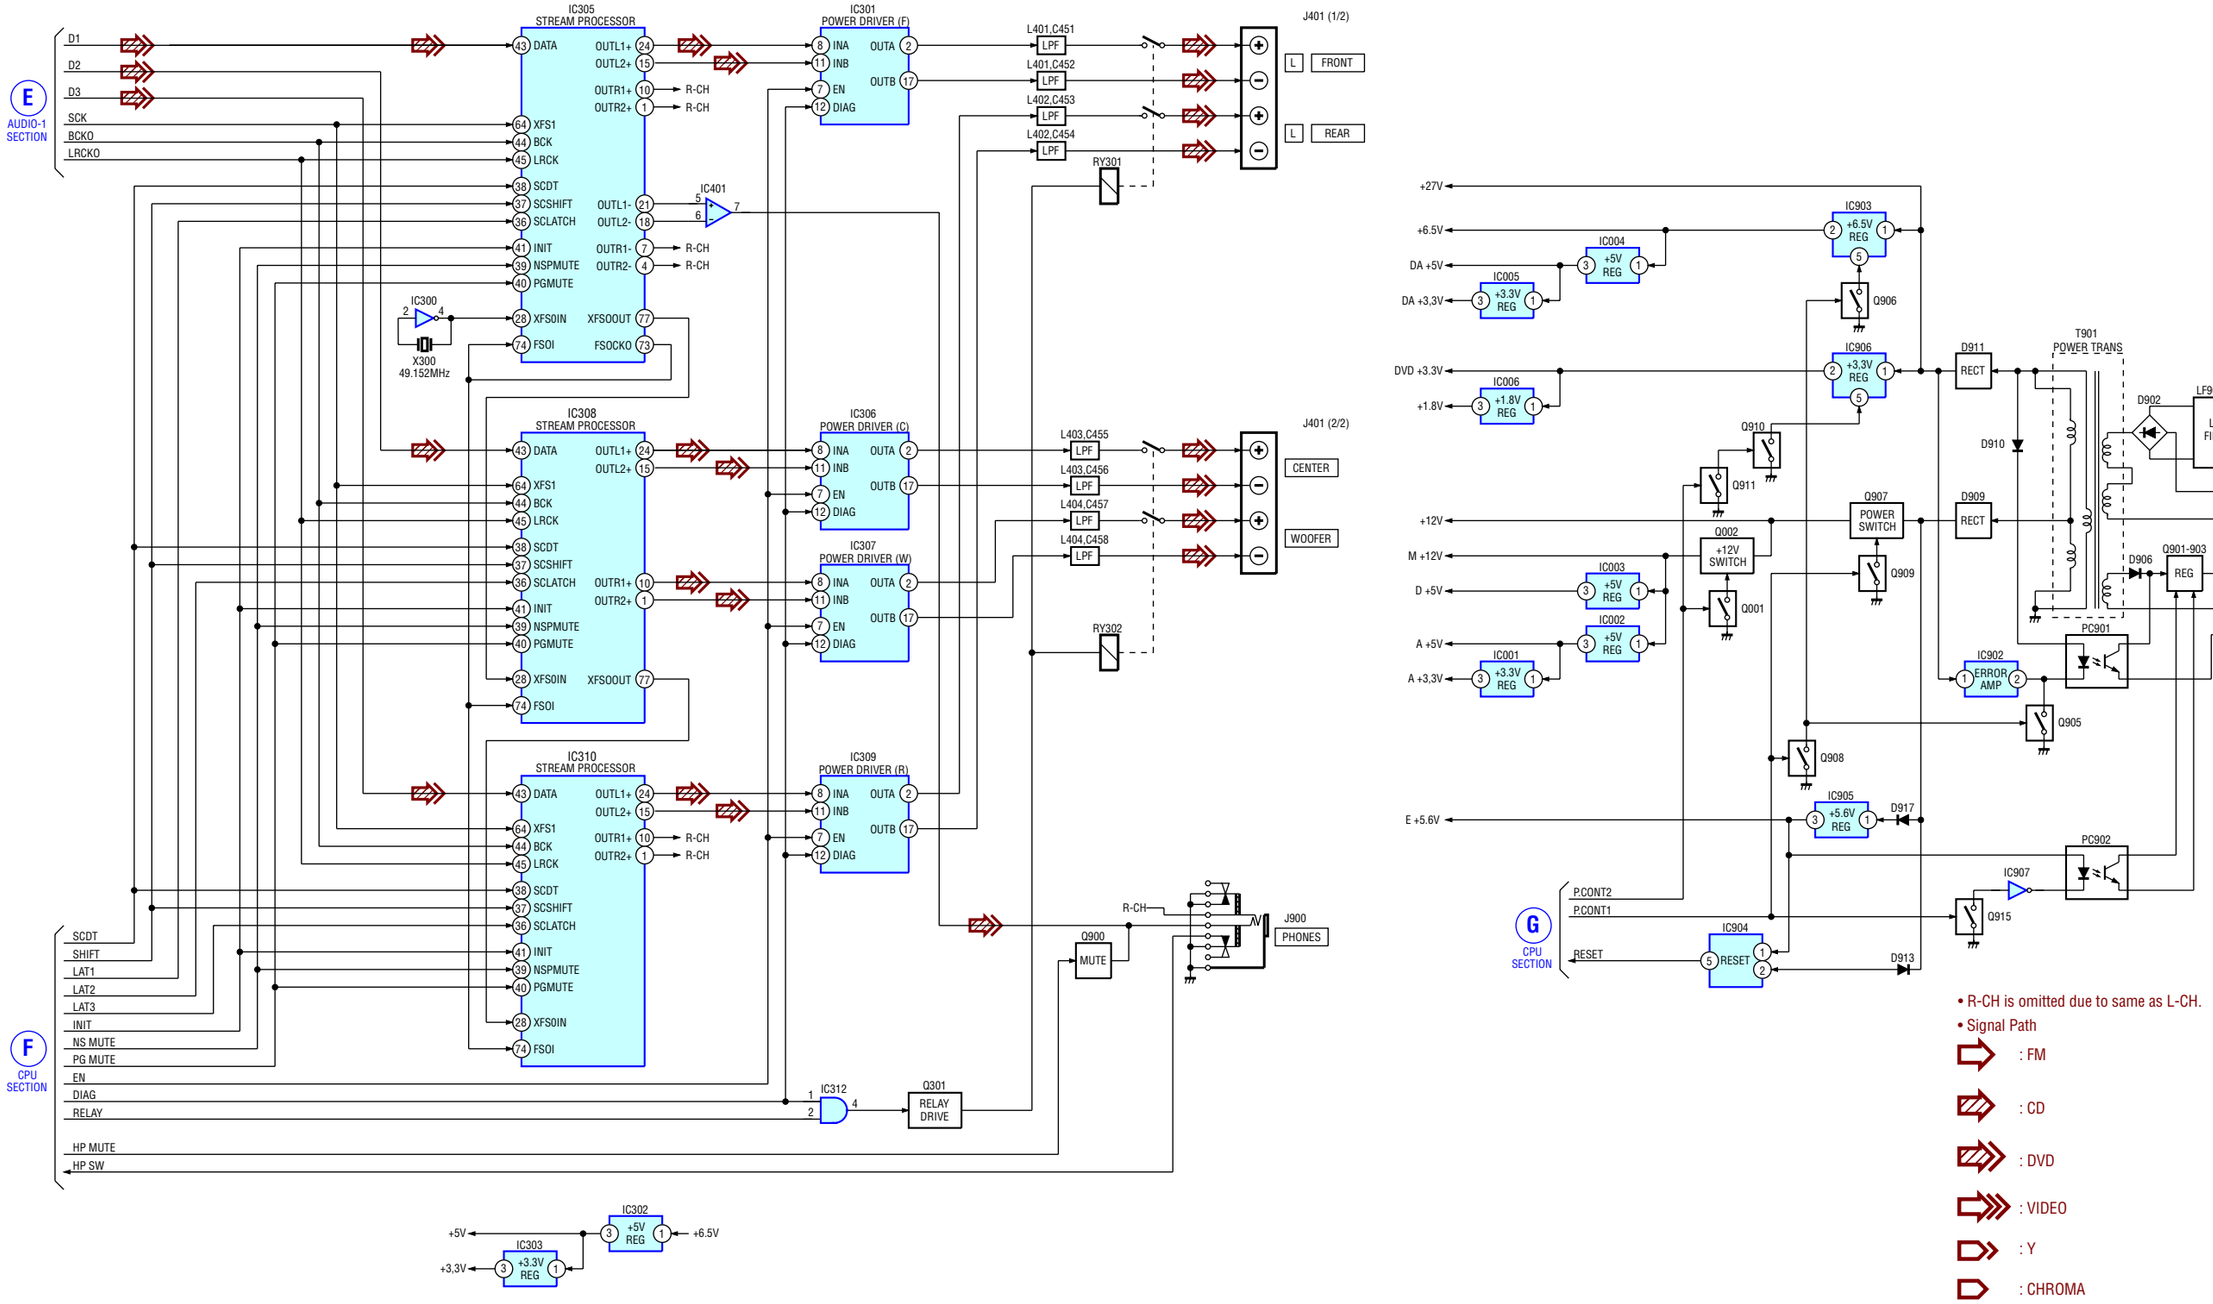

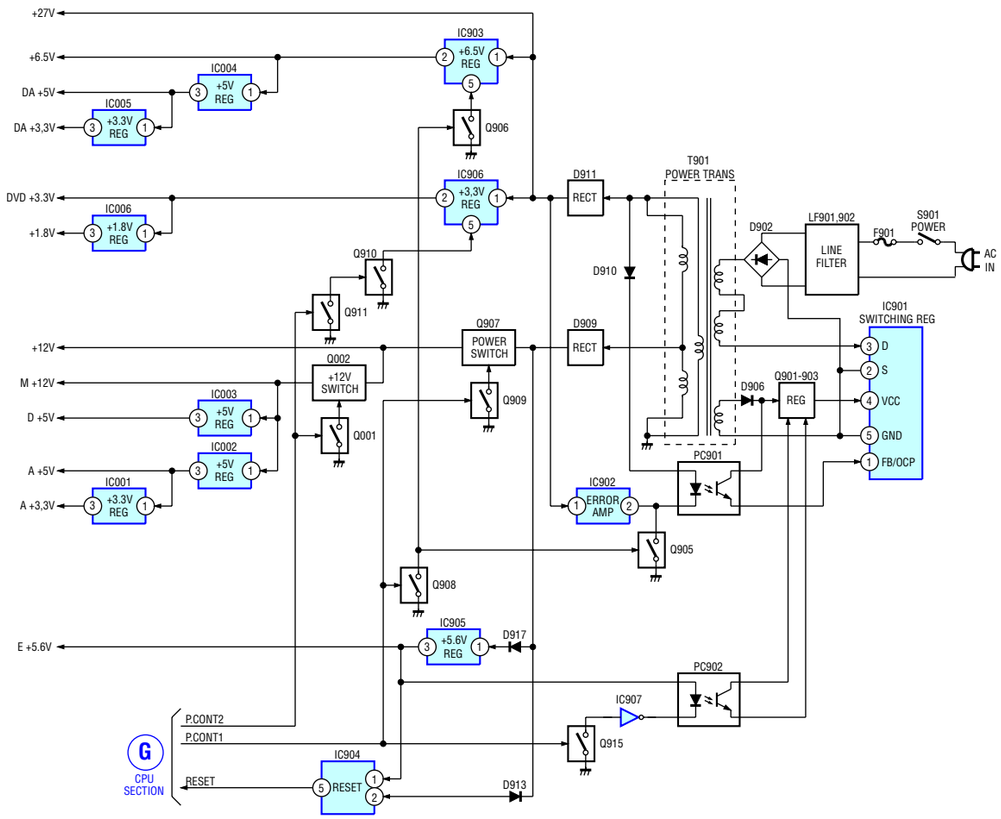

- R-CH is omitted due to same as L-CH.
- Signal Path

: FM

: CD

: DVD

: VIDEO

: Y

: CHROMA

5-2. PRINTED WIRING BOARD – RF SECTION – • See page 30 for Circuit Boards Location.

【RF-240 BOARD】(SIDE A)

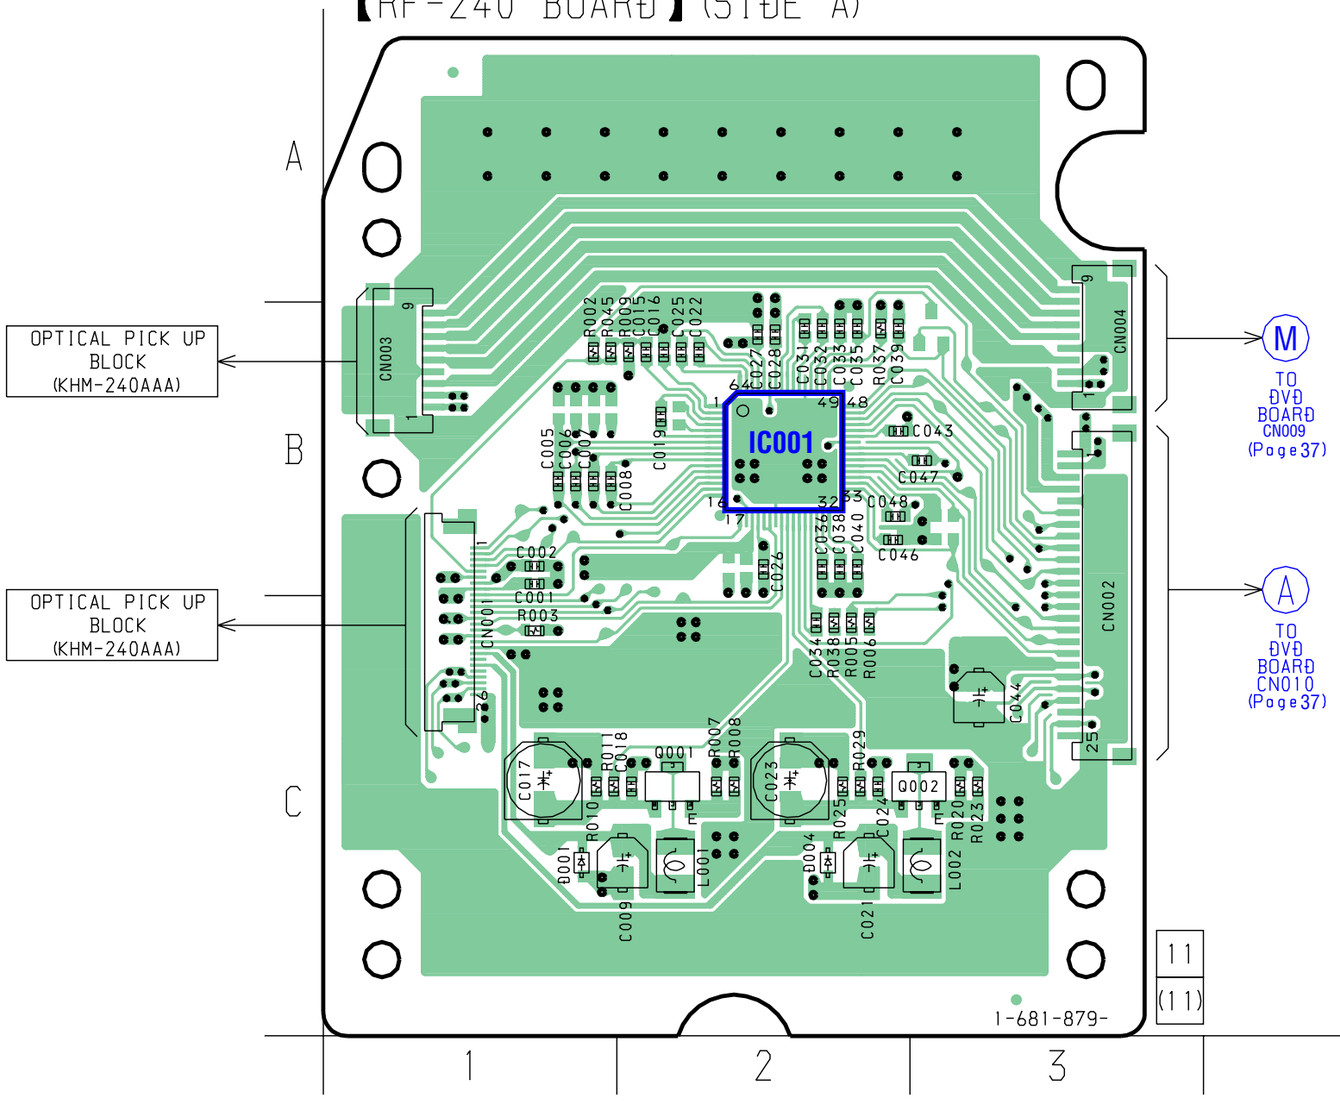

【RF-240 BOARD】(SIDE B)

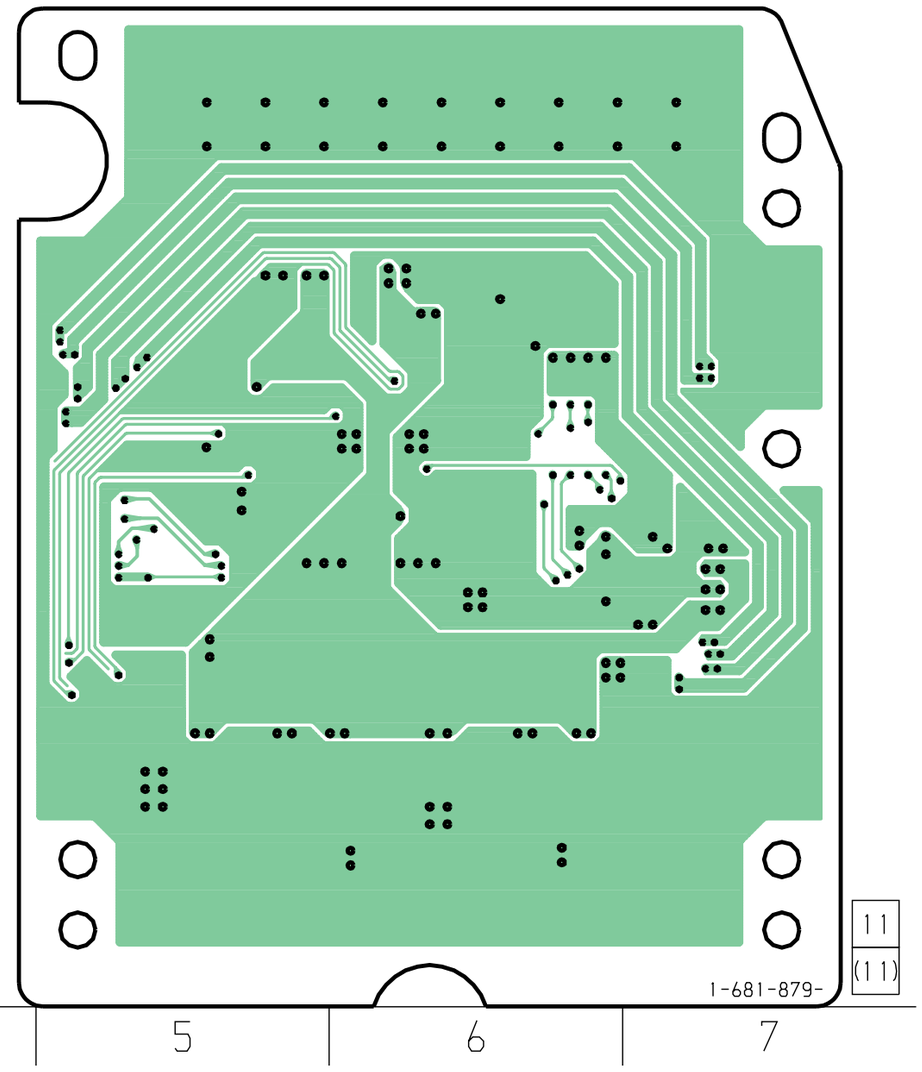

• **Semiconductor Location**

Ref. No.	Location
D001	C-1
D004	C-2
IC001	B-2
Q001	C-2
Q002	C-3

5-3. SCHEMATIC DIAGRAM – RF SECTION – • See page 31 for Waveforms. • See page 65 for IC Block Diagrams.

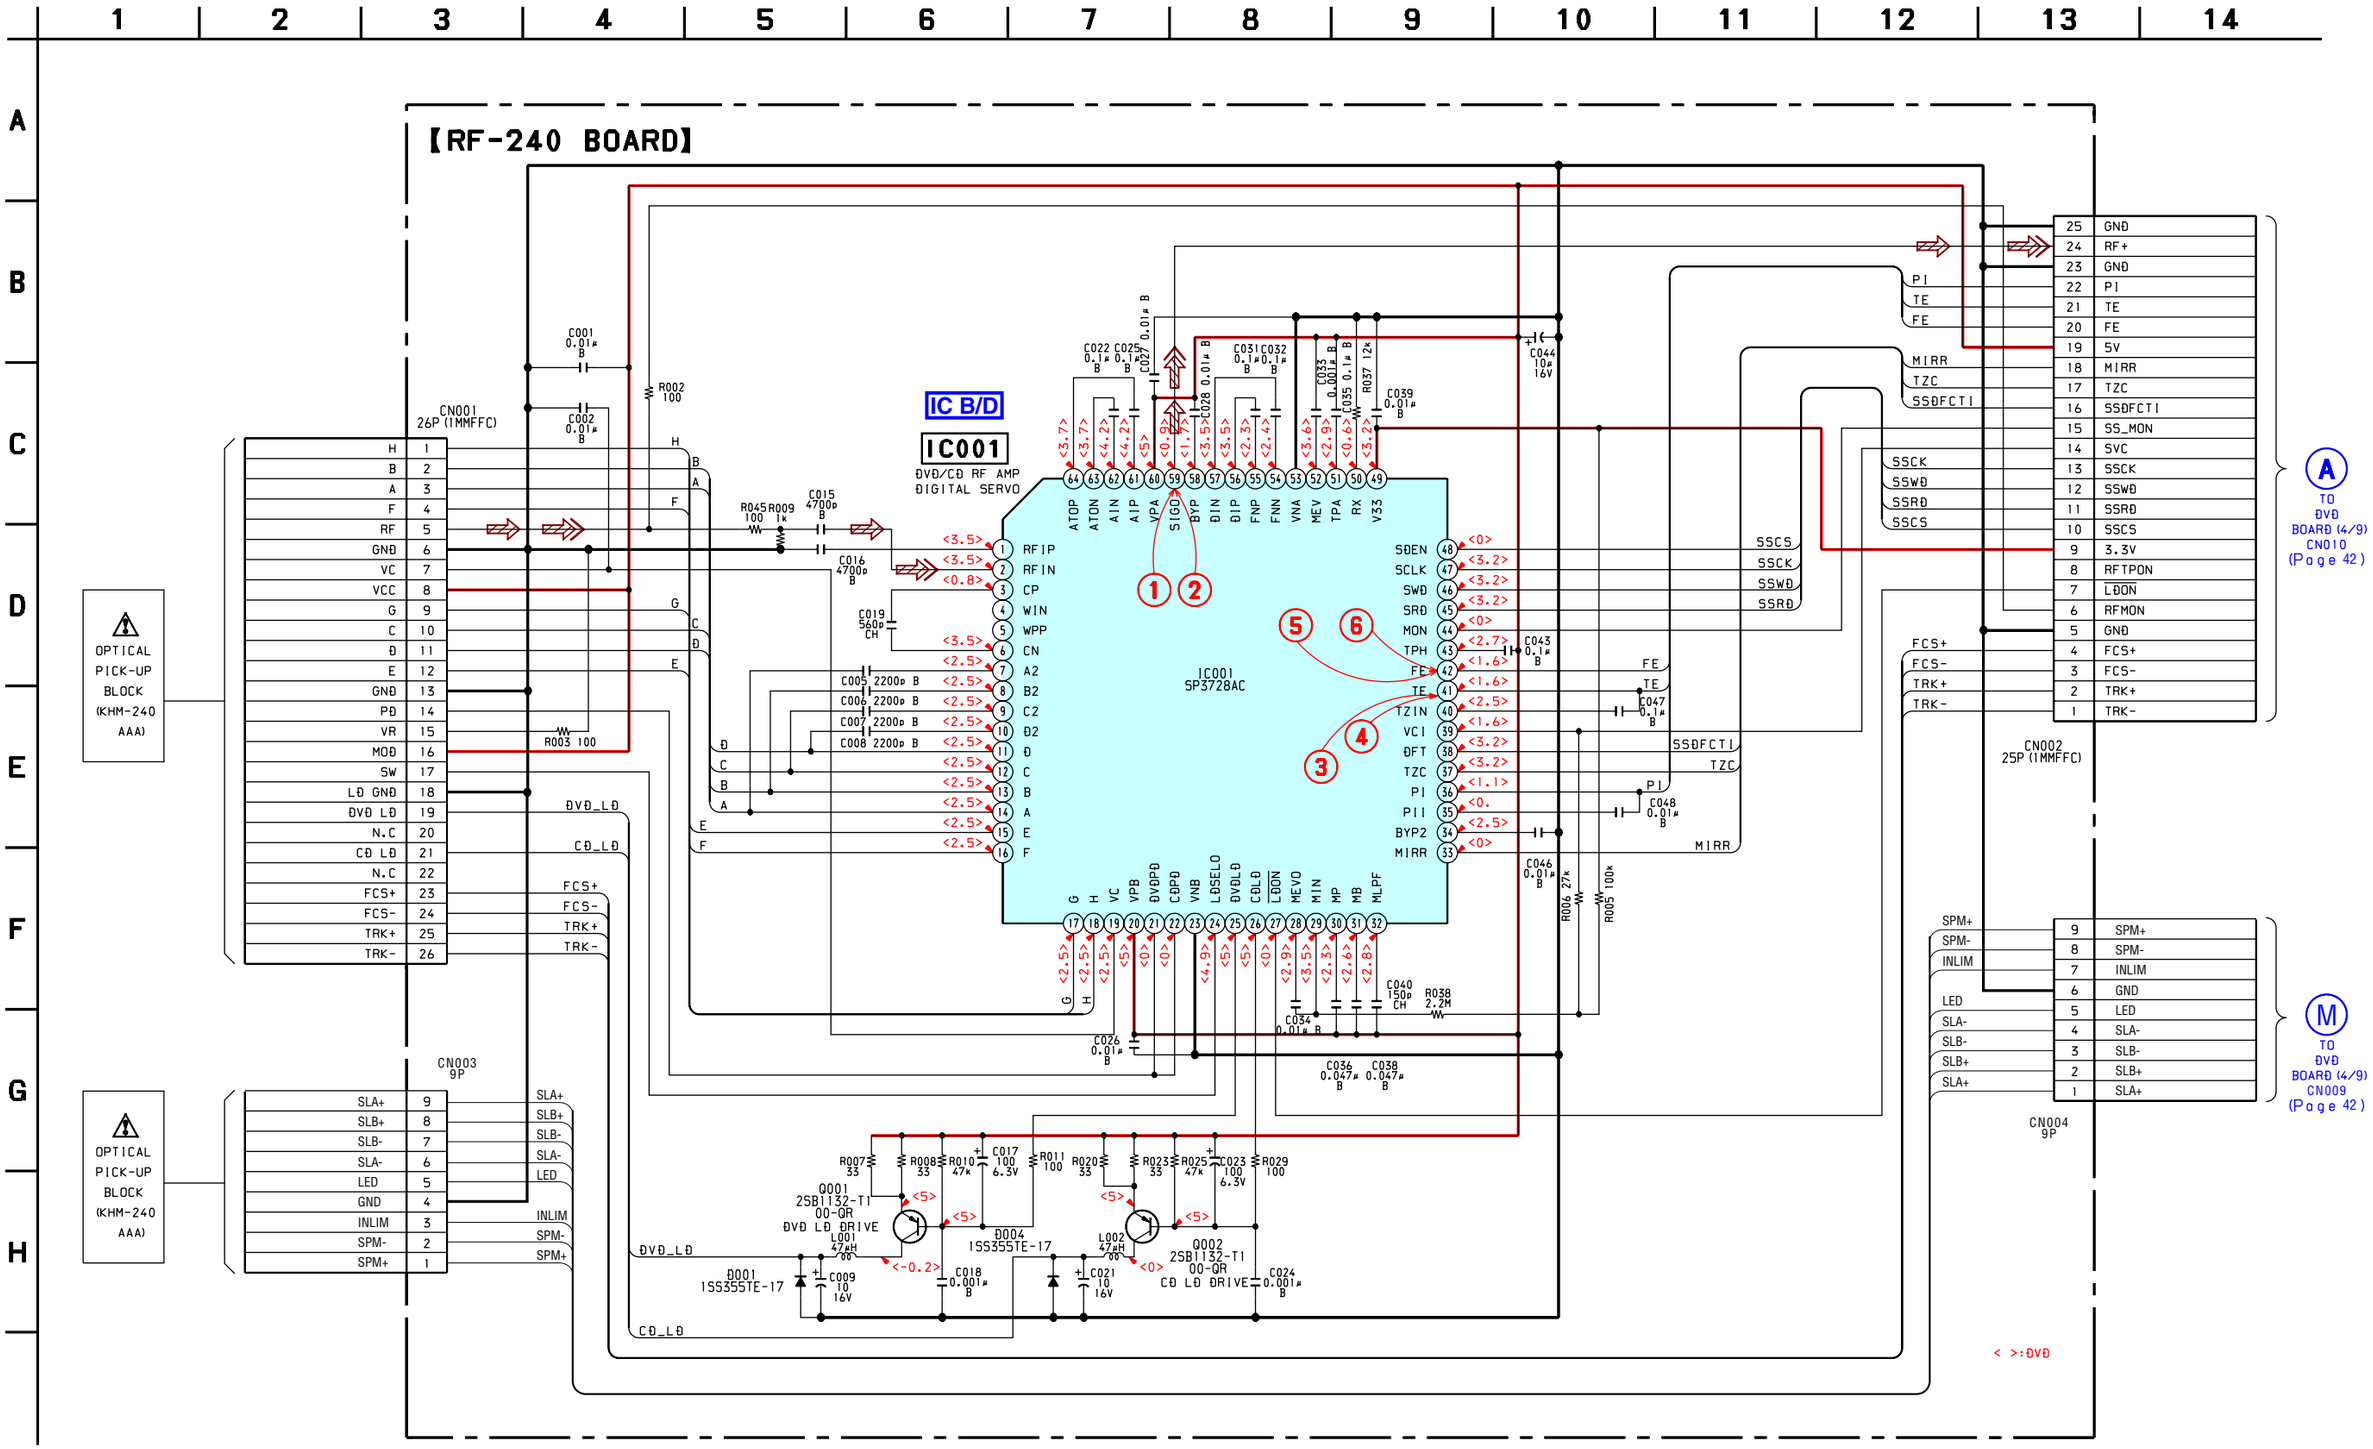

5-4. PRINTED WIRING BOARD – DVD SECTION (SIDE A) – • See page 30 for Circuit Boards Location.

【ĐVĐ BOARĐ】(SIĐE A)

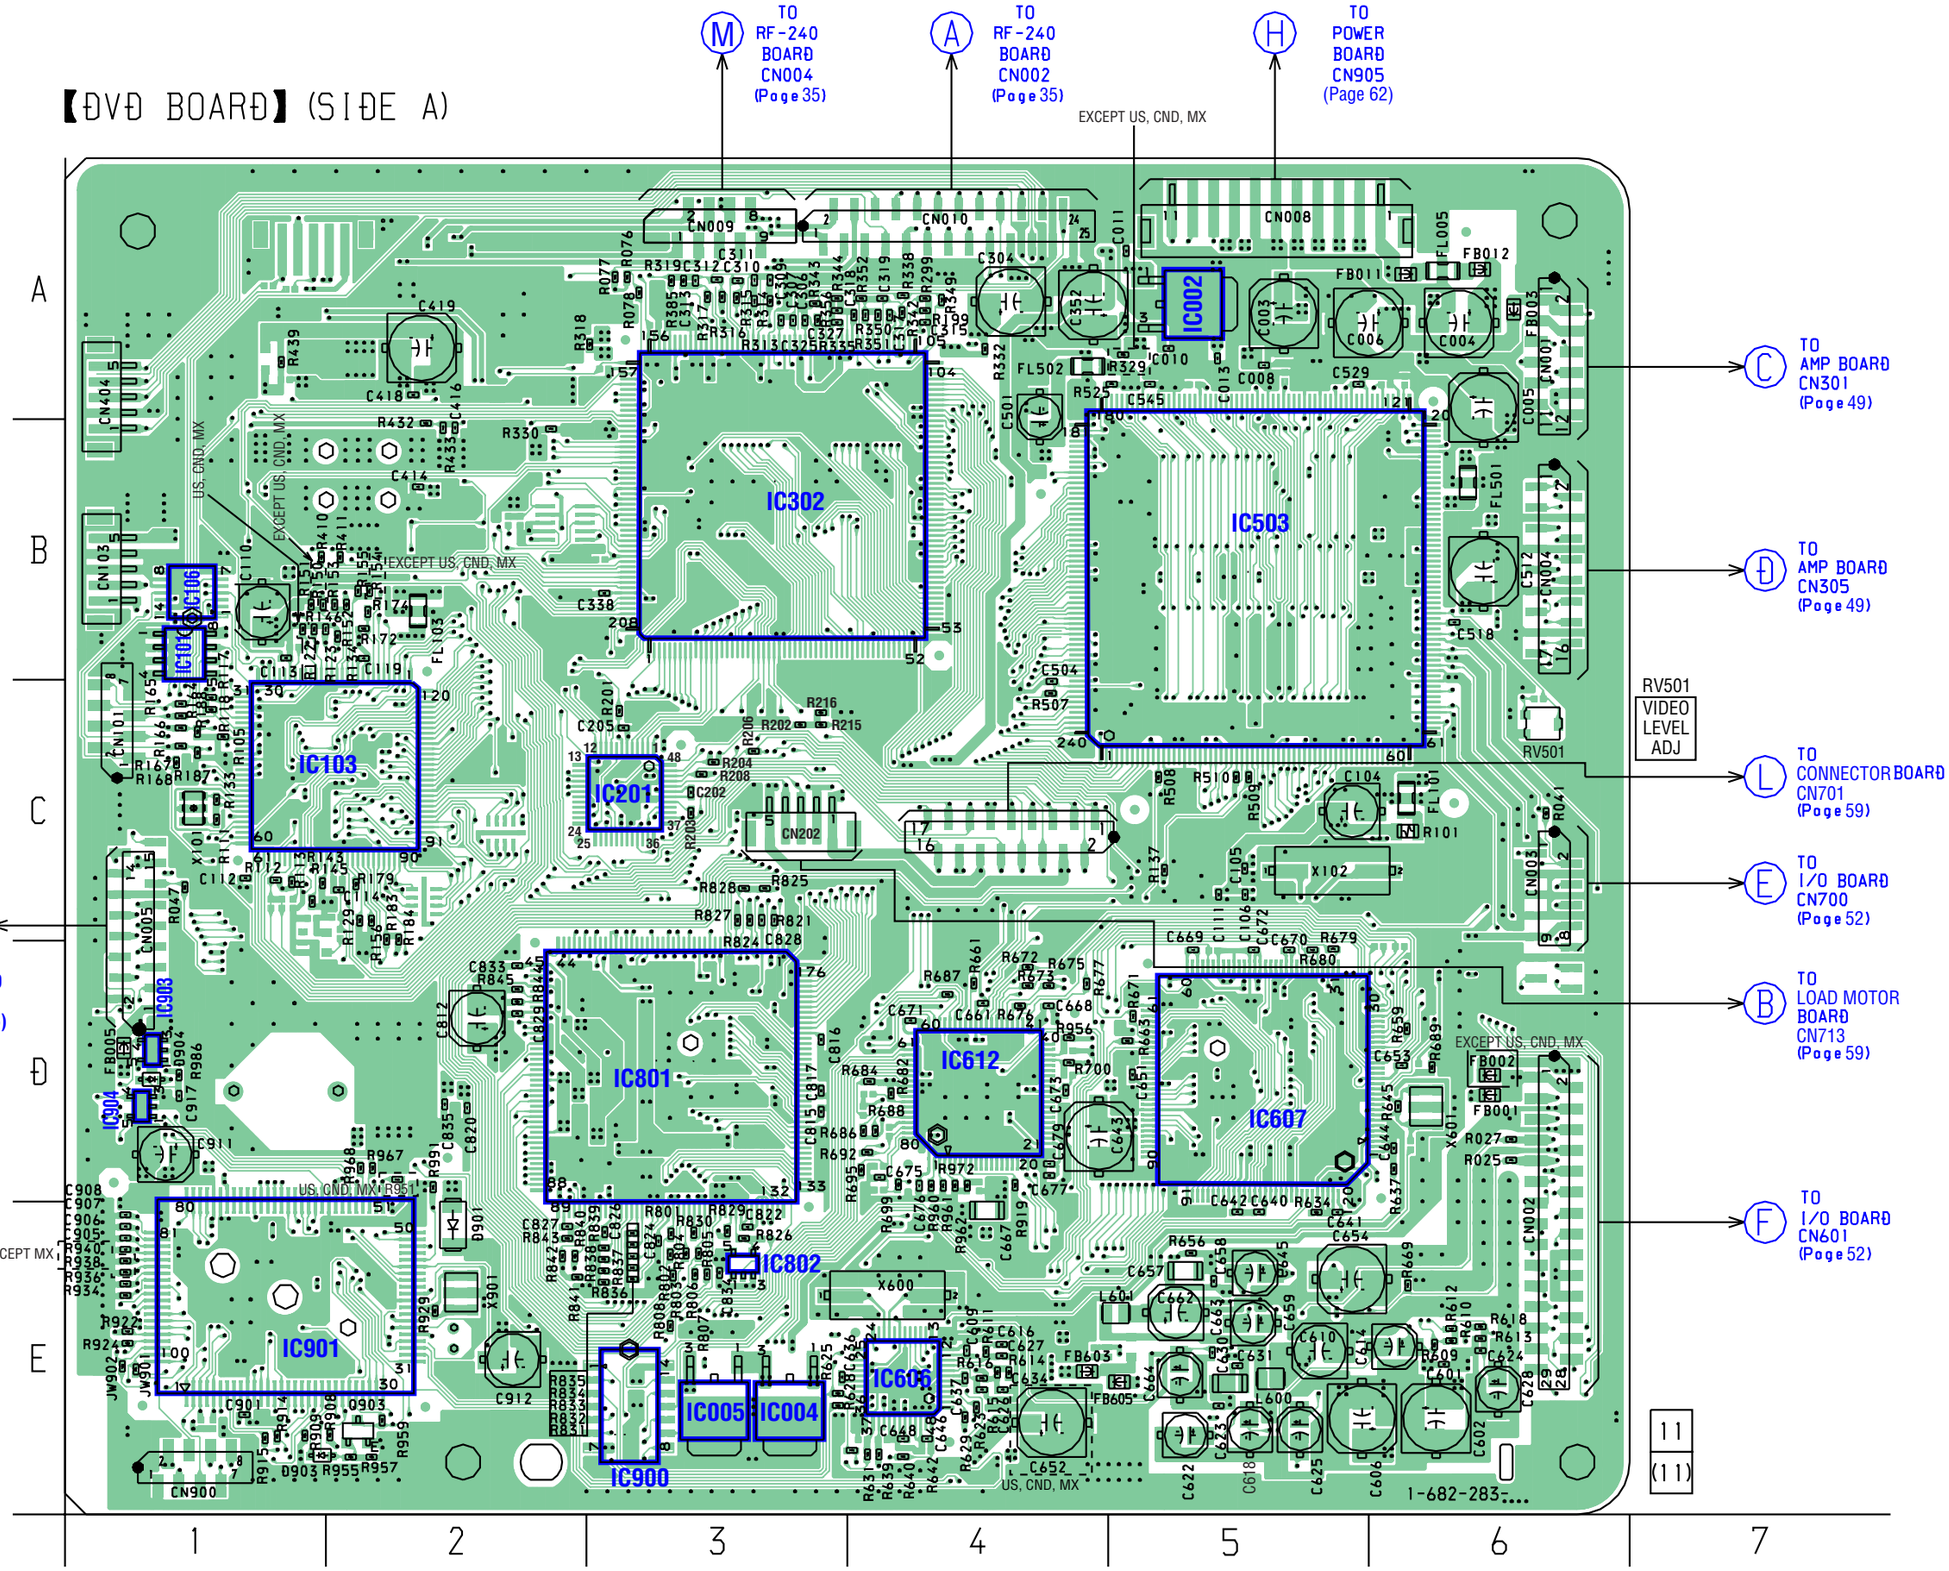

• **Semiconductor Location**

Ref. No.	Location
D901	E-2
D903	E-1
D904	D-1
IC002	A-5
IC004	E-3
IC005	E-3
IC101	B-1
IC103	C-2
IC106	B-1
IC201	C-3
IC302	B-3
IC503	B-5
IC606	E-4
IC607	D-5
IC612	D-4
IC801	D-3
IC802	E-3
IC900	E-3
IC901	E-2
IC903	D-1
IC904	D-1
Q903	E-2

5-5. PRINTED WIRING BOARD – DVD (SIDE B) SECTION – • See page 30 for Circuit Boards Location.

【ÐVÐ BOARÐ】(SIÐE B)

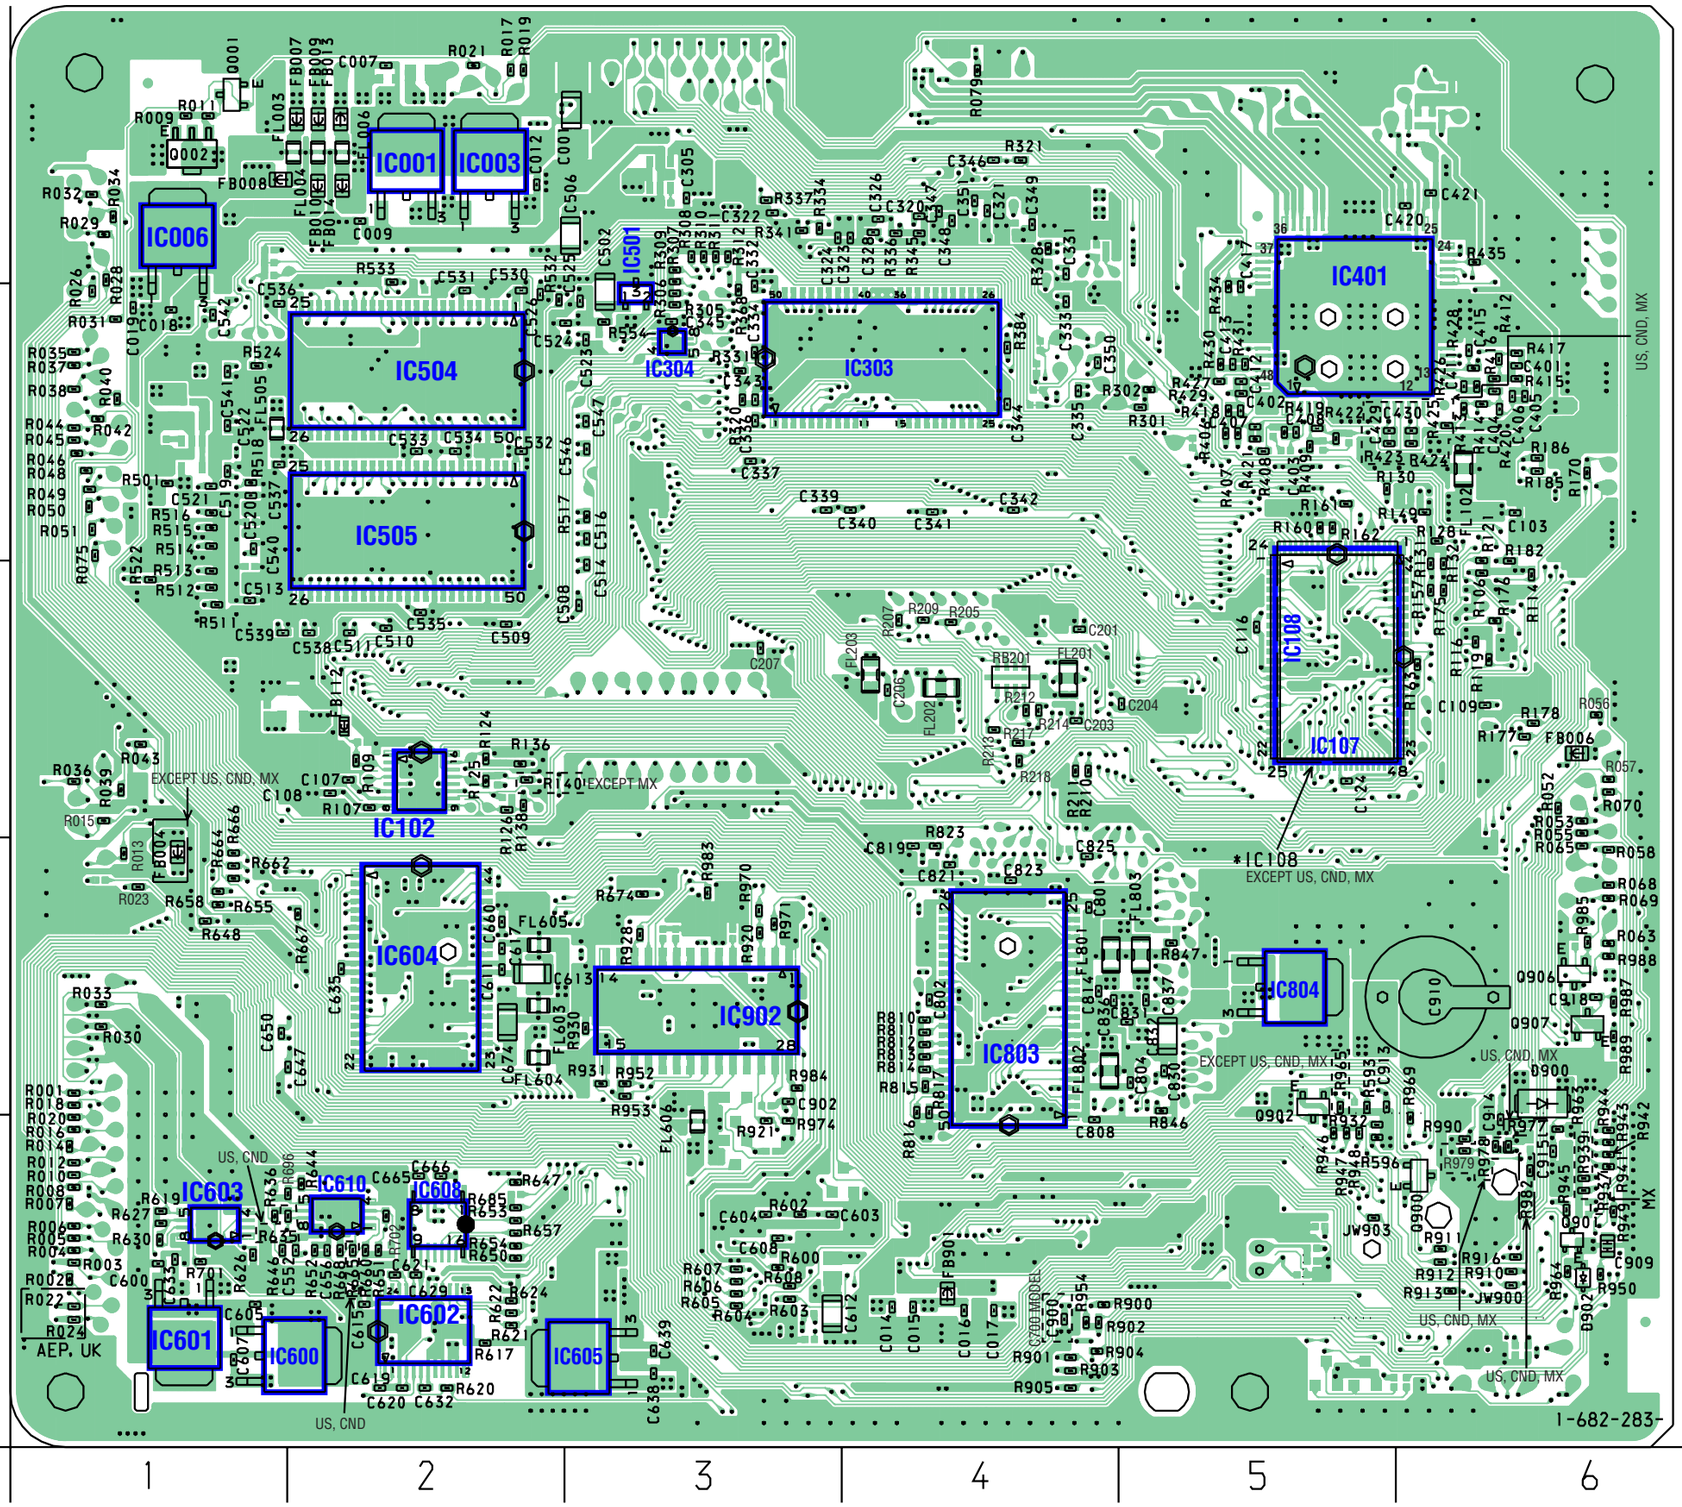

• **Semiconductor Location**

Ref. No.	Location
D900	D-6
D902	E-6
IC001	A-2
IC003	A-2
IC006	A-1
IC102	C-2
IC107	C-5
IC108	C-5
IC303	B-4
IC304	B-3
IC401	B-5
IC501	B-3
IC504	B-2
IC505	B-2
IC600	E-1
IC601	E-1
IC602	E-2
IC603	E-1
IC604	D-2
IC605	E-3
IC608	E-2
IC610	E-2
IC803	D-4
IC804	D-5
IC902	D-3
Q001	A-1
Q002	A-1
Q900	E-6
Q901	E-6
Q902	D-5
Q906	D-6
Q907	D-6

5-6. SCHEMATIC DIAGRAM – DVD SECTION (1/9) – • See page 31 for Waveforms. • See page 64 for IC Block Diagrams.

【DVD BOARD】(1/9)

IC606 DIGITAL AUDIO I/F RECEIVER IC606 LC89056W IC B/D

IC612 DIGITAL AUDIO PROCESSOR IC612 CXD9633Q

IC604 SRAM IC604 1561LV6416-15T

IC607 AUDIO DSP IC607 CXD9617R

FL605 FL606 FL603 FL604

X601 13.5MHz X600 12.288MHz

US, CND, MX

*1 C643
47/6.3V: EXCEPT US, CND, MX
220/4V : C700 / US, CND, MX
0.22/50V: C900

No mark: FM
< >: DVD

CN001 12P (1MMFFC)

TO DVD BOARD (3/9) (Page 41)

TO DVD BOARD (4/9) (Page 42)

TO DVD BOARD (2/9) (Page 40)

TO DVD BOARD (5/9) (Page 43)

TO DVD BOARD (2/9) (Page 40)

TO DVD BOARD (4/9) (Page 42)

TO AMP BOARD (1/2) CN301 (Page 50)

5-7. SCHEMATIC DIAGRAM – DVD SECTION (2/9) –

• See page 31 for Wavefoms. • See page 64 for IC Block Diagrams.

【 DVD BOARD 】(2/9)

IC600 5V REG
IC601 10V REG
IC602 AUDIO A/D CONV
IC603 AMP
IC605 2.5V REG
IC608 AUDIO D/A CONV
IC610 AMP
IC900 BUFFER
IC901 CPU
IC902 SERIAL → PARALLEL
IC903 RESET
IC904 RESET

5-8. SCHEMATIC DIAGRAM – DVD SECTION (3/9) –

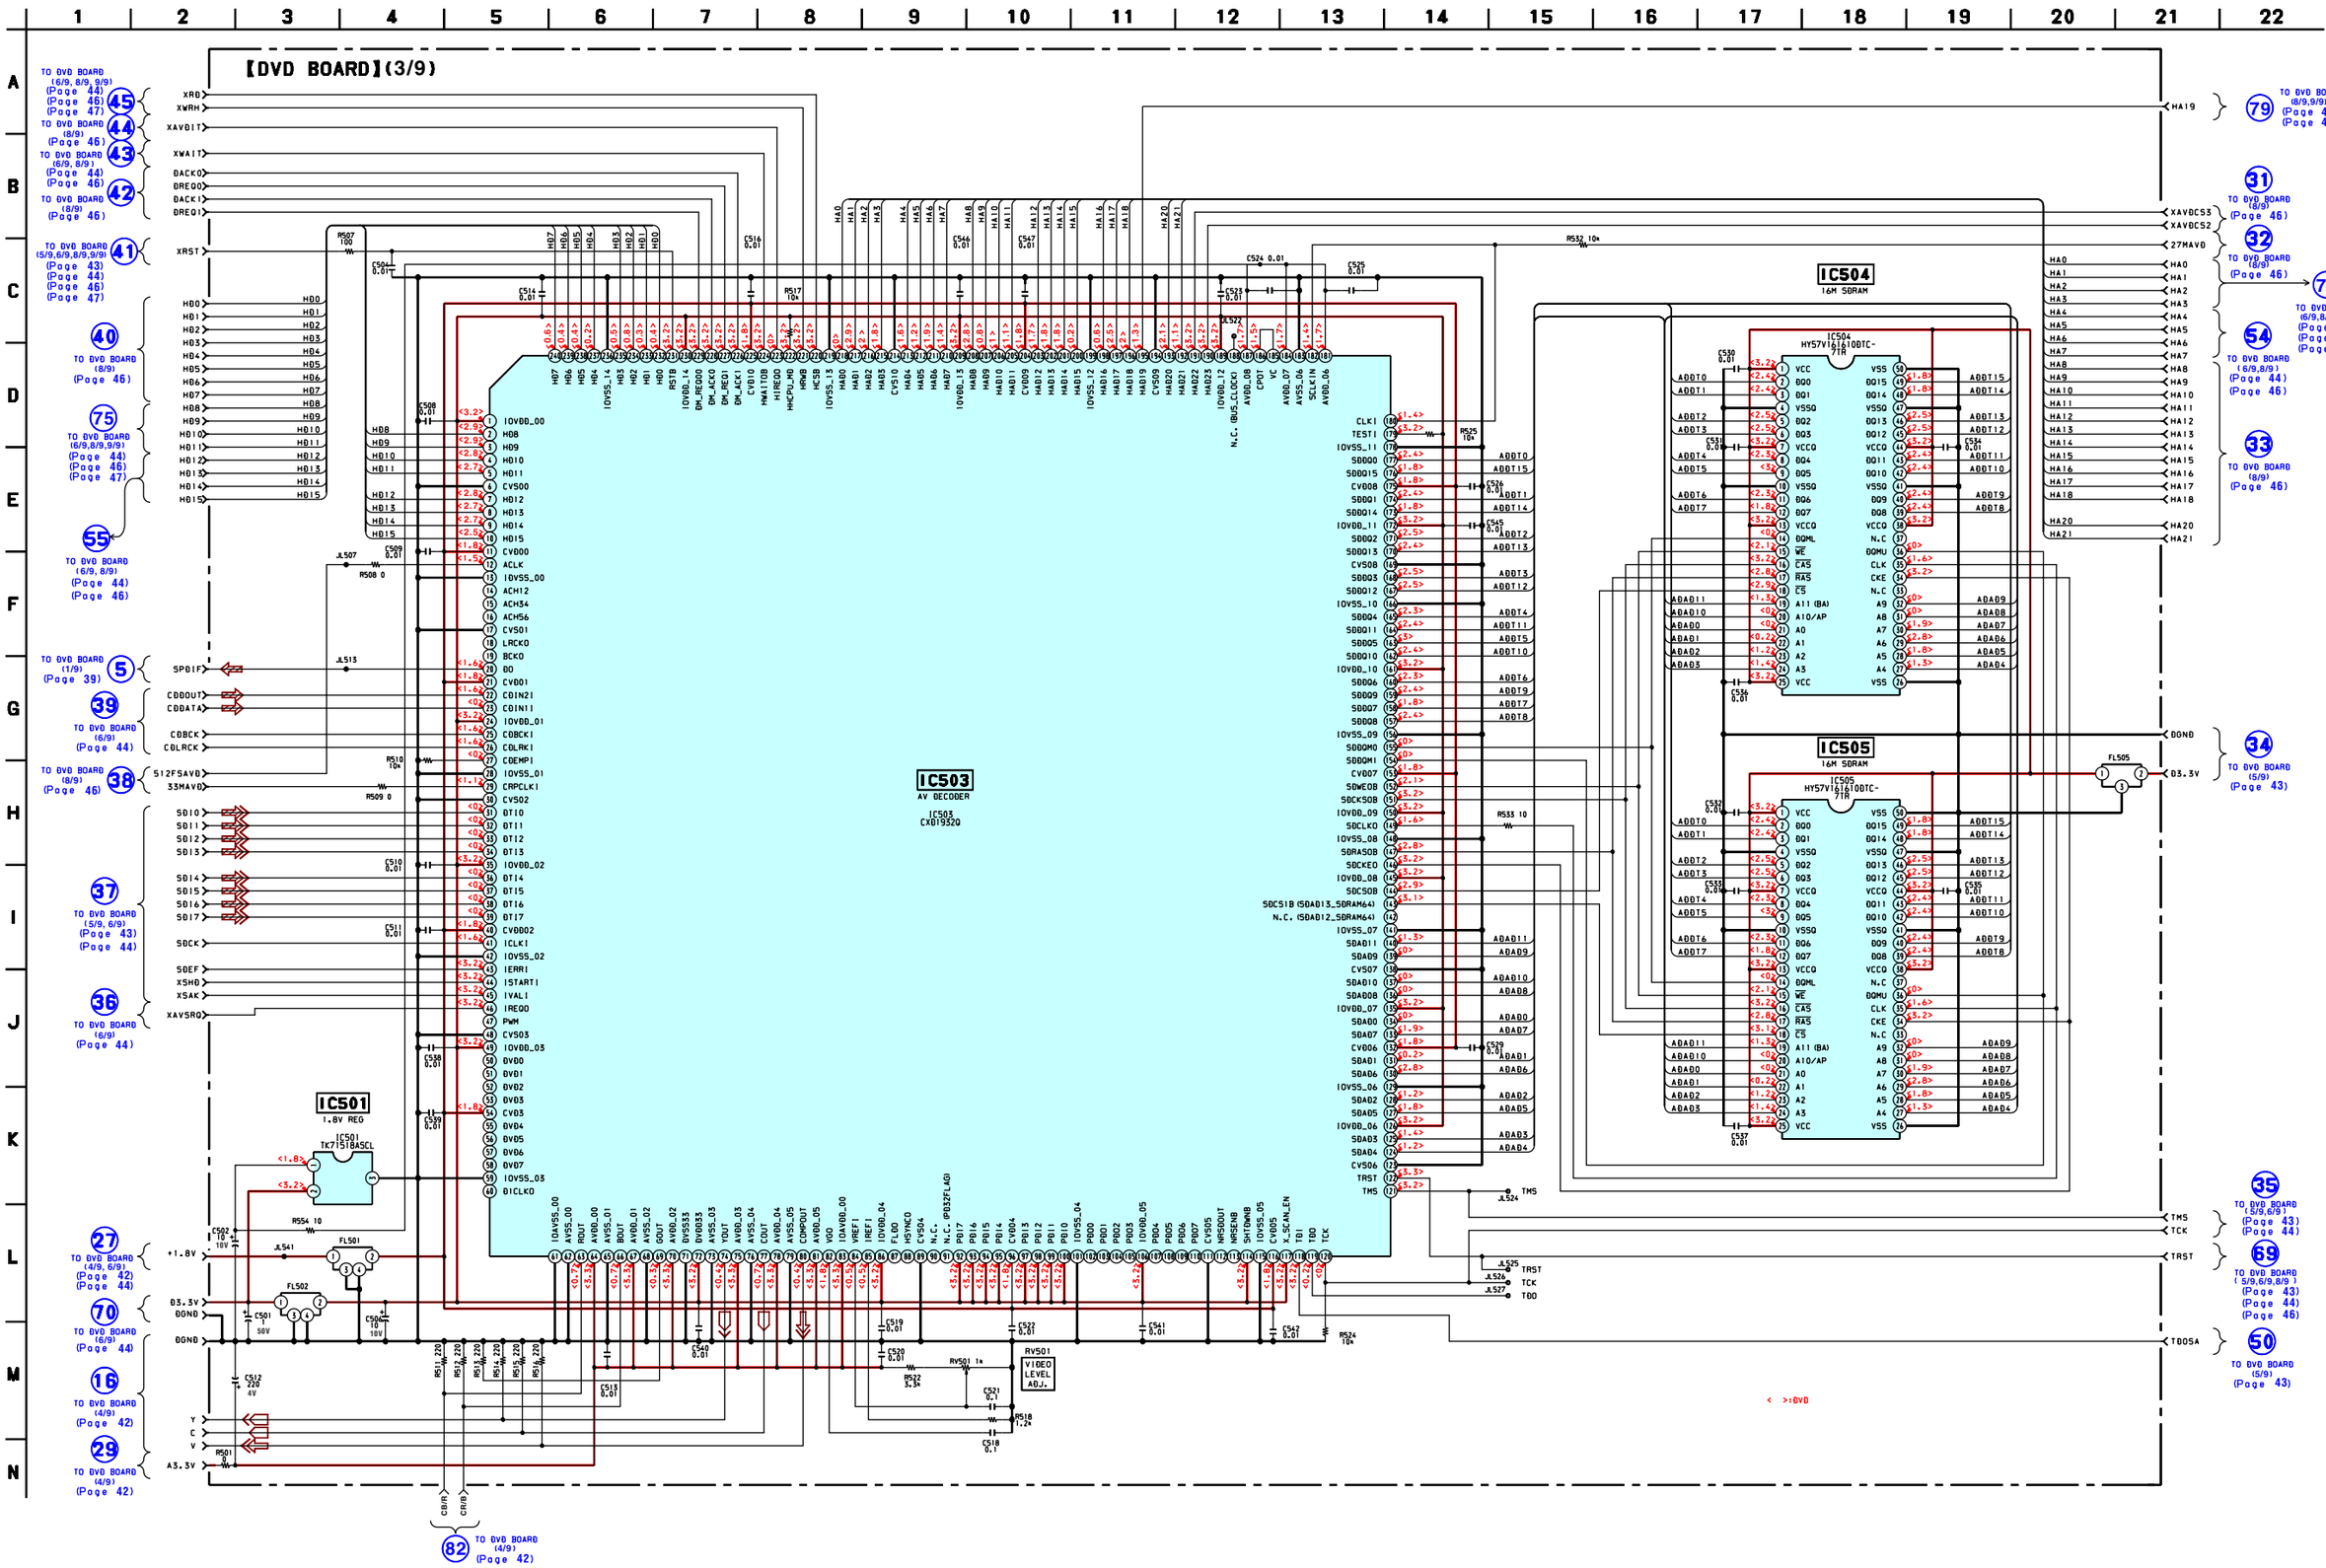
【DVD BOARD】(3/9)
IC503
AV DECODER
IC503
CXD1952Q
IC504
16M SDRAM
HY57V161610DTC-7IR
IC505
16M SDRAM
HY57V161610DTC-7IR
IC501
1.8V REG
IC501
TK71518ASCL
RV501
VIDEO LEVEL ADJ.
FL501
FL502
FL505
TO DVD BOARD (6/9, 8/9, 9/9) (Page 44) (Page 46) (Page 47)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (6/9, 8/9) (Page 44) (Page 46)
TO DVD BOARD (5/9,6/9,8/9,9/9) (Page 43) (Page 44) (Page 46) (Page 47)
TO DVD BOARD (6/9,8/9,9/9) (Page 44) (Page 46) (Page 47)
TO DVD BOARD (6/9, 8/9) (Page 44) (Page 46)
TO DVD BOARD (1/9) (Page 39)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (5/9, 6/9) (Page 43) (Page 44)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (4/9, 6/9) (Page 42) (Page 44)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (8/9,9/9) (Page 46) (Page 47)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (6/9,8/9) (Page 44) (Page 46)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (5/9,6/9) (Page 43) (Page 44)
TO DVD BOARD (5/9,6/9,8/9) (Page 43) (Page 44) (Page 46)
TO DVD BOARD (5/9) (Page 43)
TO DVD BOARD (5/9) (Page 43)
< >:DVD

5-9. SCHEMATIC DIAGRAM – DVD SECTION (4/9) –

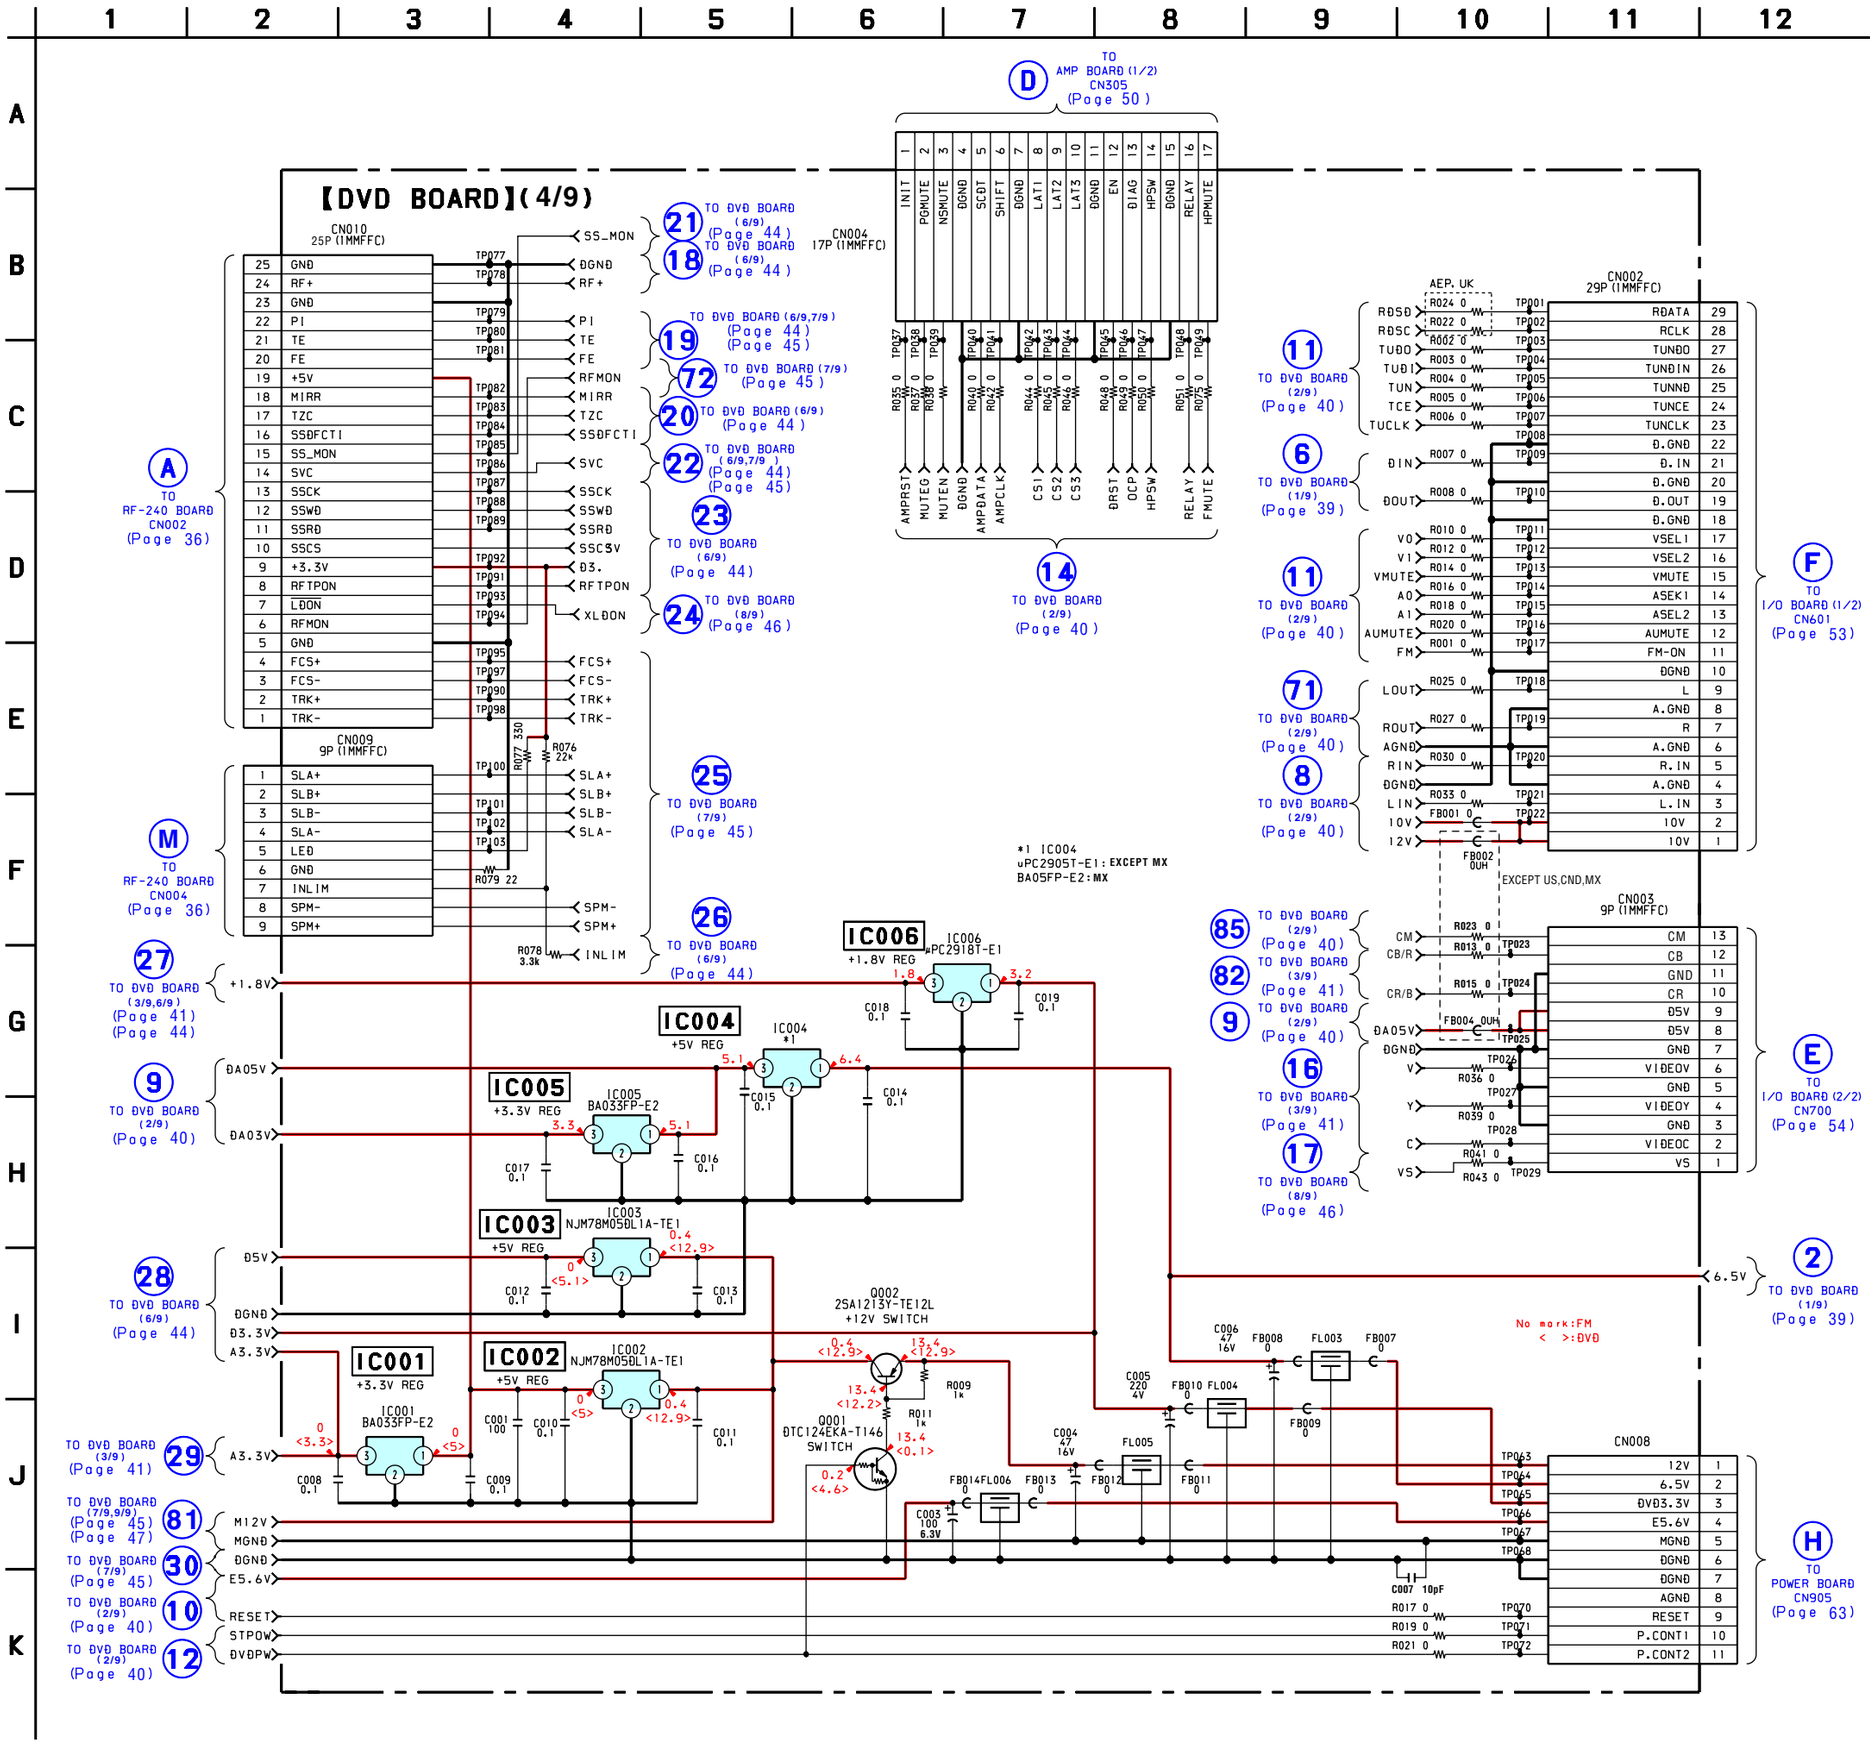
【DVD BOARD】(4/9)
CN010 25P (1MMFFC)
CN004 17P (1MMFFC)
CN009 9P (1MMFFC)
CN002 29P (1MMFFC)
CN003 9P (1MMFFC)
CN008
TO AMP BOARD (1/2) CN305 (Page 50)
TO RF-240 BOARD CN002 (Page 36)
TO RF-240 BOARD CN004 (Page 36)
TO DVD BOARD (2/9) (Page 40)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (6/9,7/9) (Page 44) (Page 45)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (3/9,6/9) (Page 41) (Page 44)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (7/9,9/9) (Page 45) (Page 47)
TO DVD BOARD (2/9) (Page 40)
TO DVD BOARD (1/9) (Page 39)
TO I/O BOARD (1/2) CN601 (Page 53)
TO I/O BOARD (2/2) CN700 (Page 54)
TO POWER BOARD CN905 (Page 63)
*1 IC004
µPC2905T-E1: EXCEPT MX
BA05FP-E2: MX
IC001 BA033FP-E2 +3.3V REG
IC002 NJM78M05DL1A-TE1 +5V REG
IC003 NJM78M05DL1A-TE1 +5V REG
IC004 *1 +5V REG
IC005 BA033FP-E2 +3.3V REG
IC006 µPC2918T-E1 +1.8V REG
Q001 DTC124EKA-T146 SWITCH
Q002 2SA1213Y-TE12L +12V SWITCH
AEP, UK
No mark:FM
< >:DVD
EXCEPT US,CND,MX

5-10. SCHEMATIC DIAGRAM – DVD SECTION (5/9) –

• See page 74 for IC Pin Function Description.

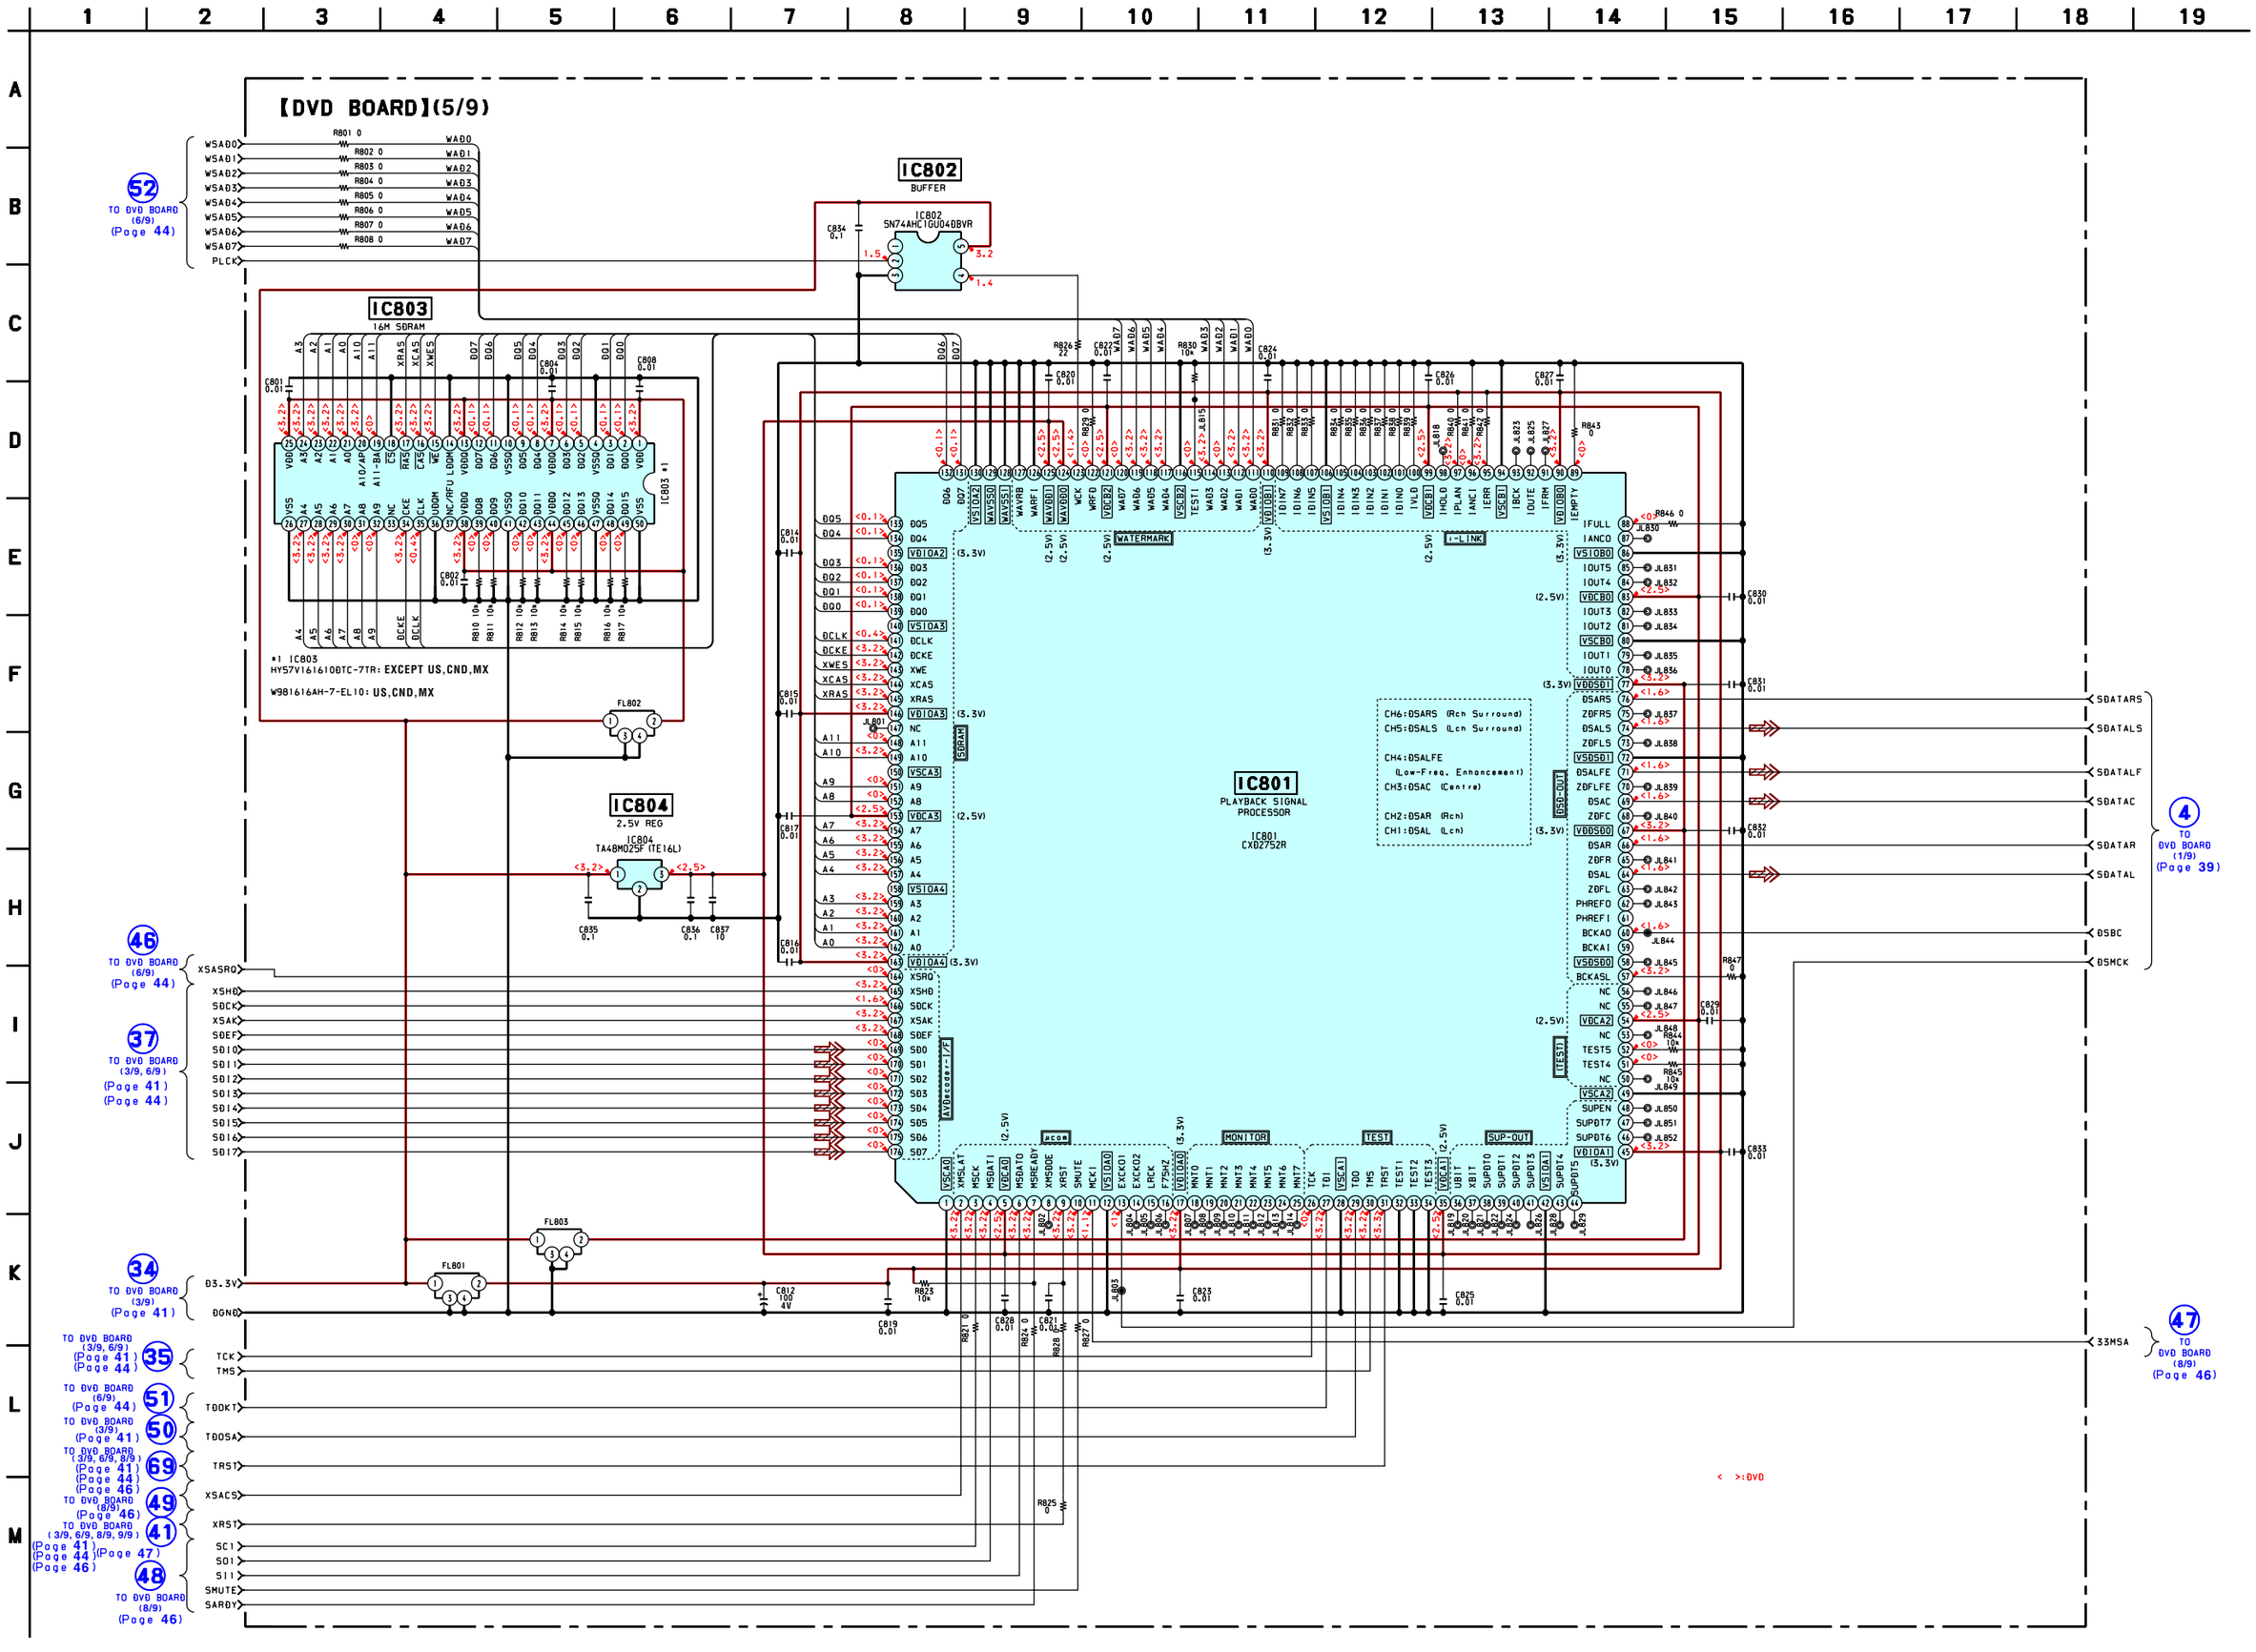

5-11. SCHEMATIC DIAGRAM – DVD SECTION (6/9) – • See page 69 for IC Pin Function Description.

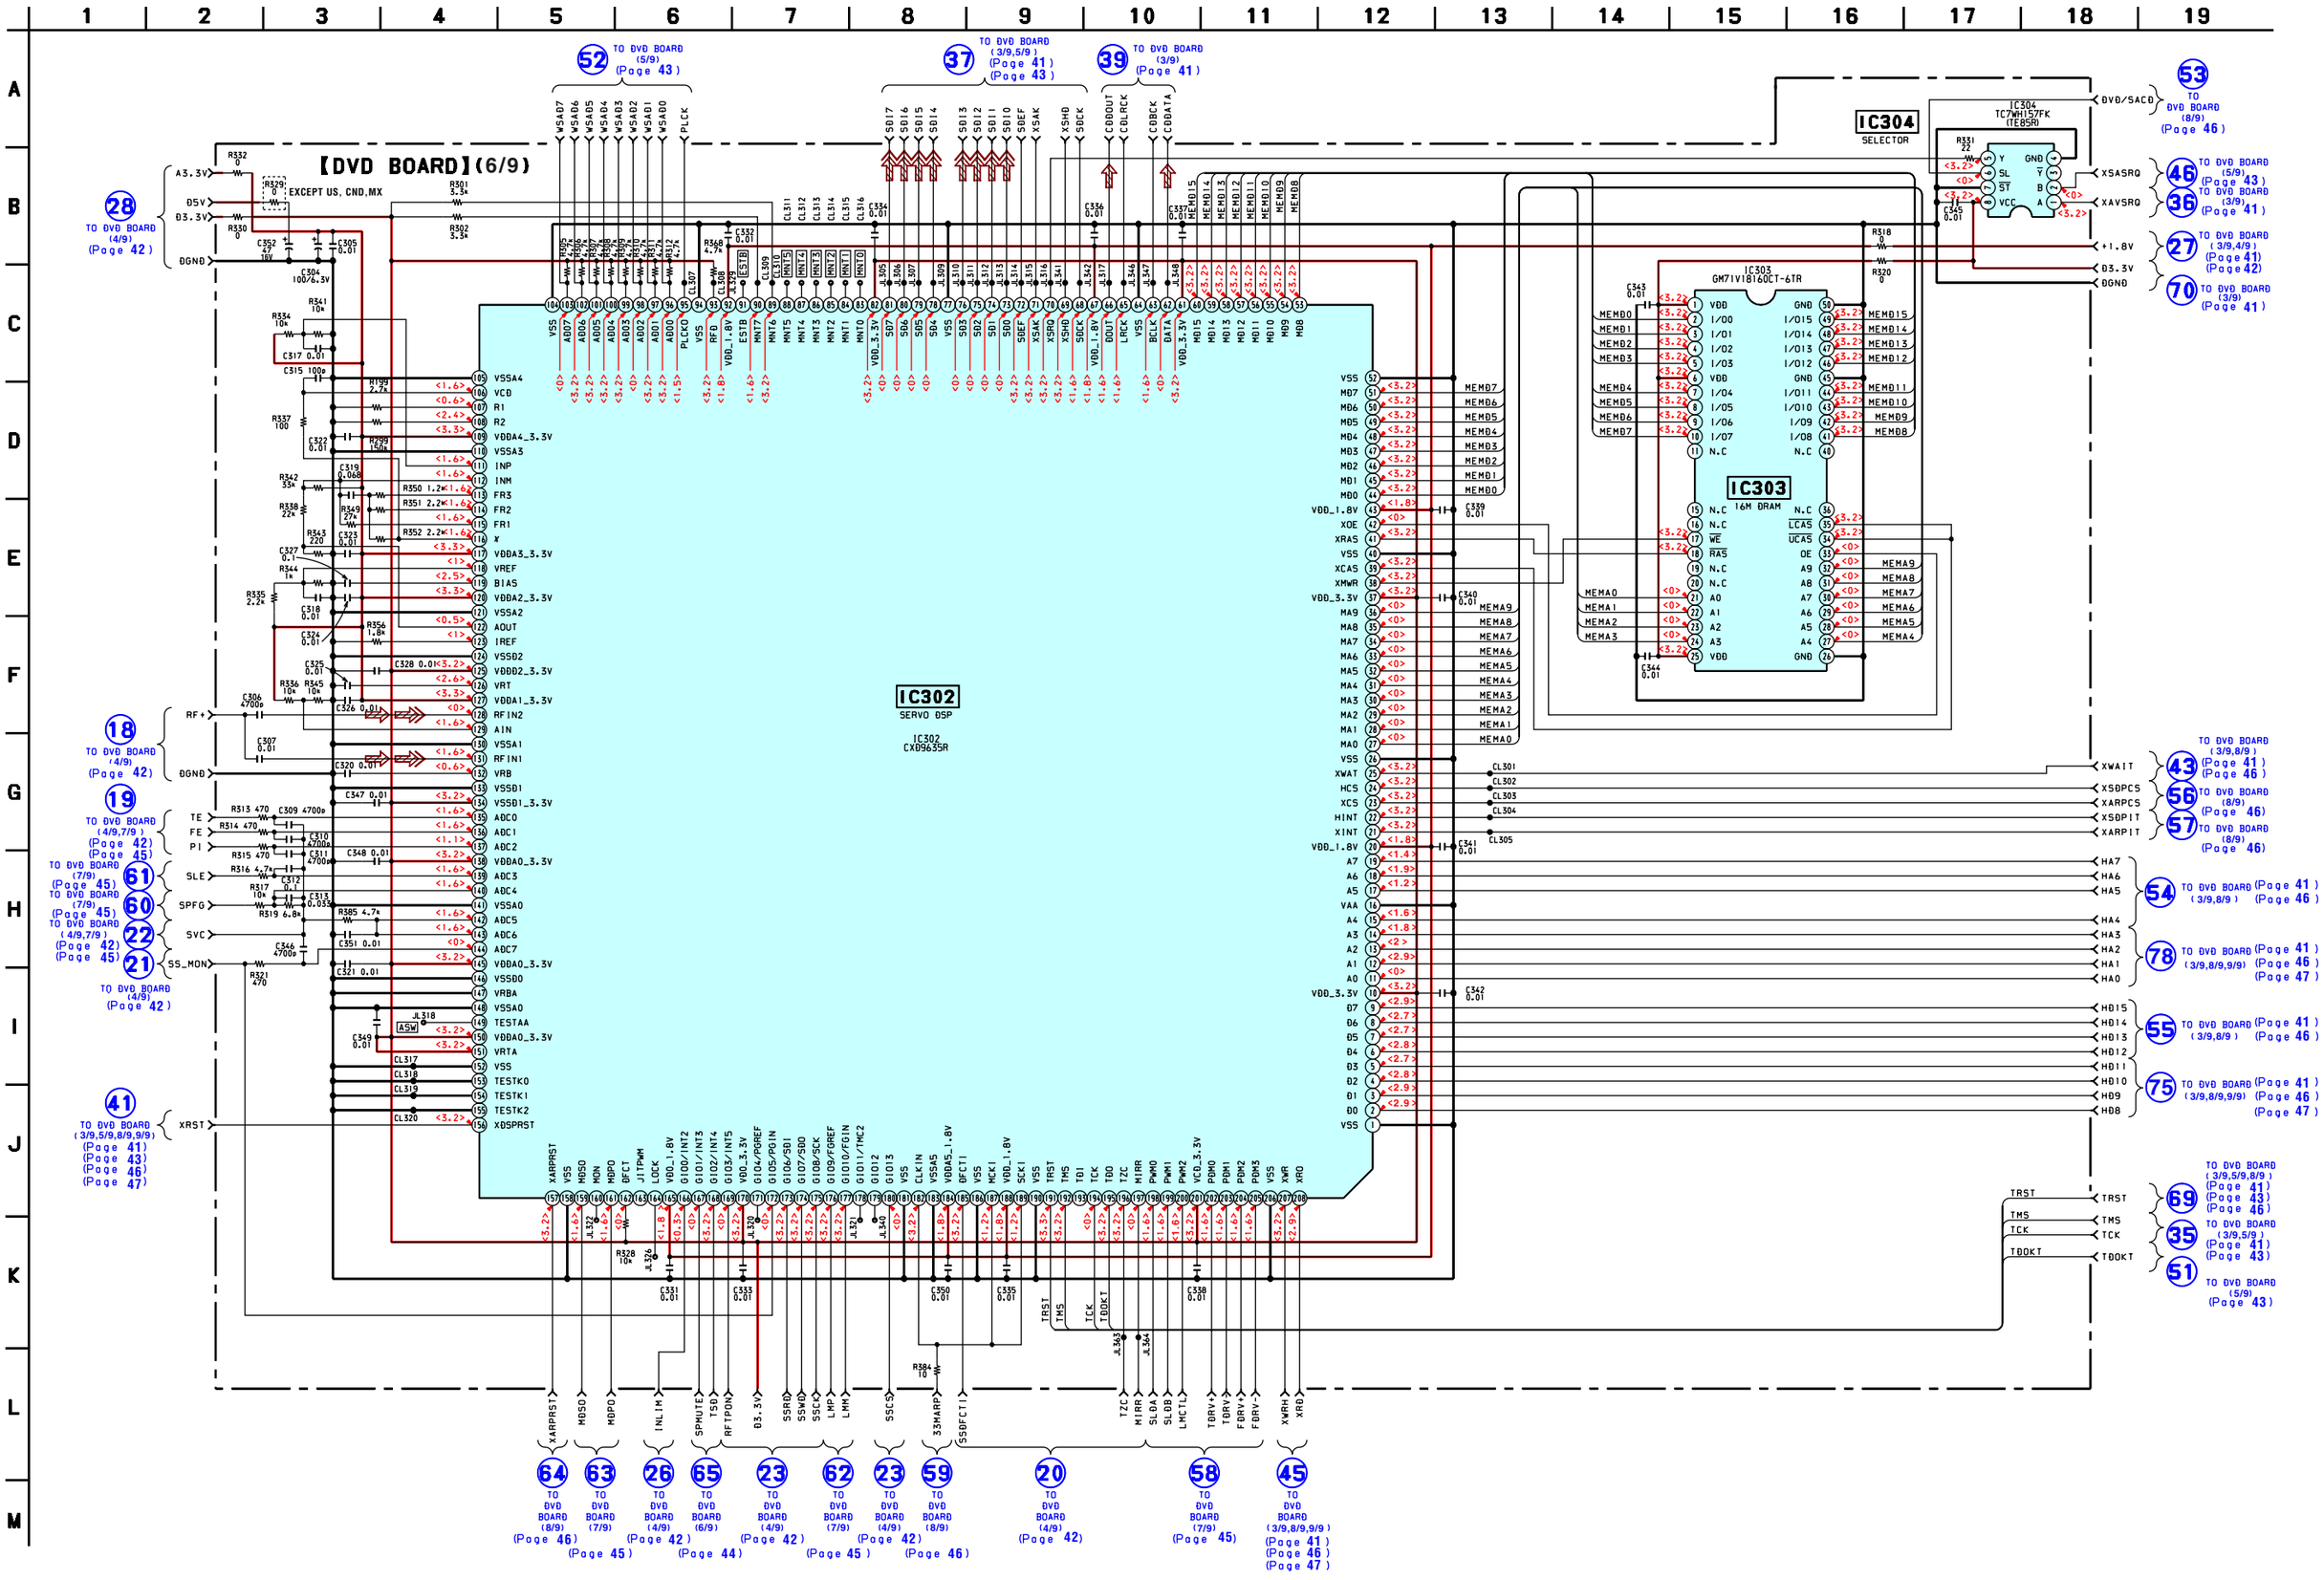
【DVD BOARD】(6/9)
IC302
SERVO DSP
IC302
CXD9655R
IC303
GM71V18160CT-6TR
16M DRAM
IC304
TC7WH157FK
(TE85R)
SELECTOR
EXCEPT US, CND,MX
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9,7/9) (Page 42) (Page 45)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (4/9,7/9) (Page 42) (Page 45)
TO DVD BOARD (3/9,5/9,8/9,9/9) (Page 41) (Page 43) (Page 46) (Page 47)
TO DVD BOARD (5/9) (Page 43)
TO DVD BOARD (3/9,5/9) (Page 41) (Page 43)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (3/9,8/9) (Page 41) (Page 46)
TO DVD BOARD (3/9,4/9) (Page 41) (Page 42)
TO DVD BOARD (3/9,8/9,9/9) (Page 41) (Page 46) (Page 47)
TO DVD BOARD (3/9,8/9) (Page 41) (Page 46)
TO DVD BOARD (3/9,5/9,8/9) (Page 41) (Page 43) (Page 46)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (5/9) (Page 43)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (3/9,8/9,9/9) (Page 41) (Page 46) (Page 47)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 45)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (8/9) (Page 46)
TO DVD BOARD (3/9,8/9,9/9) (Page 41) (Page 46) (Page 47)

5-12. SCHEMATIC DIAGRAM – DVD SECTION (7/9) –

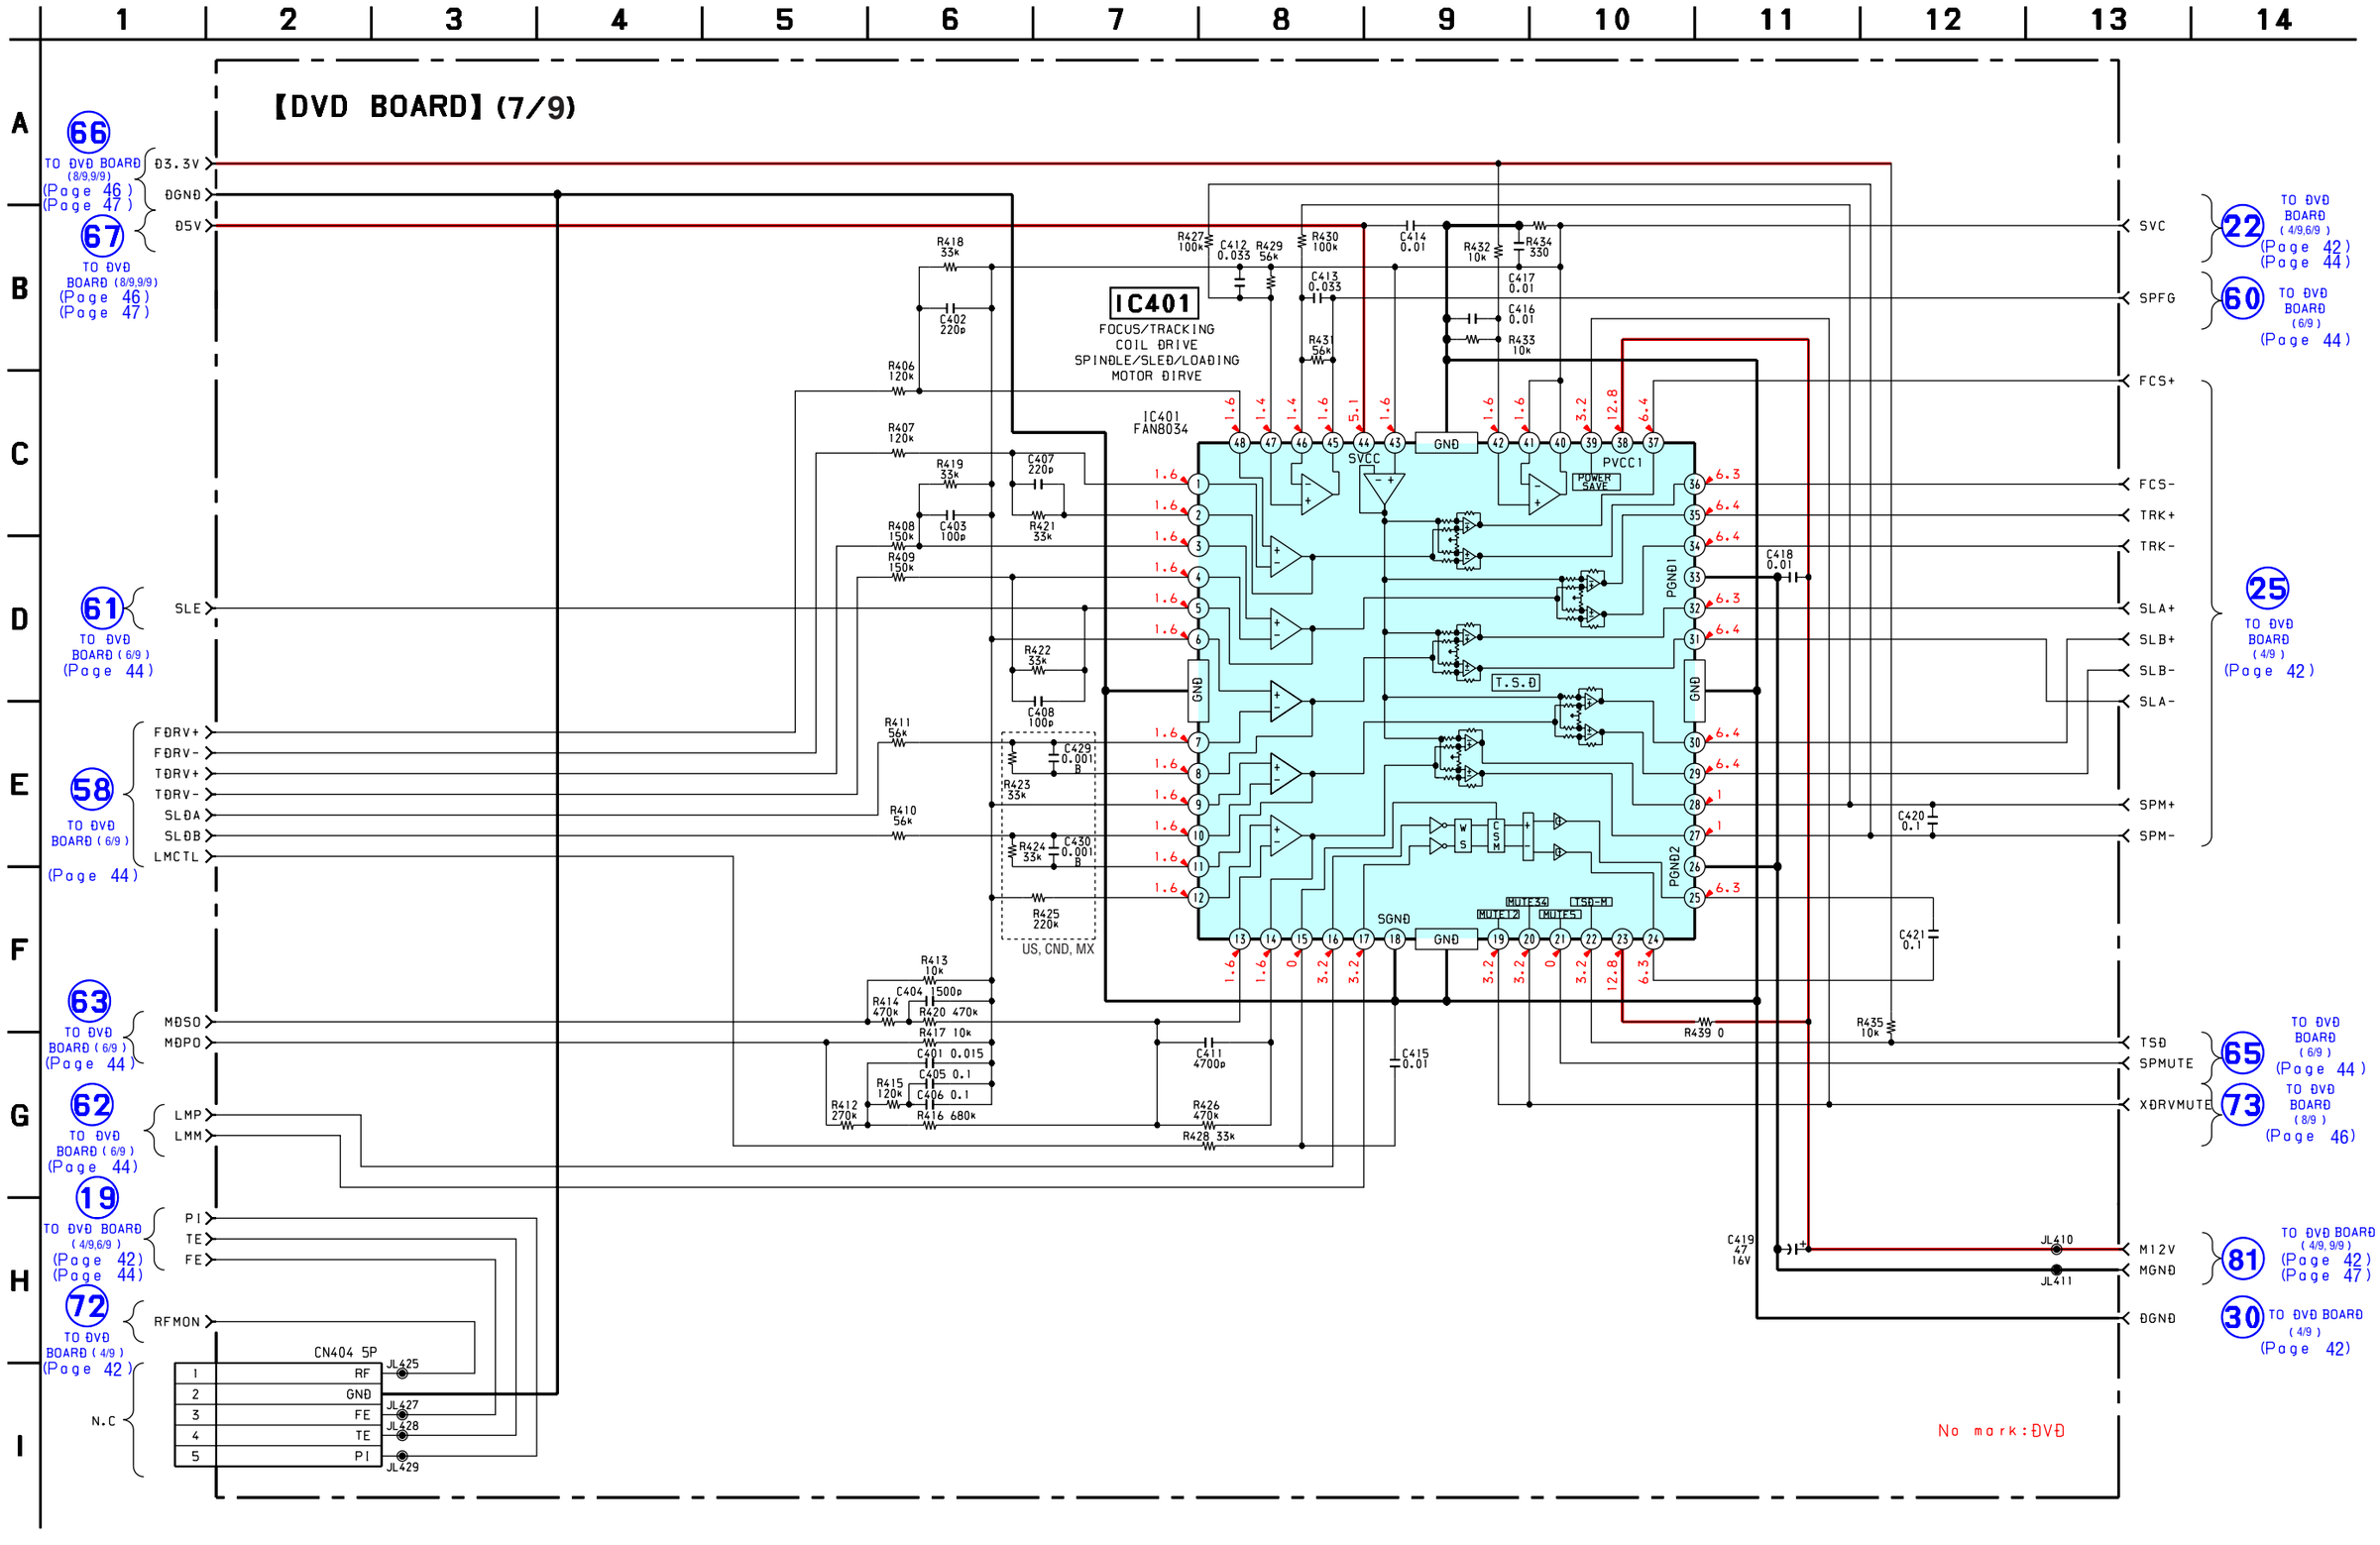

5-13. SCHEMATIC DIAGRAM – DVD SECTION (8/9) –

• See page 31 for Waveforms. • See page 64 for IC Block Diagrams. • See page 67 for IC Pin Function Description.

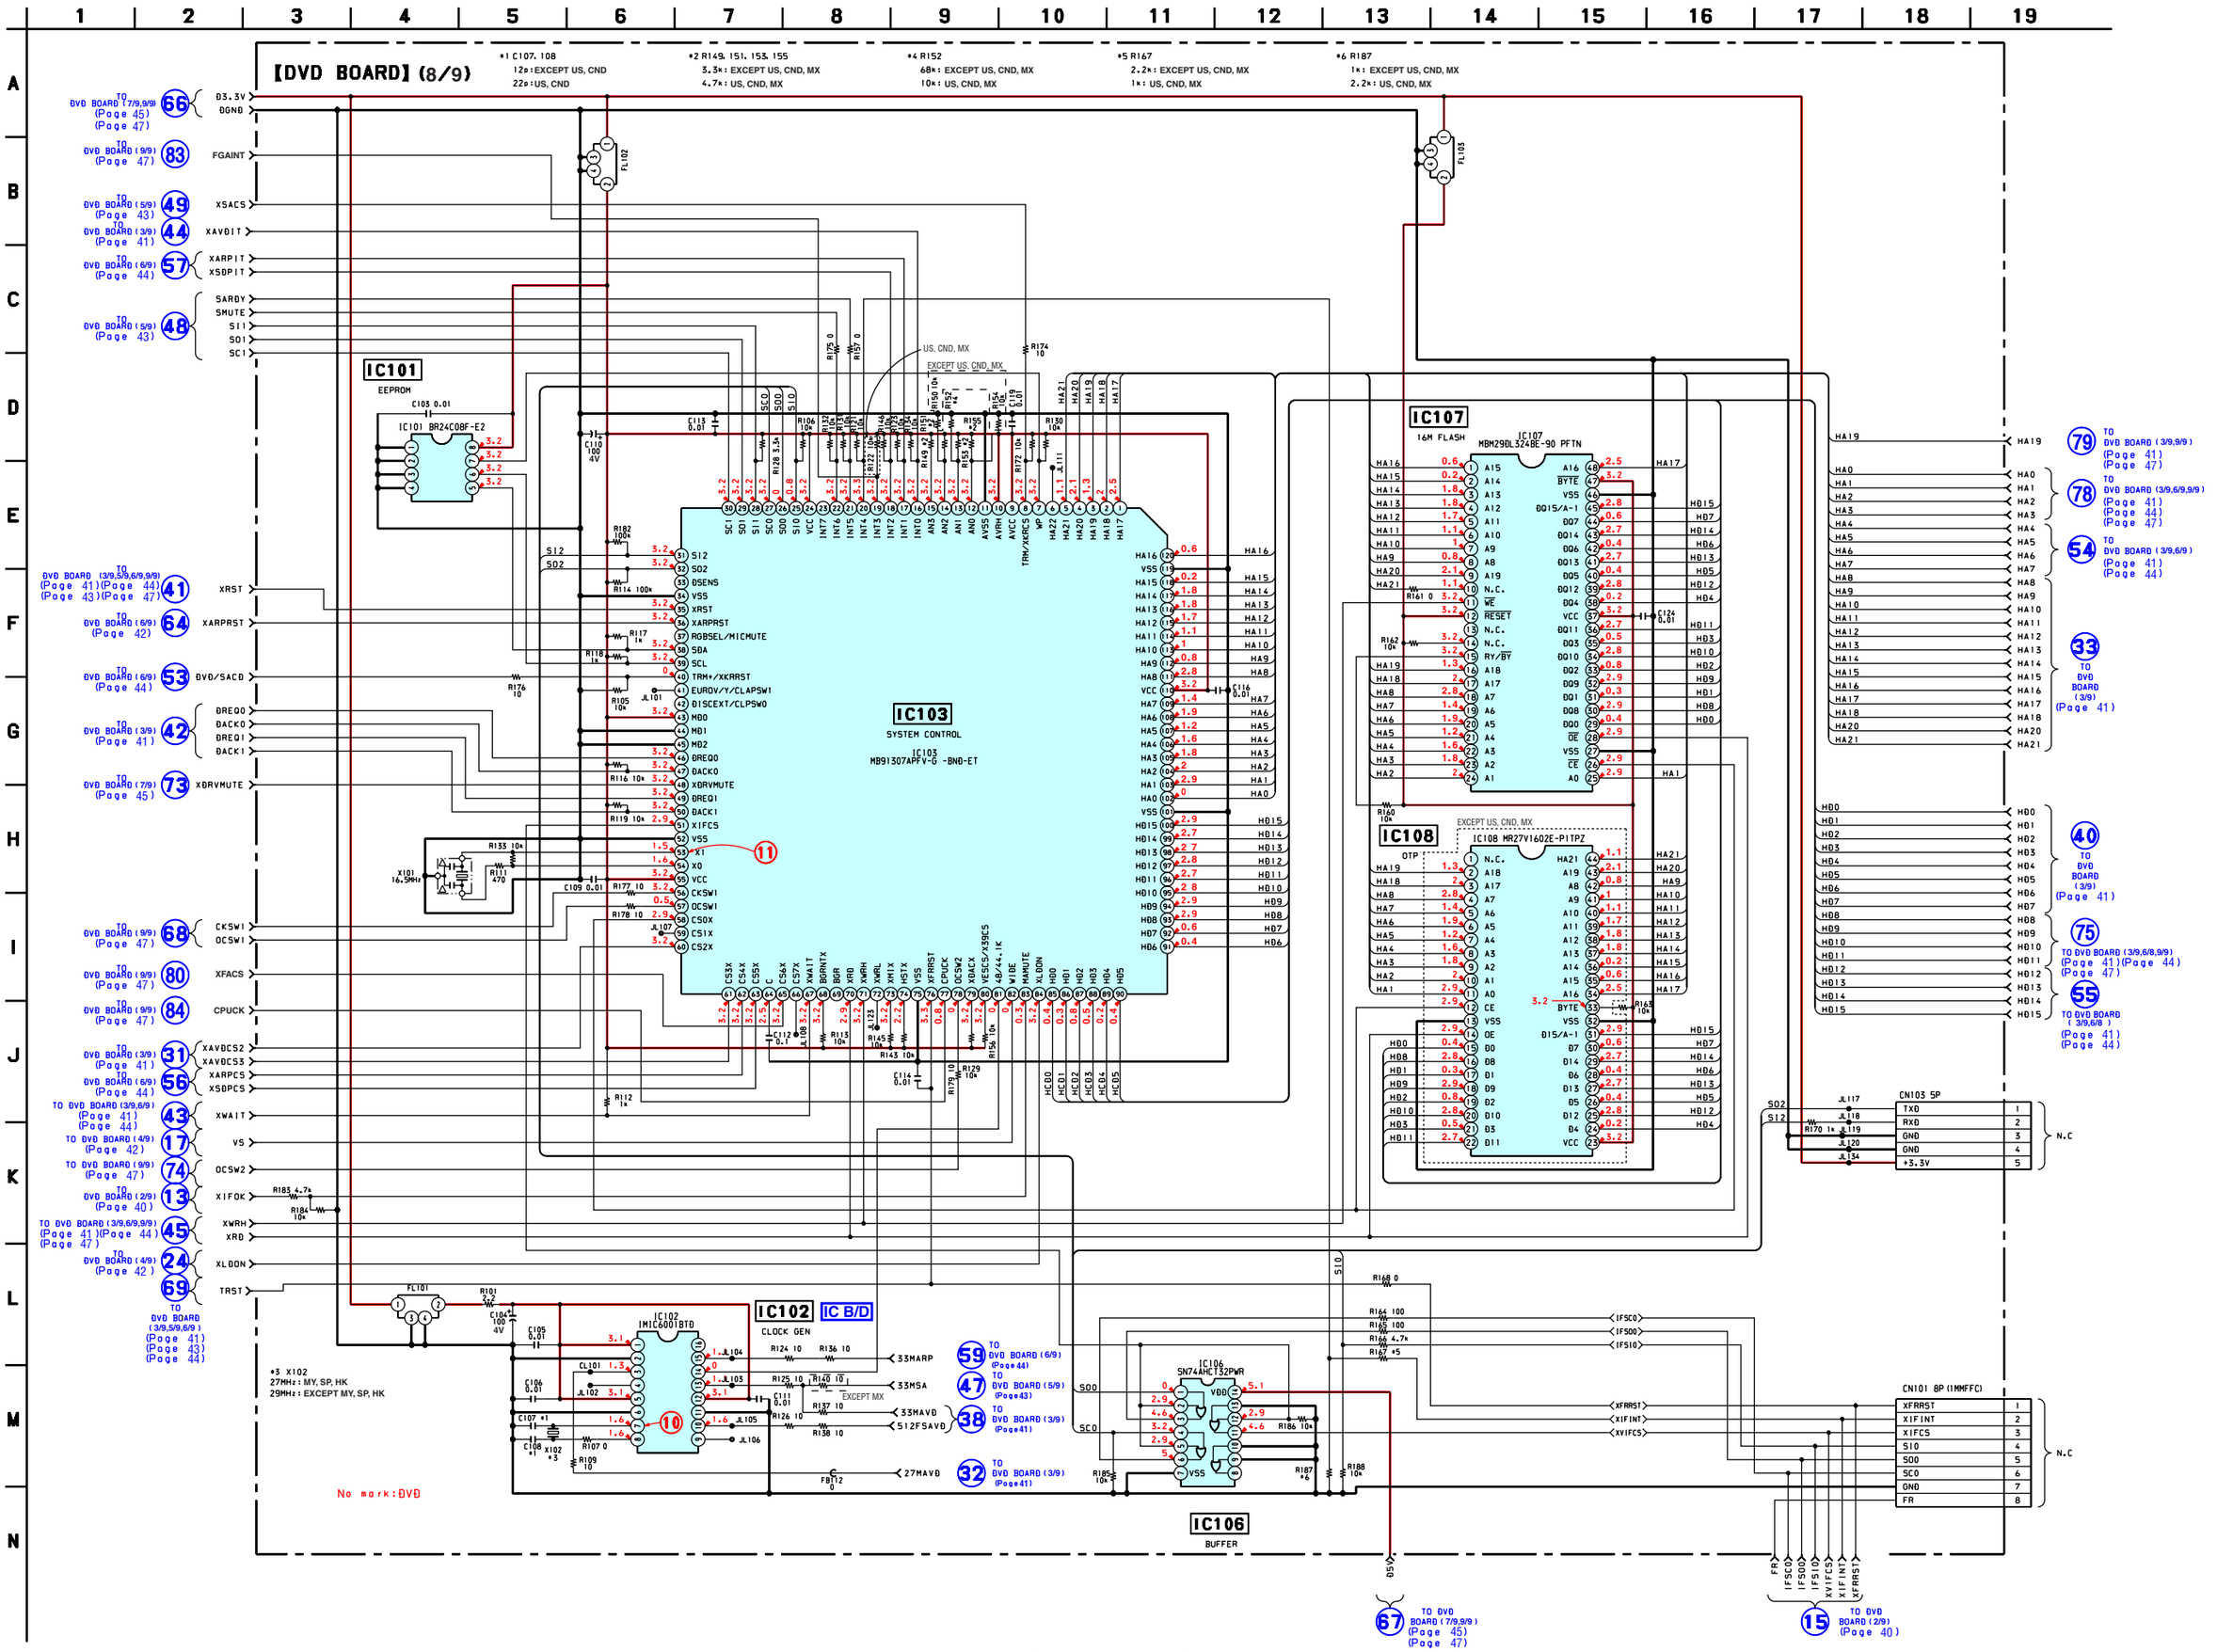
【DVD BOARD】(8/9)
*1 C107, 108
12p: EXCEPT US, CND
22p: US, CND
*2 R149, 151, 153, 155
3.3k: EXCEPT US, CND, MX
4.7k: US, CND, MX
*4 R152
68k: EXCEPT US, CND, MX
10k: US, CND, MX
*5 R167
2.2k: EXCEPT US, CND, MX
1k: US, CND, MX
*6 R187
1k: EXCEPT US, CND, MX
2.2k: US, CND, MX
IC101
EEPROM
IC101 BR24C08F-E2
IC103
SYSTEM CONTROL
IC103 MB91307APFV-G -BND-ET
IC107
16M FLASH
IC107 MBM29DL324BE-90 PFTN
IC108
IC108 MR27V1602E-P11PZ
IC102
CLOCK GEN
IC102 IMIC6001BTD
IC106
BUFFER
IC106 SN74AHCT32PWR
CN103 5P
CN101 8P (1MMFFC)
EXCEPT US, CND, MX
US, CND, MX
No mark: DVD
*3 X102
27MHz: MY, SP, HK
29MHz: EXCEPT MY, SP, HK
TO DVD BOARD (7/9,9/9) (Page 45) (Page 47)
TO DVD BOARD (9/9) (Page 47)
TO DVD BOARD (5/9) (Page 43)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (3/9,5/9,6/9,9/9) (Page 41)(Page 44) (Page 43)(Page 47)
TO DVD BOARD (6/9) (Page 42)
TO DVD BOARD (6/9) (Page 44)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (7/9) (Page 45)
TO DVD BOARD (9/9) (Page 47)
TO DVD BOARD (3/9,6/9,9/9) (Page 41)(Page 44)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (2/9) (Page 40)
TO DVD BOARD (3/9,6/9,9/9) (Page 41)(Page 44)(Page 47)
TO DVD BOARD (4/9) (Page 42)
TO DVD BOARD (3/9,5/9,6/9) (Page 41) (Page 43) (Page 44)
TO DVD BOARD (6/9) (Page44)
TO DVD BOARD (5/9) (Page43)
TO DVD BOARD (3/9) (Page41)
TO DVD BOARD (3/9) (Page41)
TO DVD BOARD (7/9,9/9) (Page 45) (Page 47)
TO DVD BOARD (2/9) (Page 40)
TO DVD BOARD (3/9,6/8,9/9) (Page 41)(Page 44) (Page 47)
TO DVD BOARD (3/9) (Page 41)
TO DVD BOARD (3/9,6/9) (Page 41) (Page 44)
TO DVD BOARD (3/9,6/8) (Page 41) (Page 44)
N.C

5-14. SCHEMATIC DIAGRAM – DVD SECTION (9/9) –

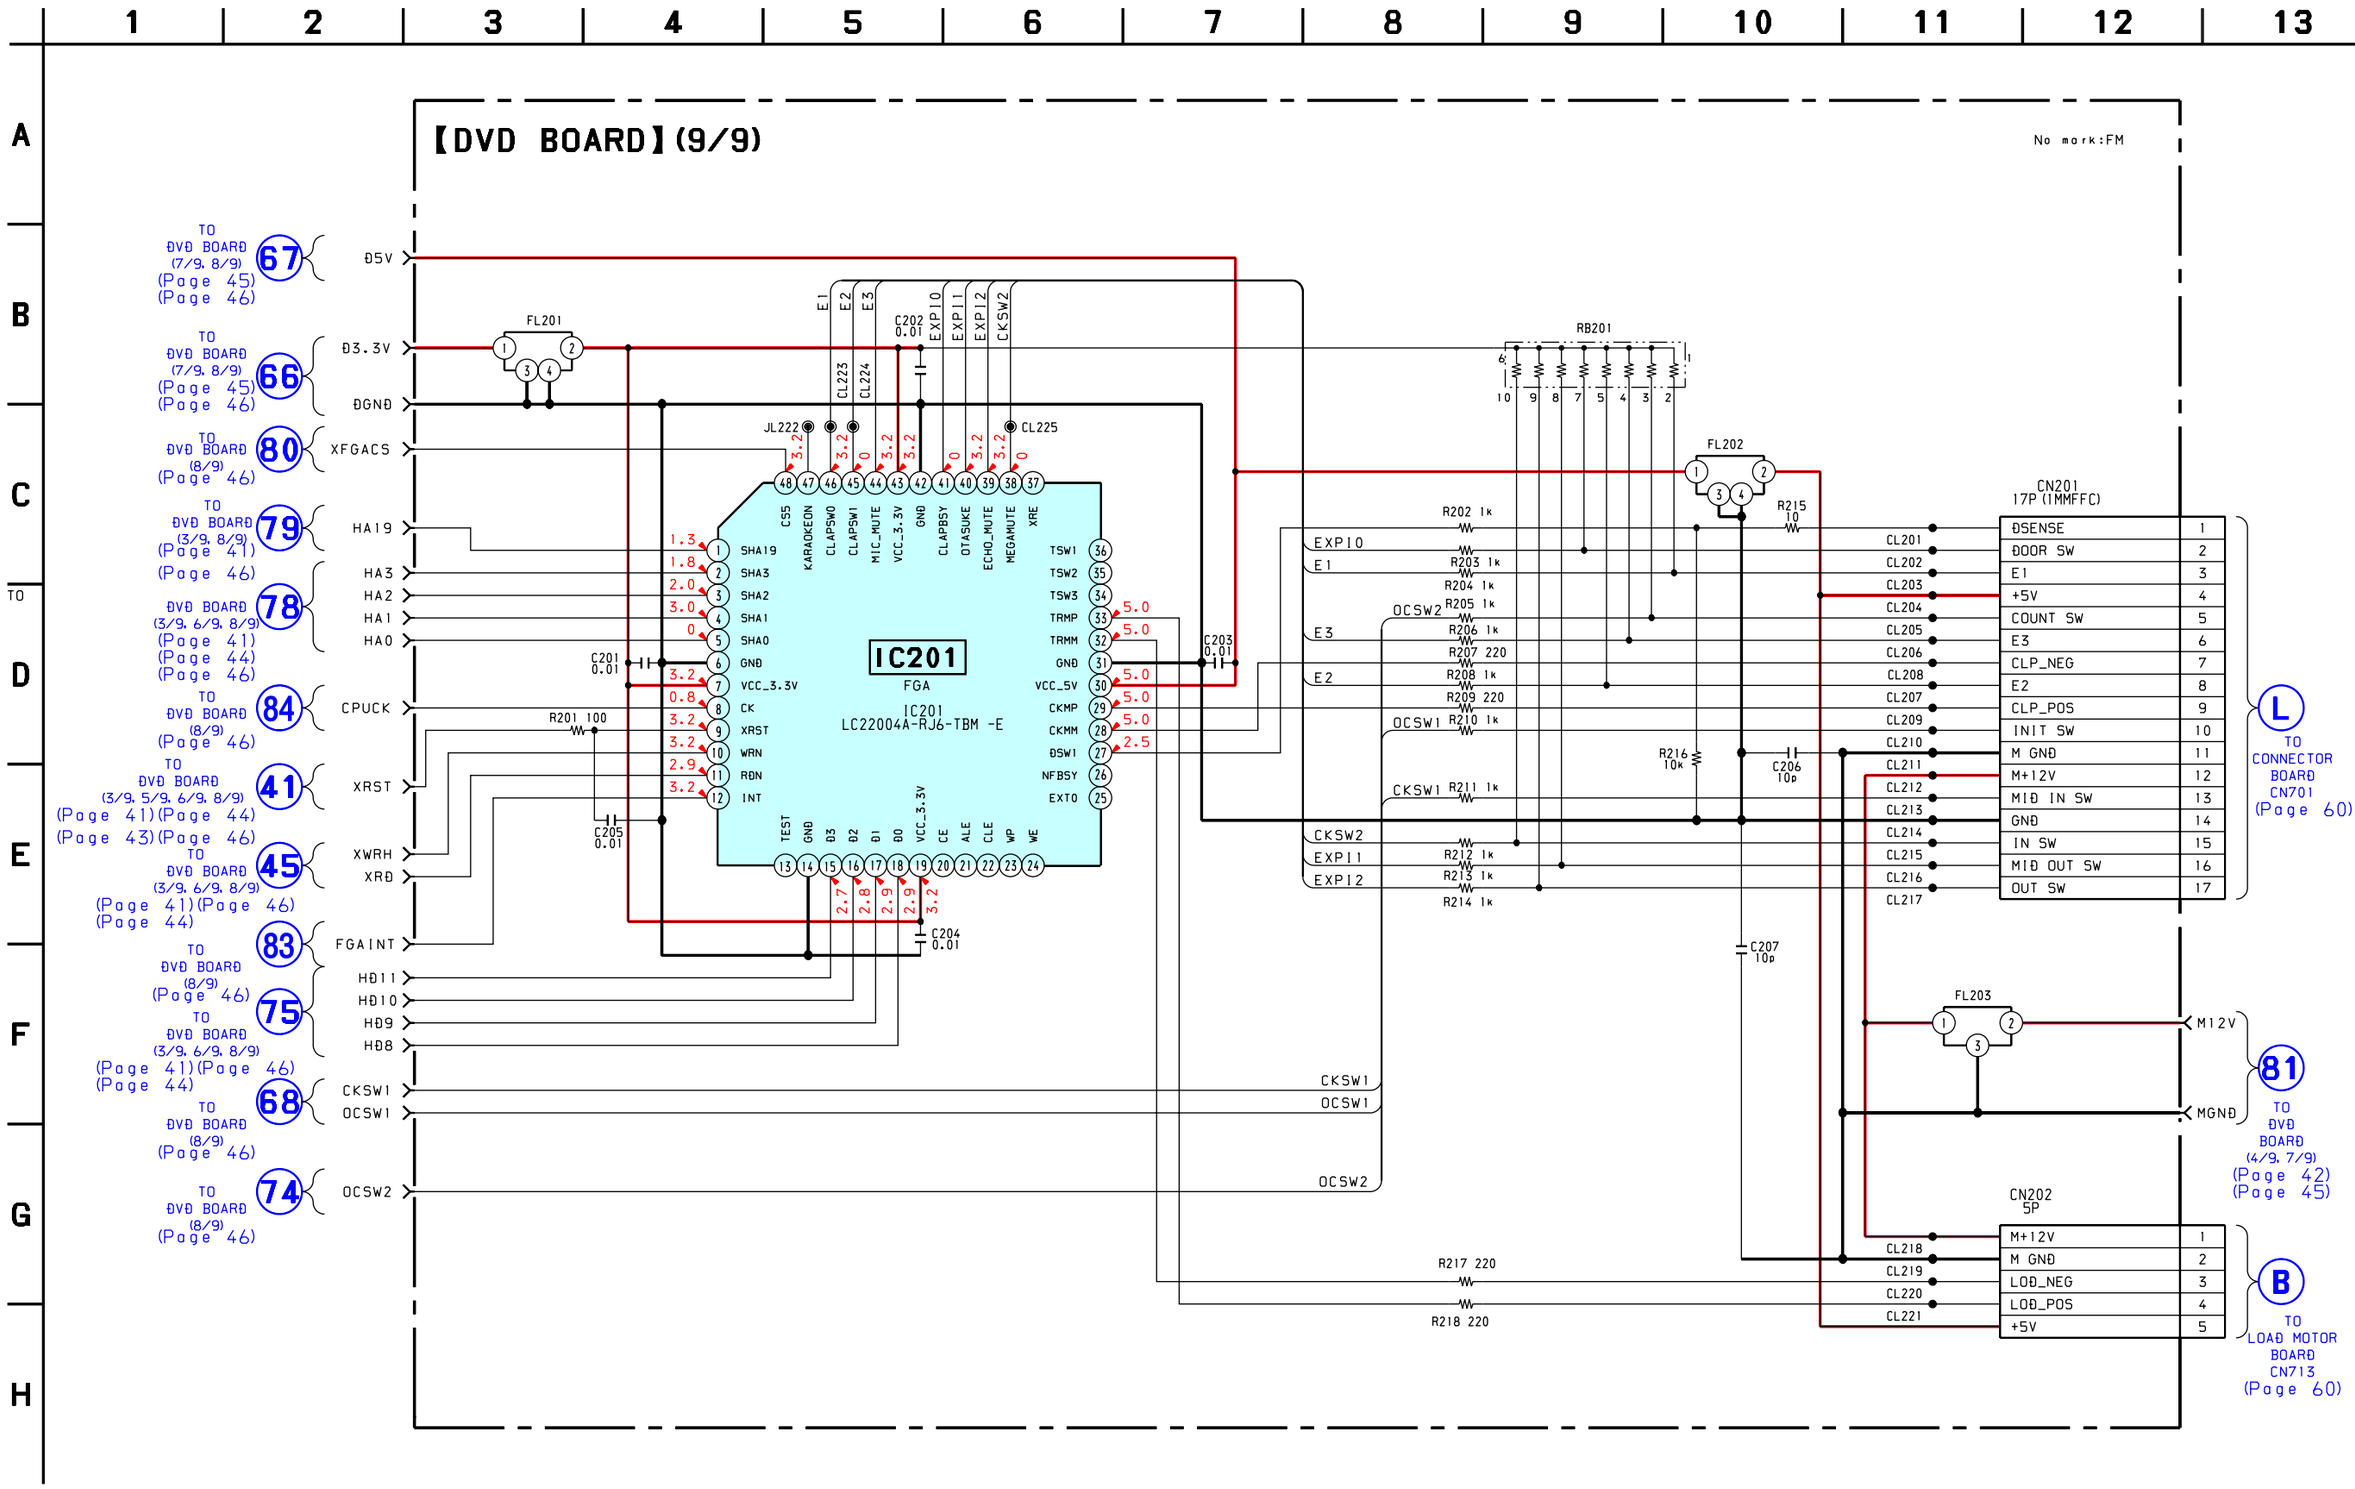

5-15. PRINTED WIRING BOARD – AMP SECTION (SIDE A) – • See page 30 for Circuit Boards Location.

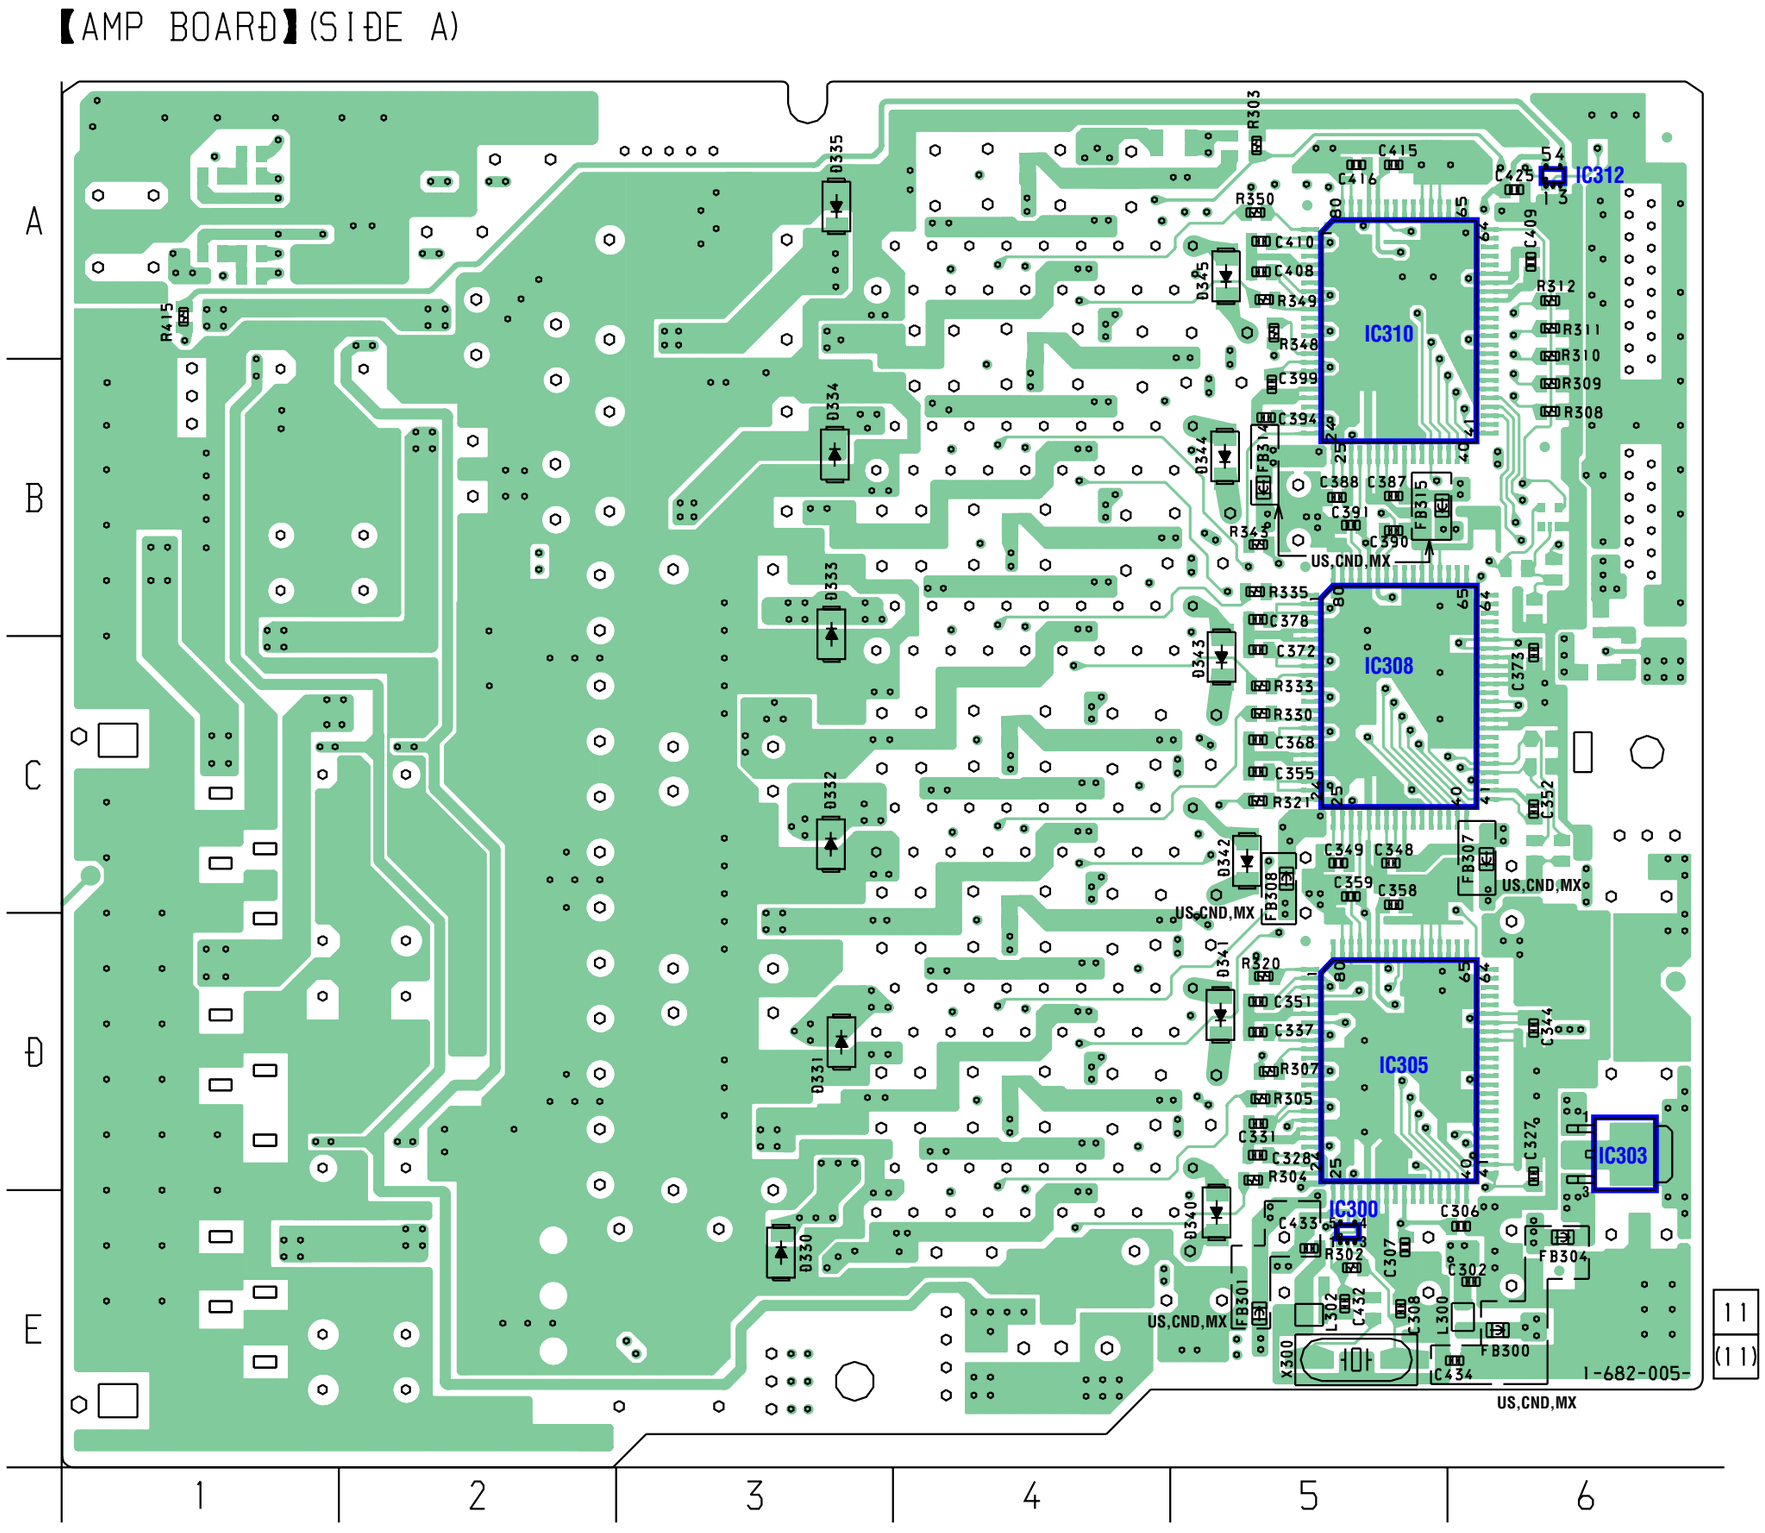

- **Semiconductor Location**

Ref. No.	Location
D330	E-3
D331	D-3
D332	C-3
D333	B-3
D334	B-3
D335	A-3
D340	E-5
D341	D-5
D342	C-5
D343	C-5
D344	B-5
D345	A-5
IC300	E-5
IC303	E-6
IC305	D-5
IC308	C-5
IC310	A-5
IC312	A-6

5-16. PRINTED WIRING BOARD – AMP SECTION (SIDE B) – • See page 30 for Circuit Boards Location.

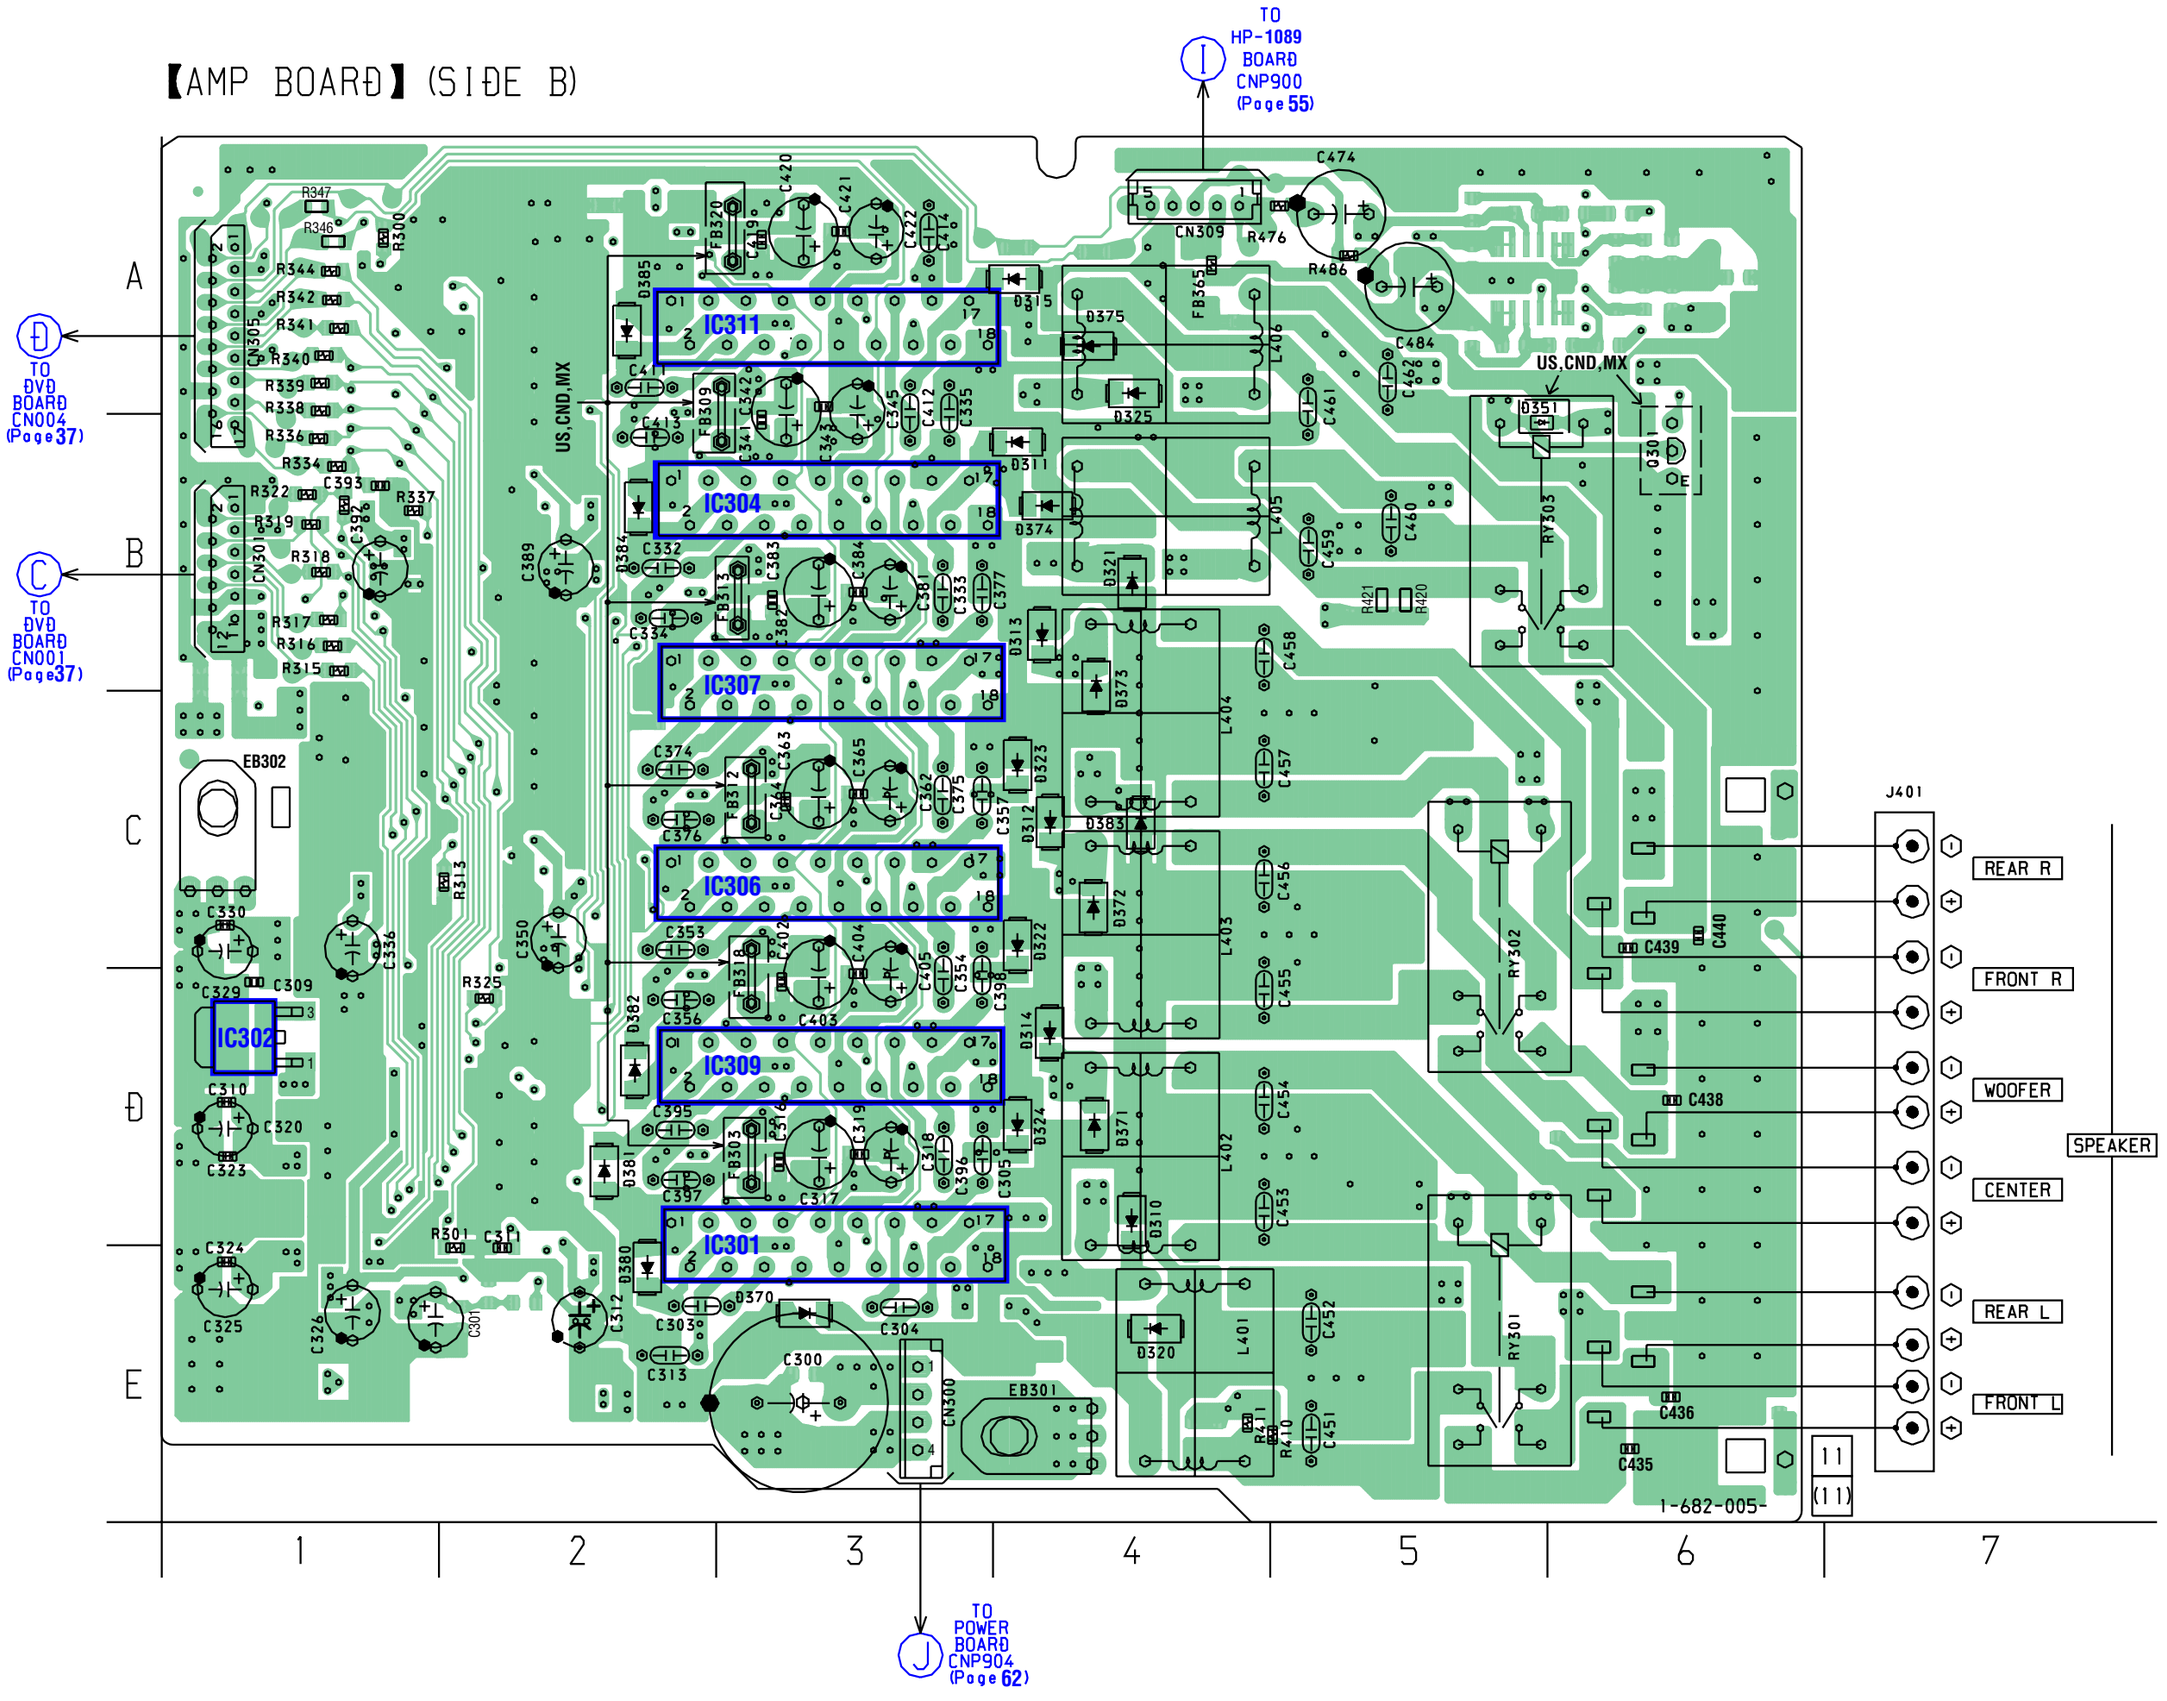

• **Semiconductor Location**

Ref. No.	Location
D310	D-4
D311	B-4
D312	C-4
D313	B-4
D314	D-4
D315	A-4
D320	E-4
D321	B-4
D322	C-4
D323	C-4
D324	D-4
D325	A-4
D351	B-5
D370	E-3
D371	D-4
D372	C-4
D373	B-4
D374	B-4
D375	A-4
D380	E-2
D381	D-2
D382	D-2
D383	C-4
D384	B-2
D385	A-2
IC301	E-3
IC302	D-1
IC304	B-3
IC306	C-3
IC307	B-3
IC309	D-3
IC311	A-3
Q301	B-6

5-17. SCHEMATIC DIAGRAM – AMP SECTION (1/2) – • See page 31 for Waveforms.

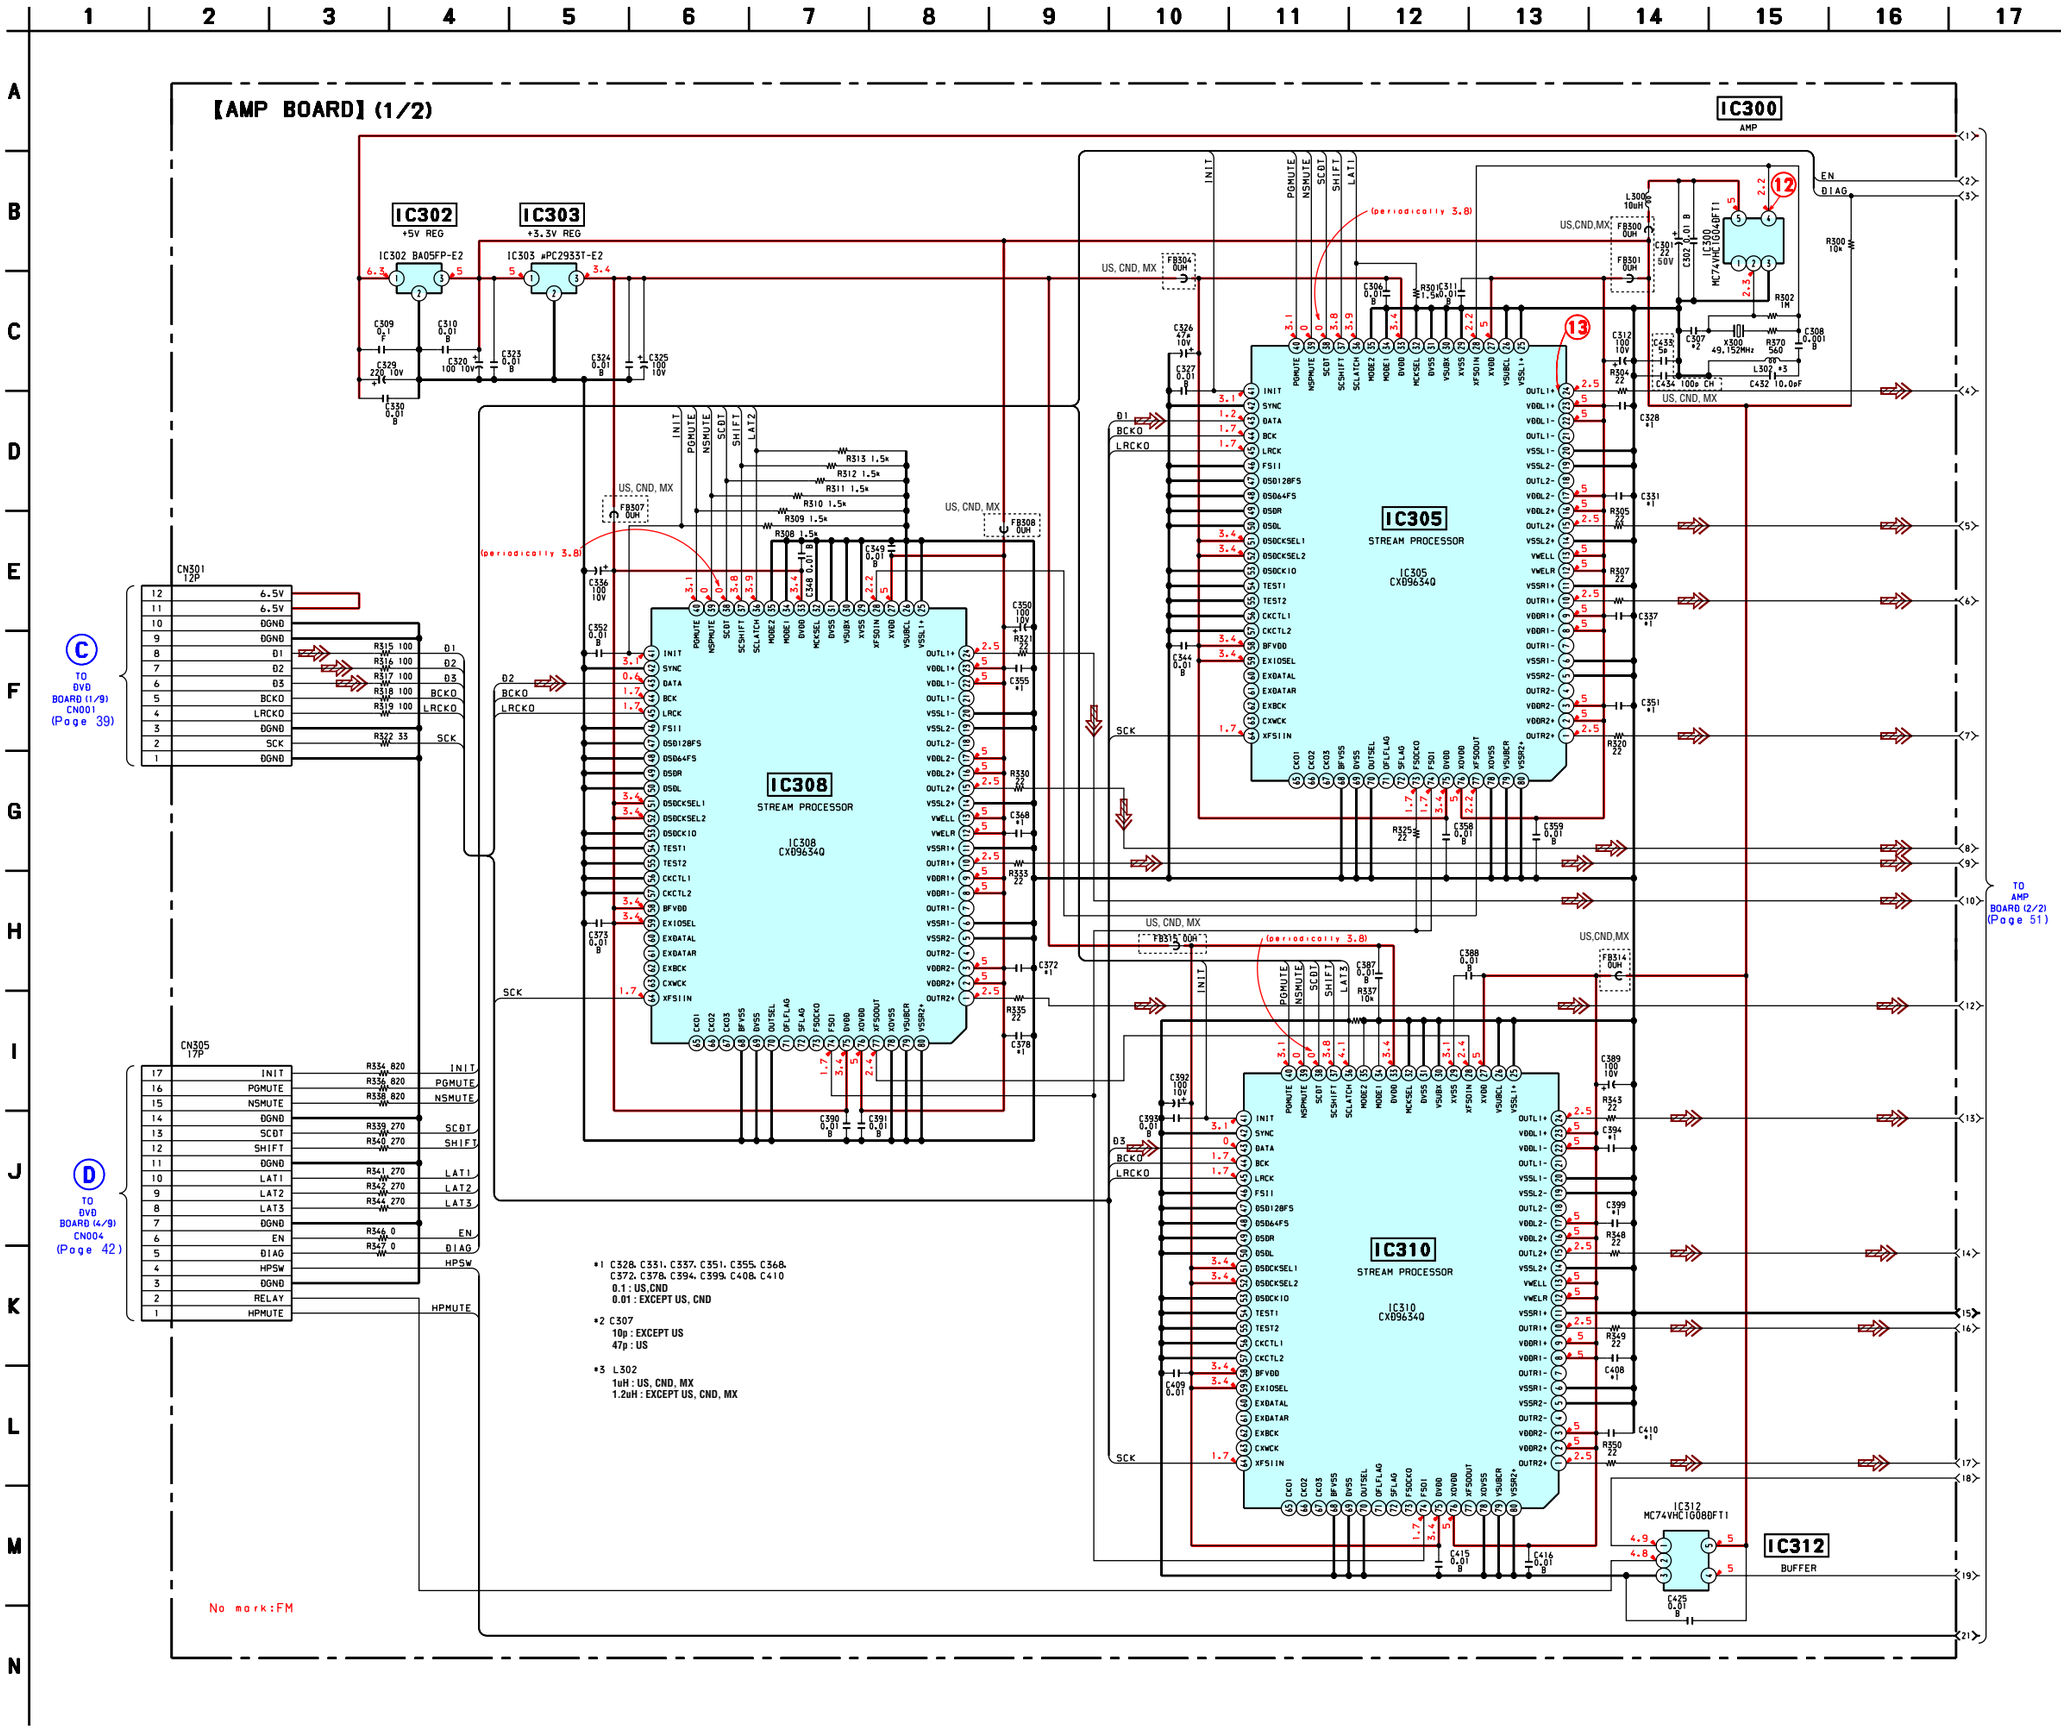

5-18. SCHEMATIC DIAGRAM – AMP SECTION (2/2) –

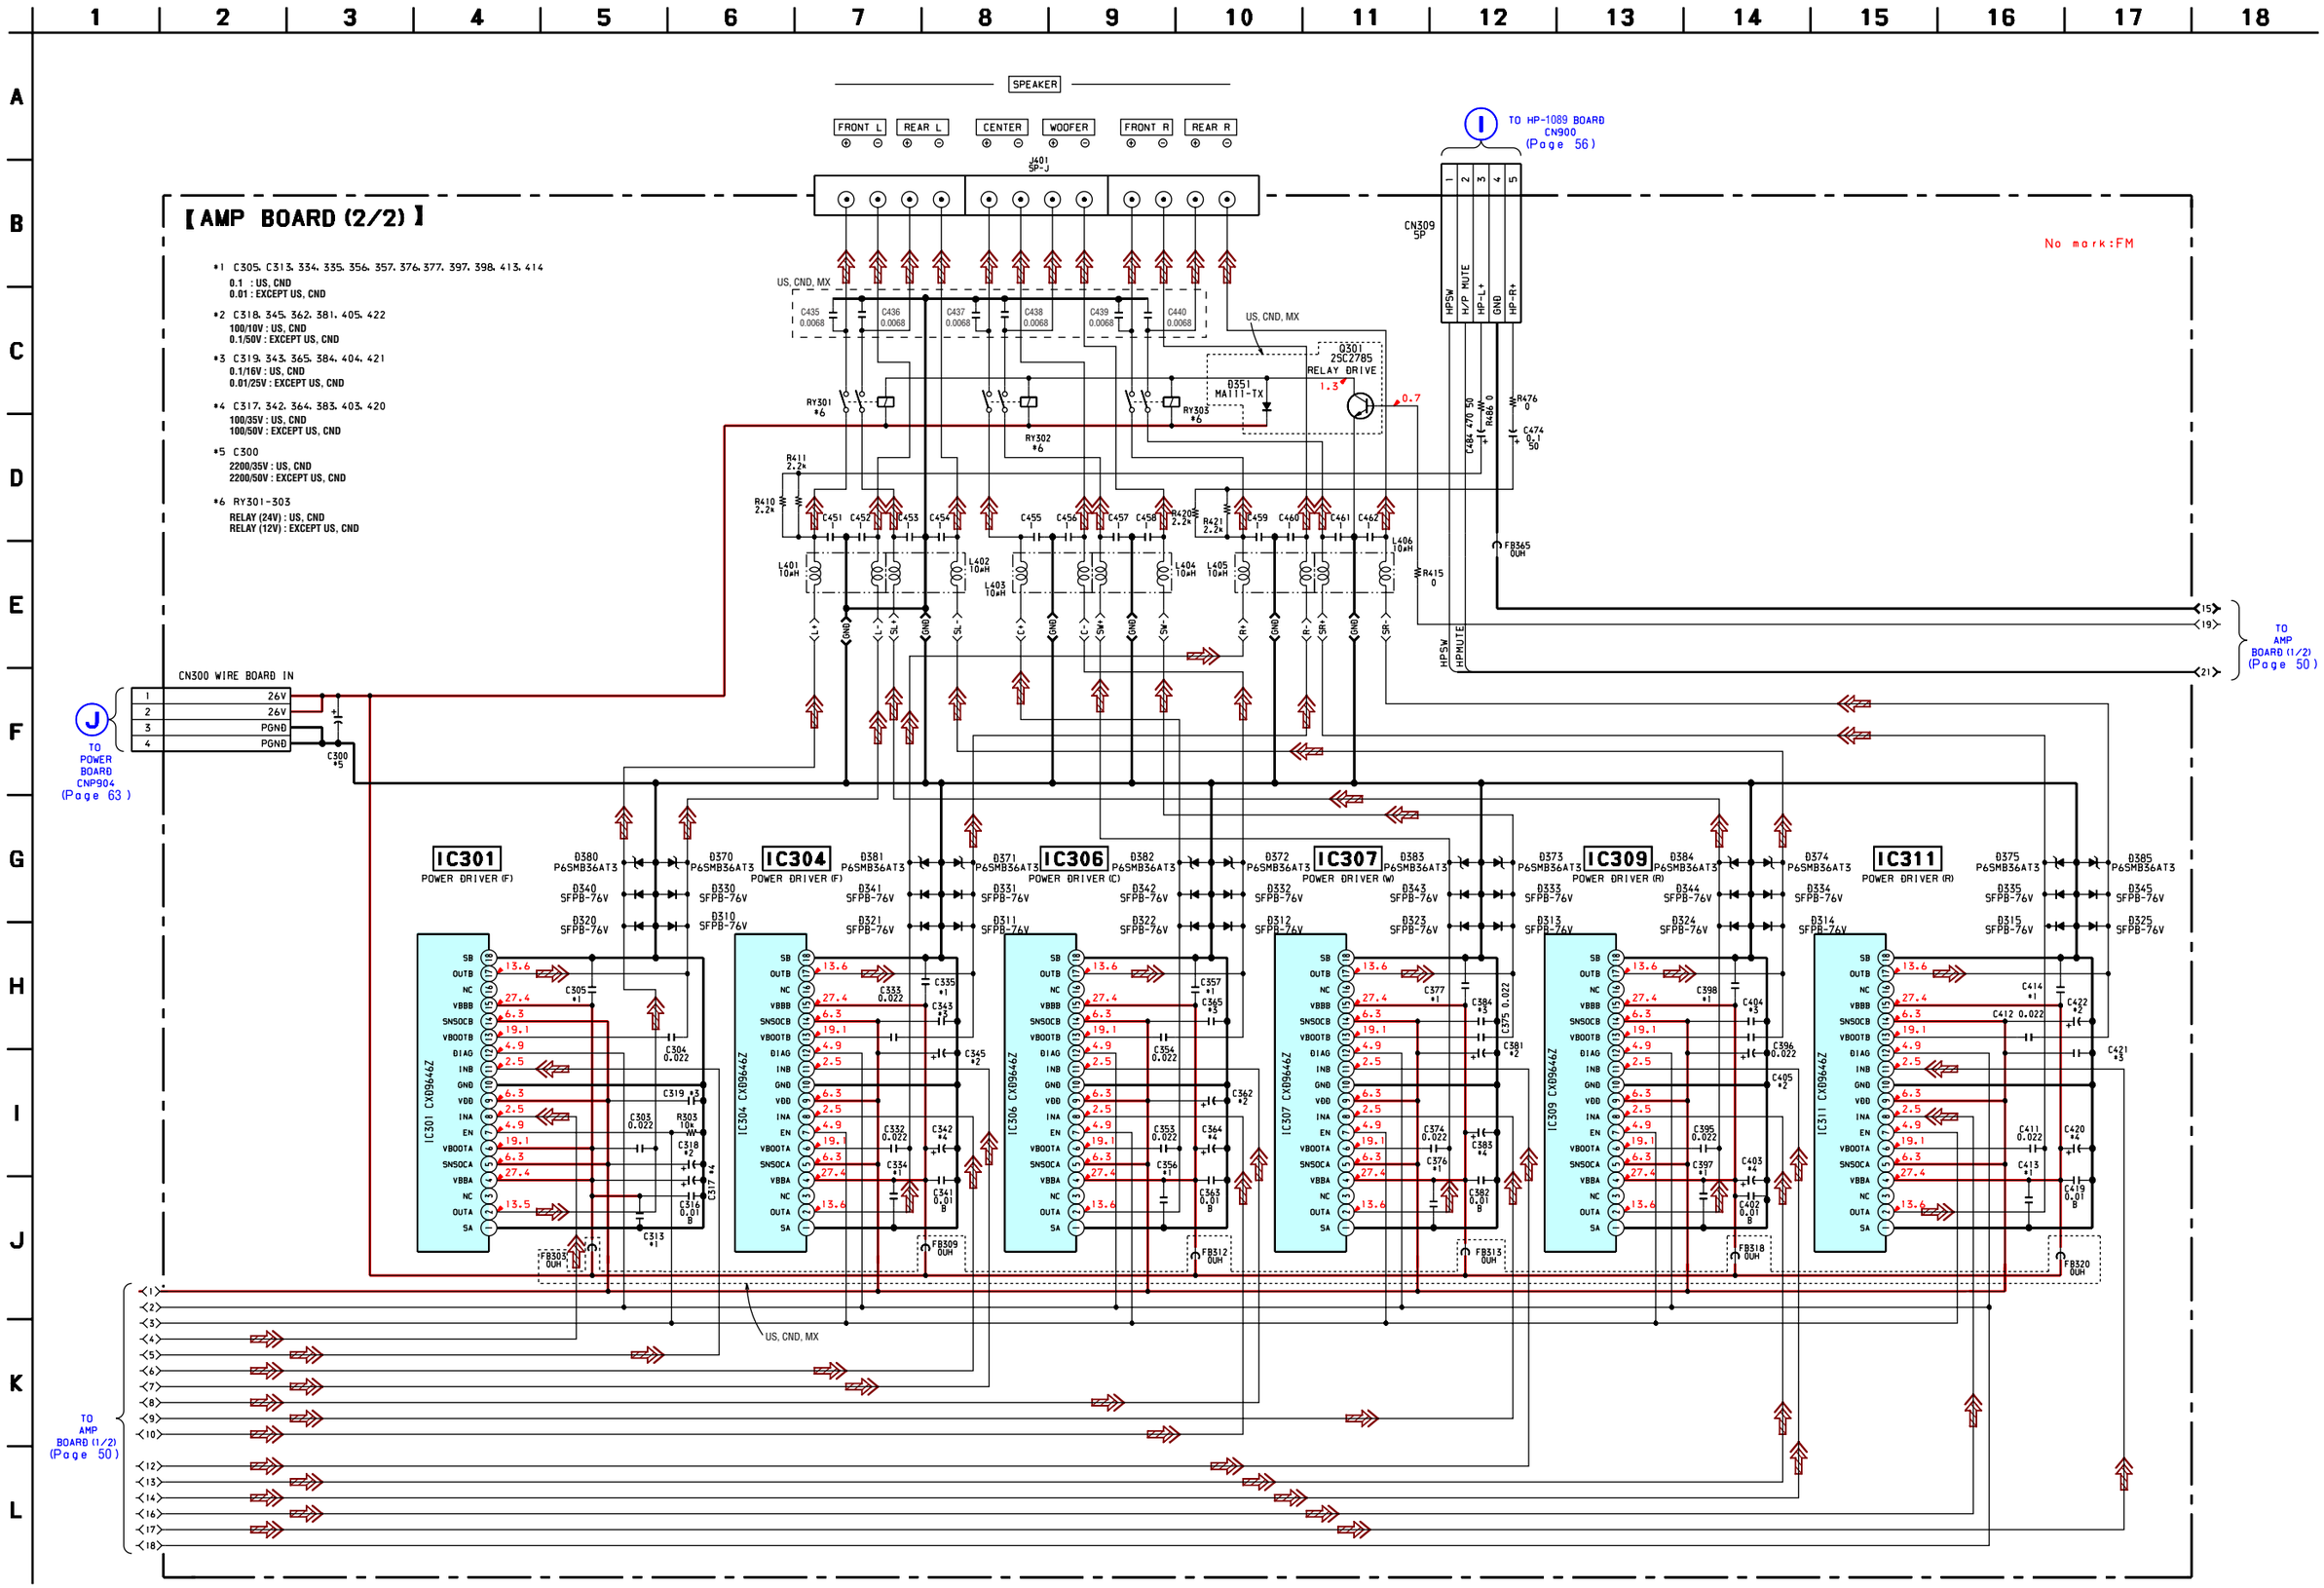

5-19. PRINTED WIRING BOARD – I/O SECTION – • See page 30 for Circuit Boards Location.

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D601	D-9	IC701	B-7	Q605	B-10
D602	D-10	IC702	B-8	Q606	B-10
				Q607	D-10
IC600	B-10	Q600	D-9	Q700	A-8
IC601	A-8	Q601	E-10	Q701	A-7
IC602	A-8	Q602	E-10	Q702	B-8
IC603	A-8	Q603	B-10	Q703	B-7
IC604	D-10	Q604	B-10	Q704	A-8
IC700	B-9				

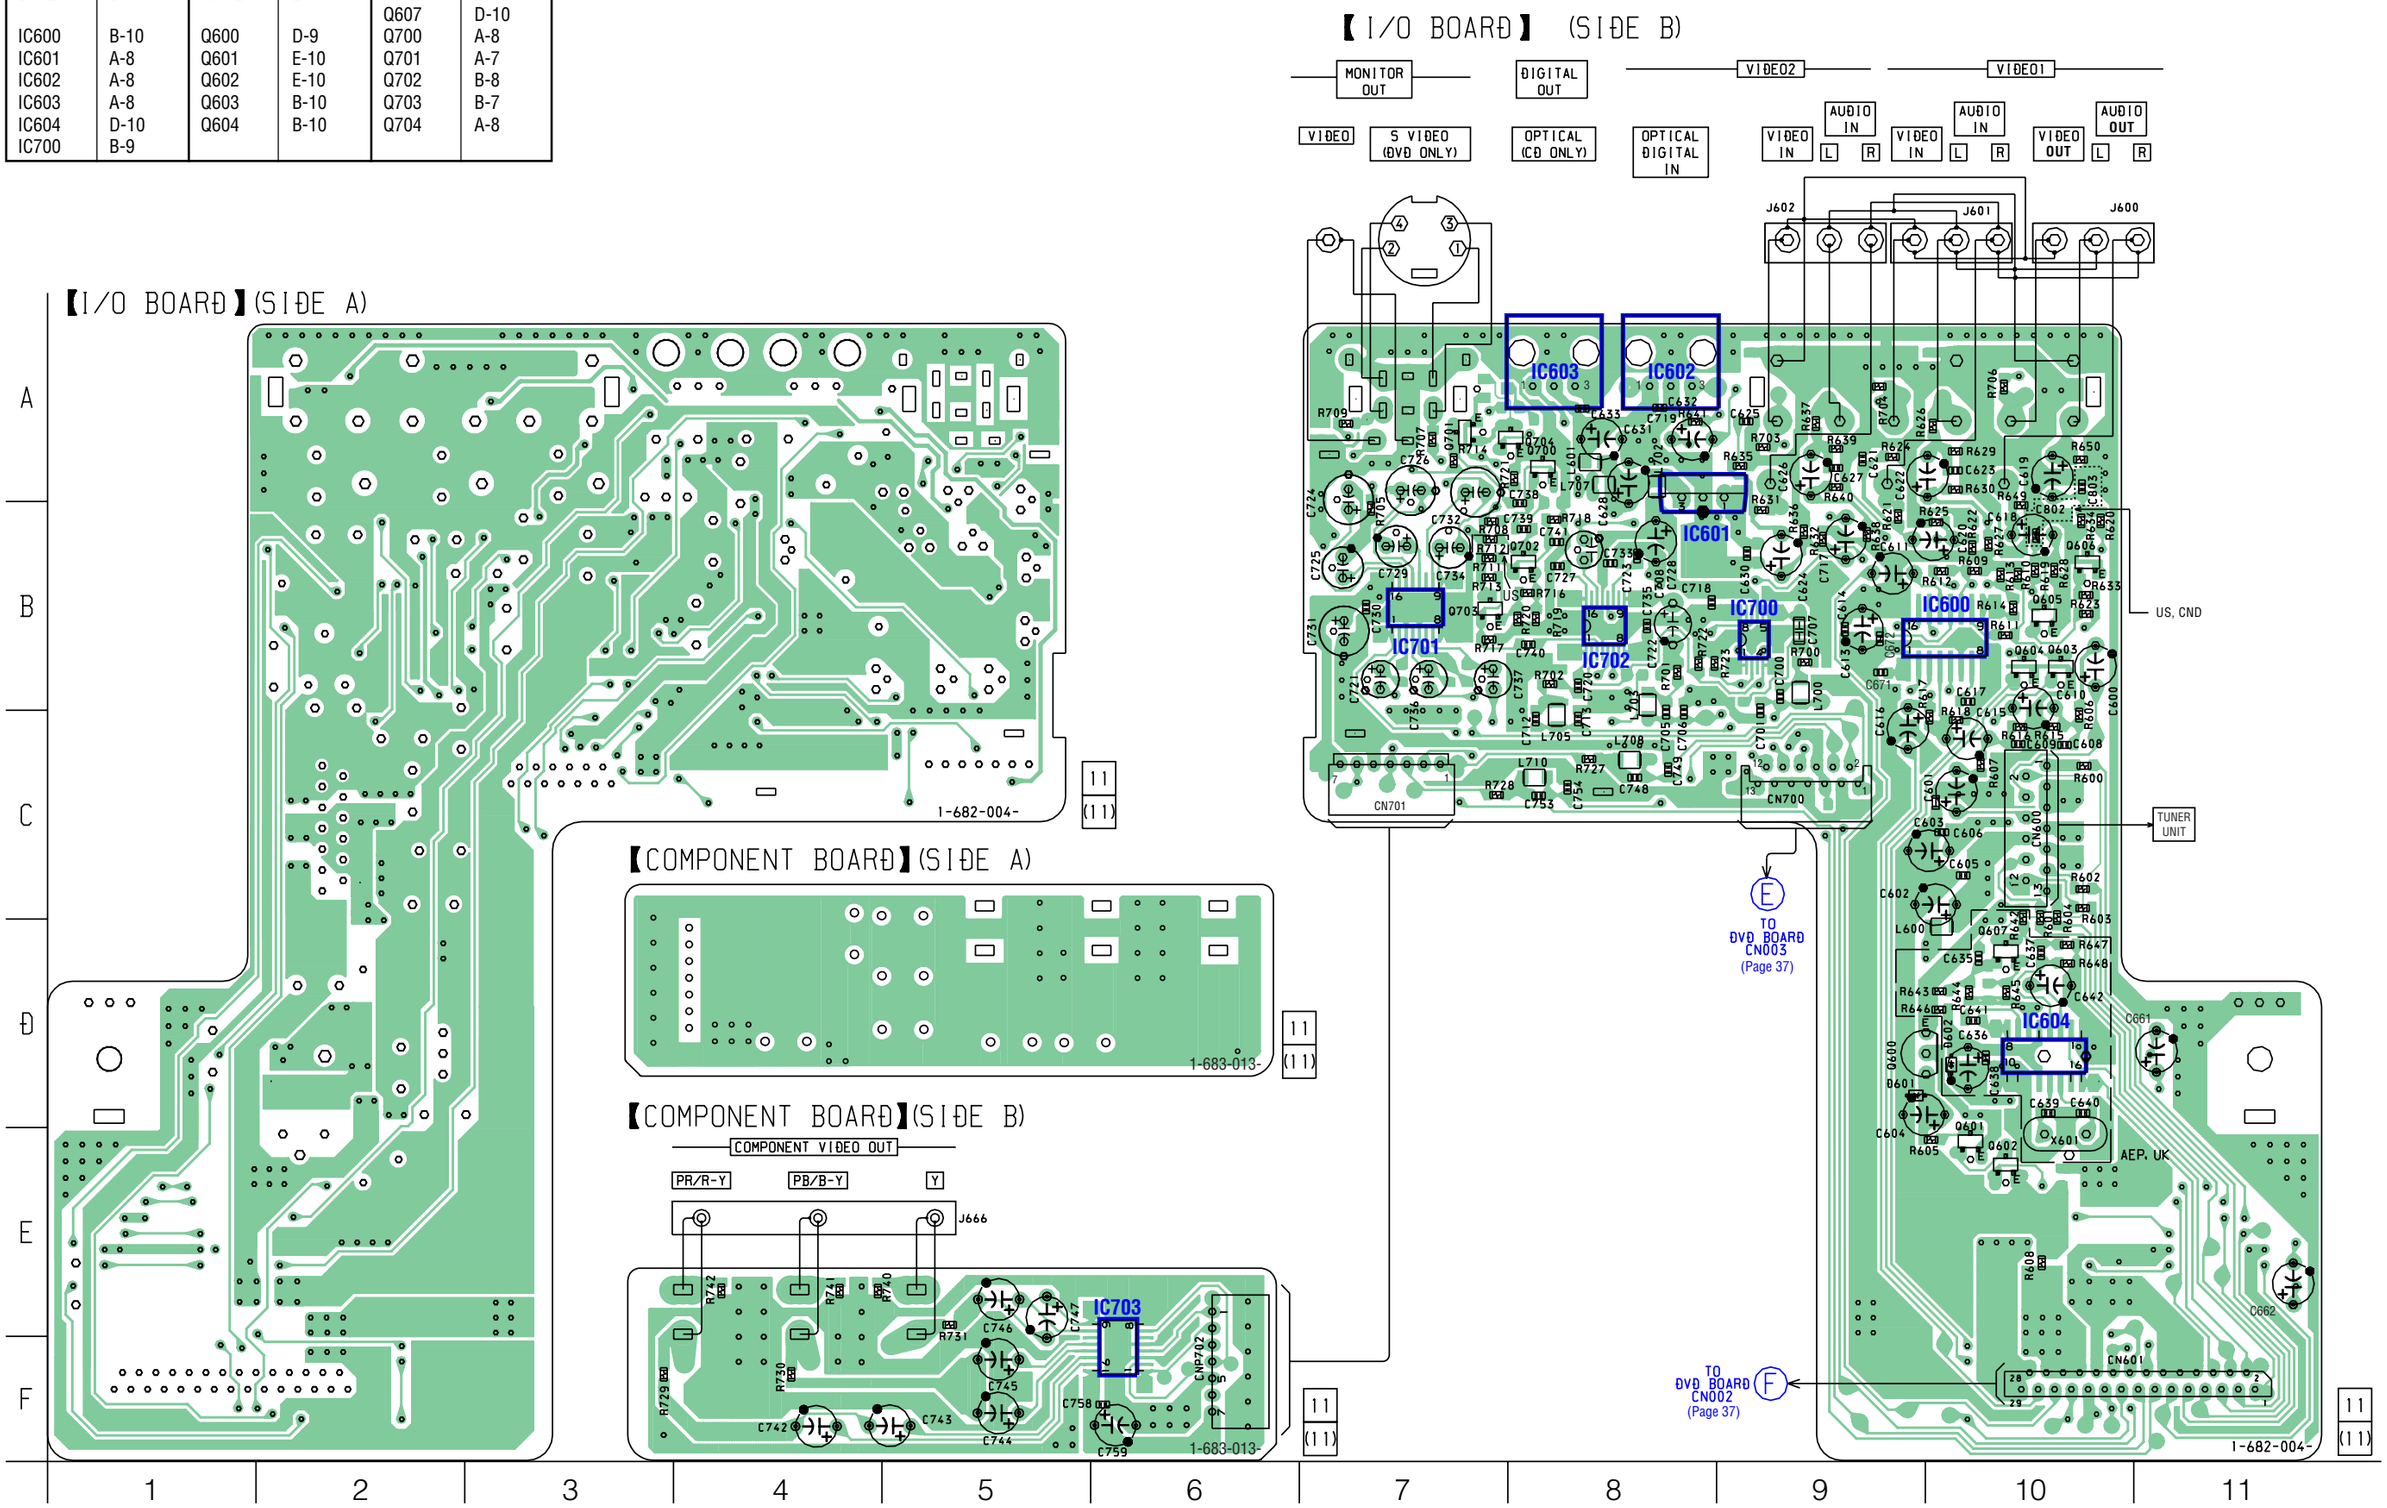

5-20. SCHEMATIC DIAGRAM – I/O SECTION (1/2) –

• See page 31 for Waveforms. • See page 64 for IC Block Diagrams.

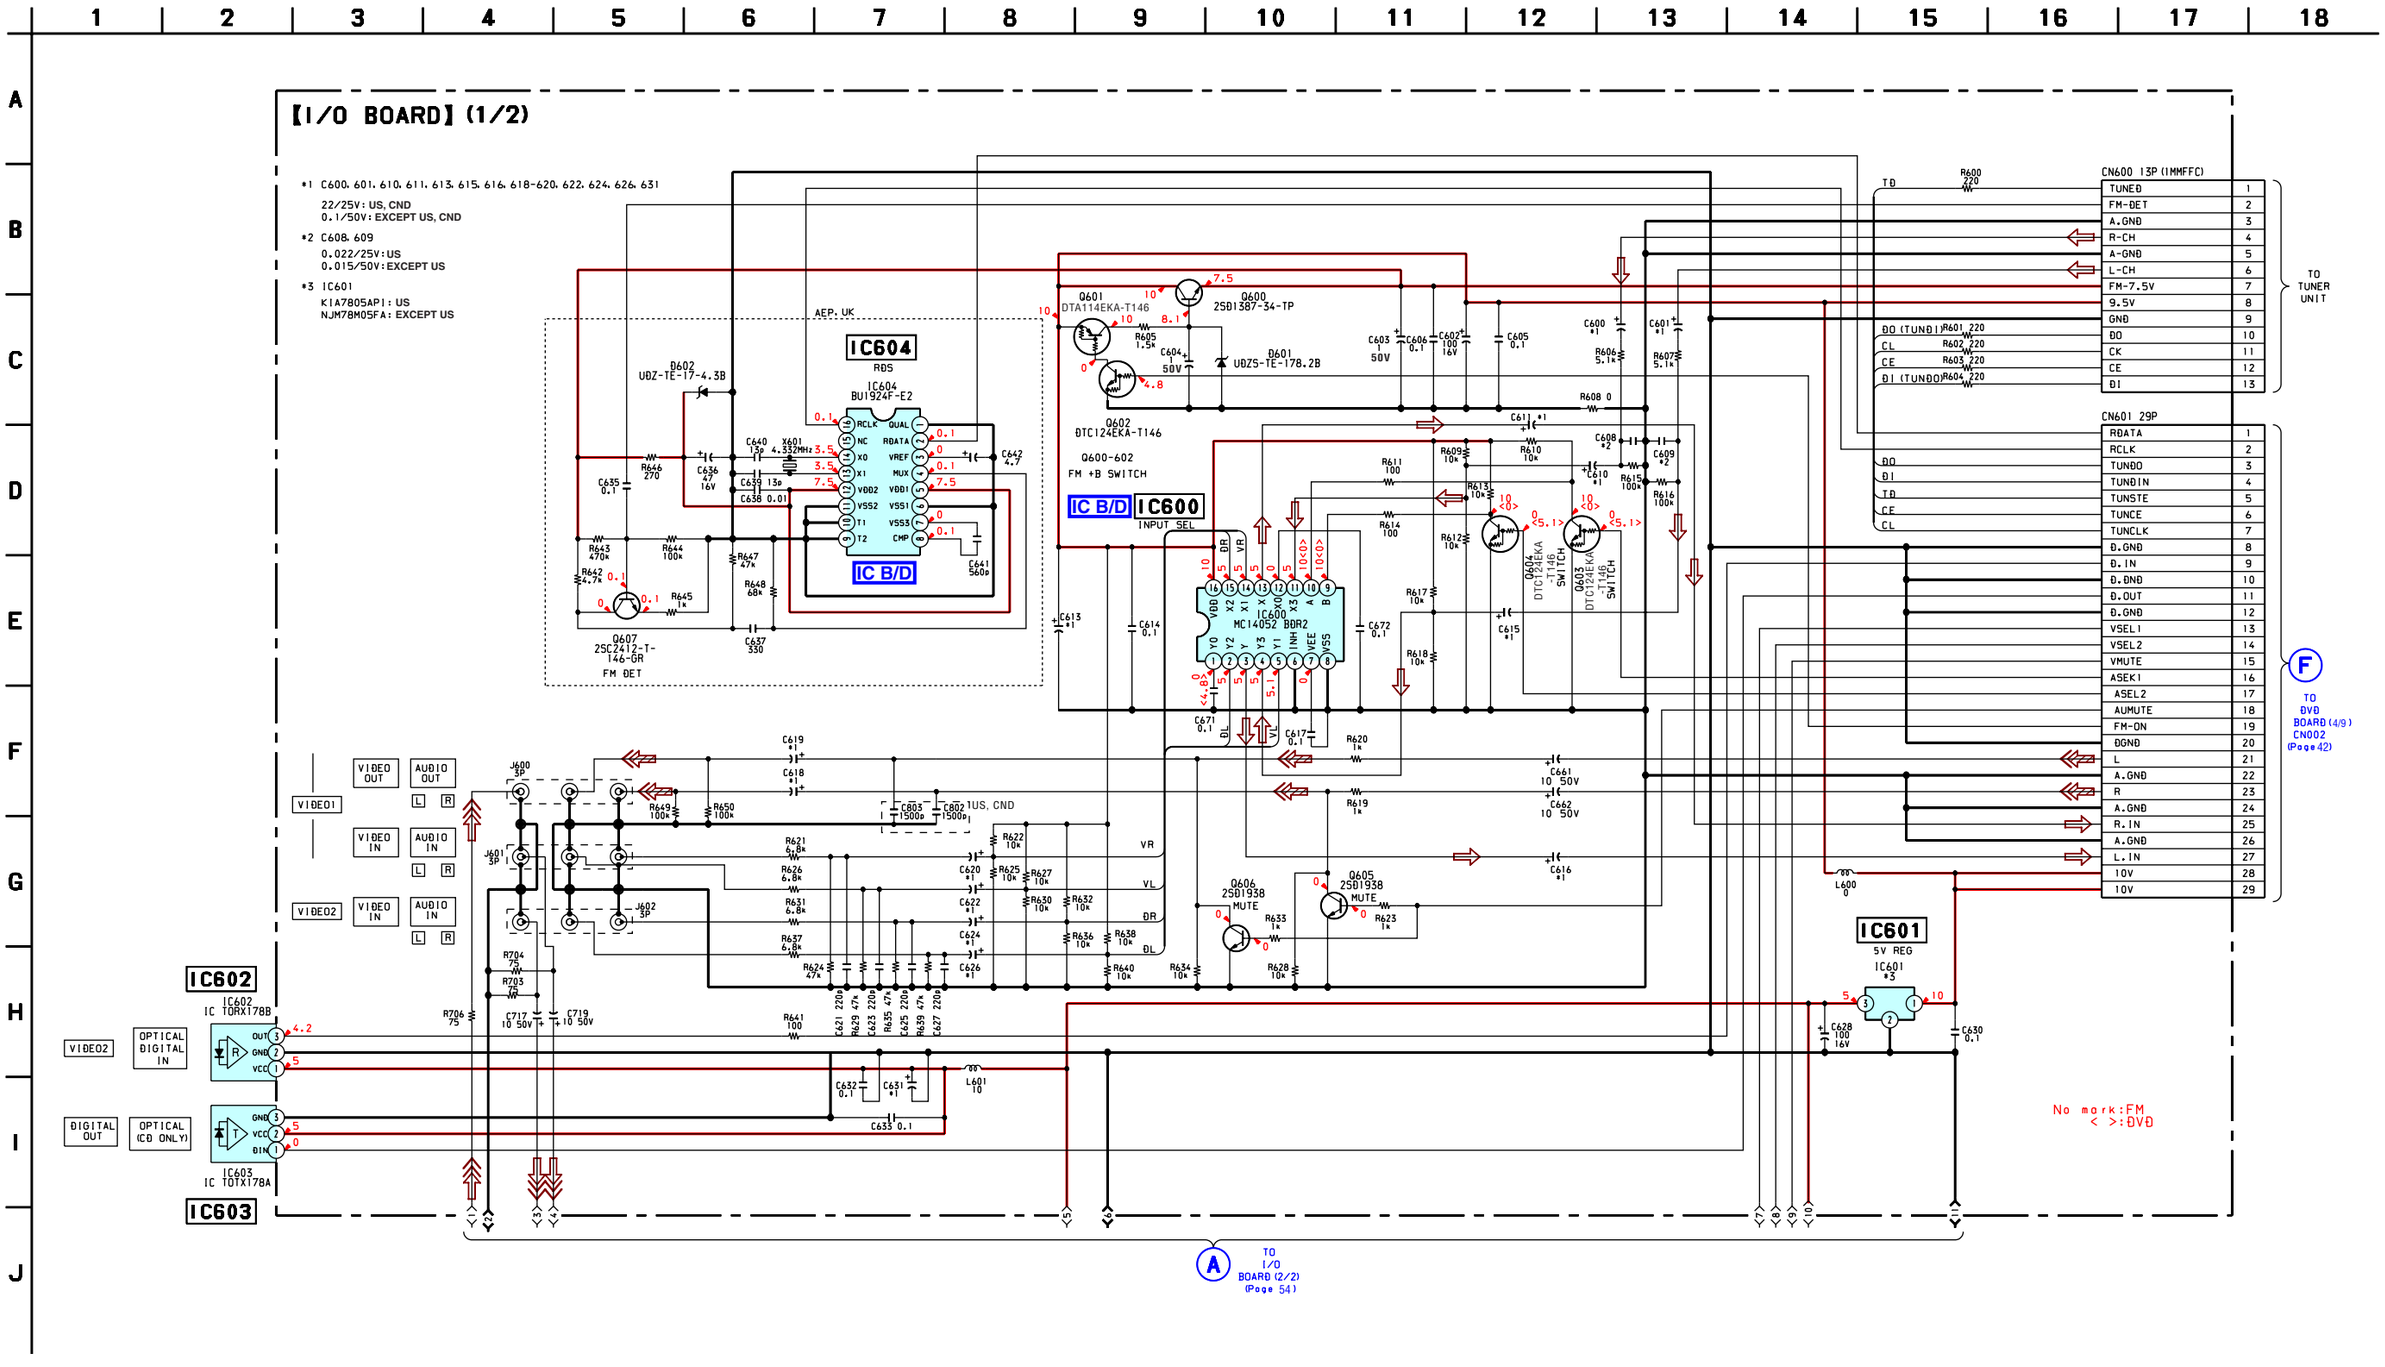

5-21. SCHEMATIC DIAGRAM – I/O SECTION (2/2) – • See page 31 for Wavefoms.

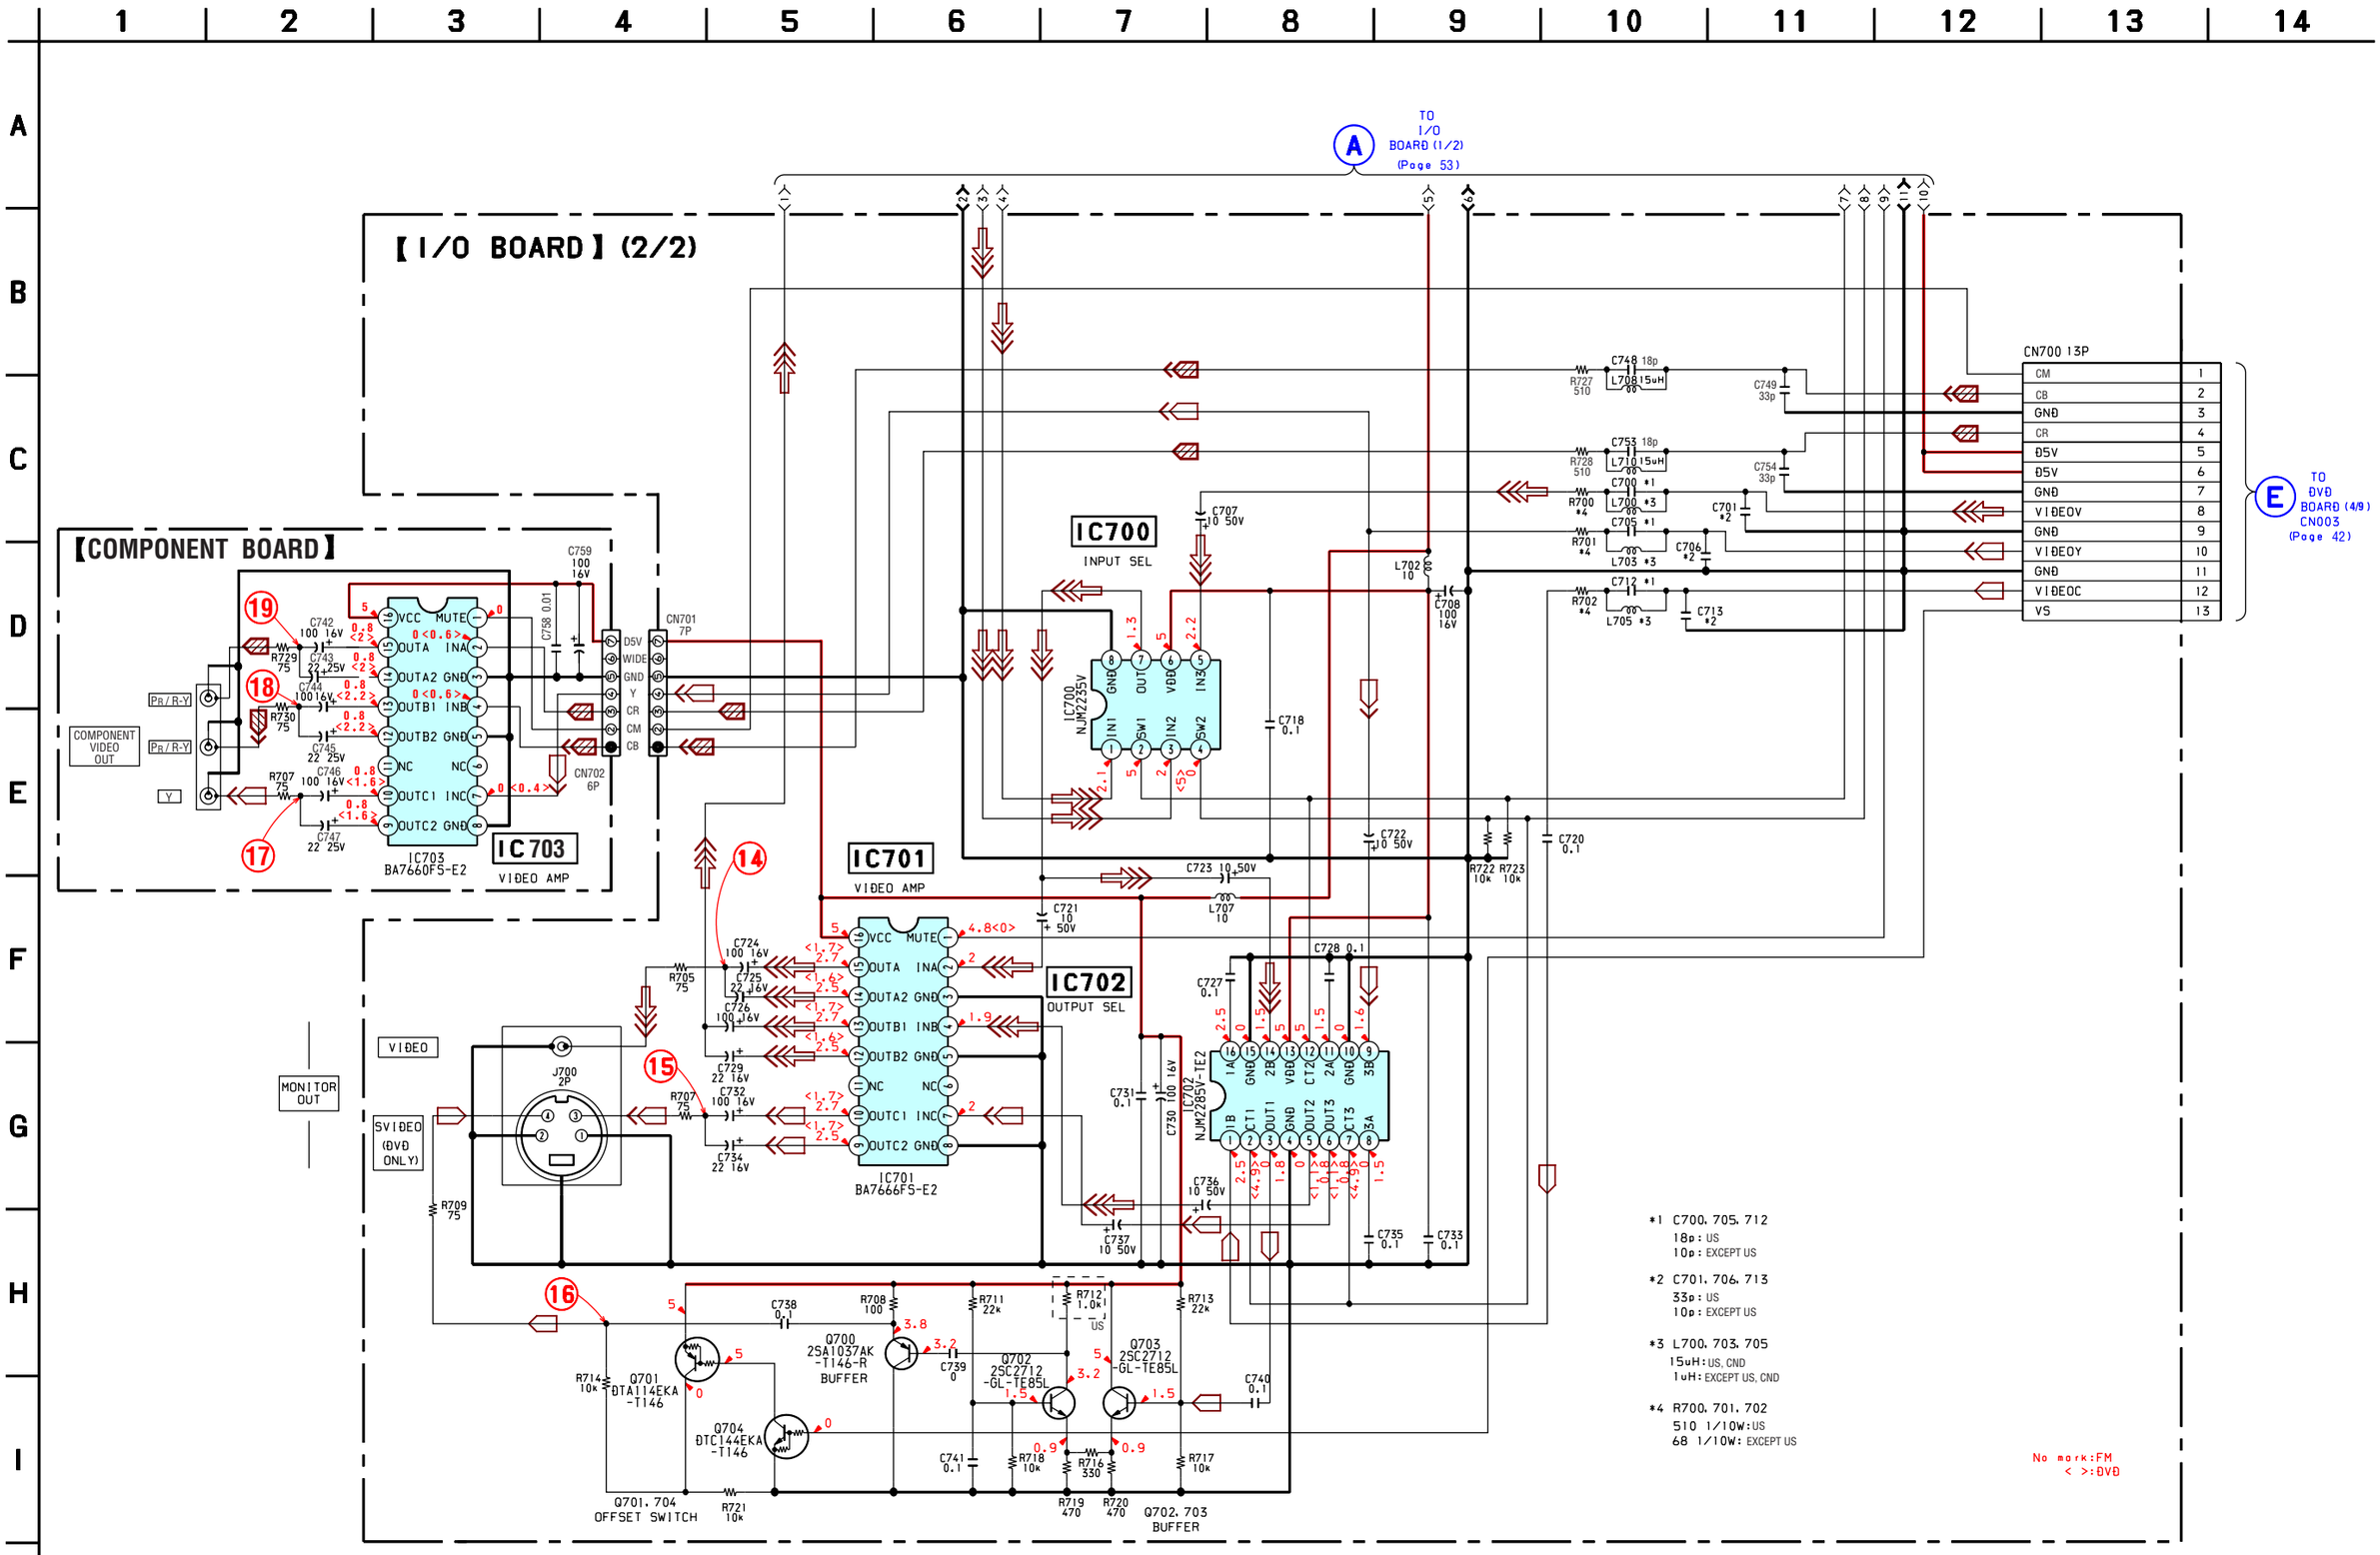

5-22. PRINTED WIRING BOARD – FRONT SECTION – • See page 30 for Circuit Boards Location.

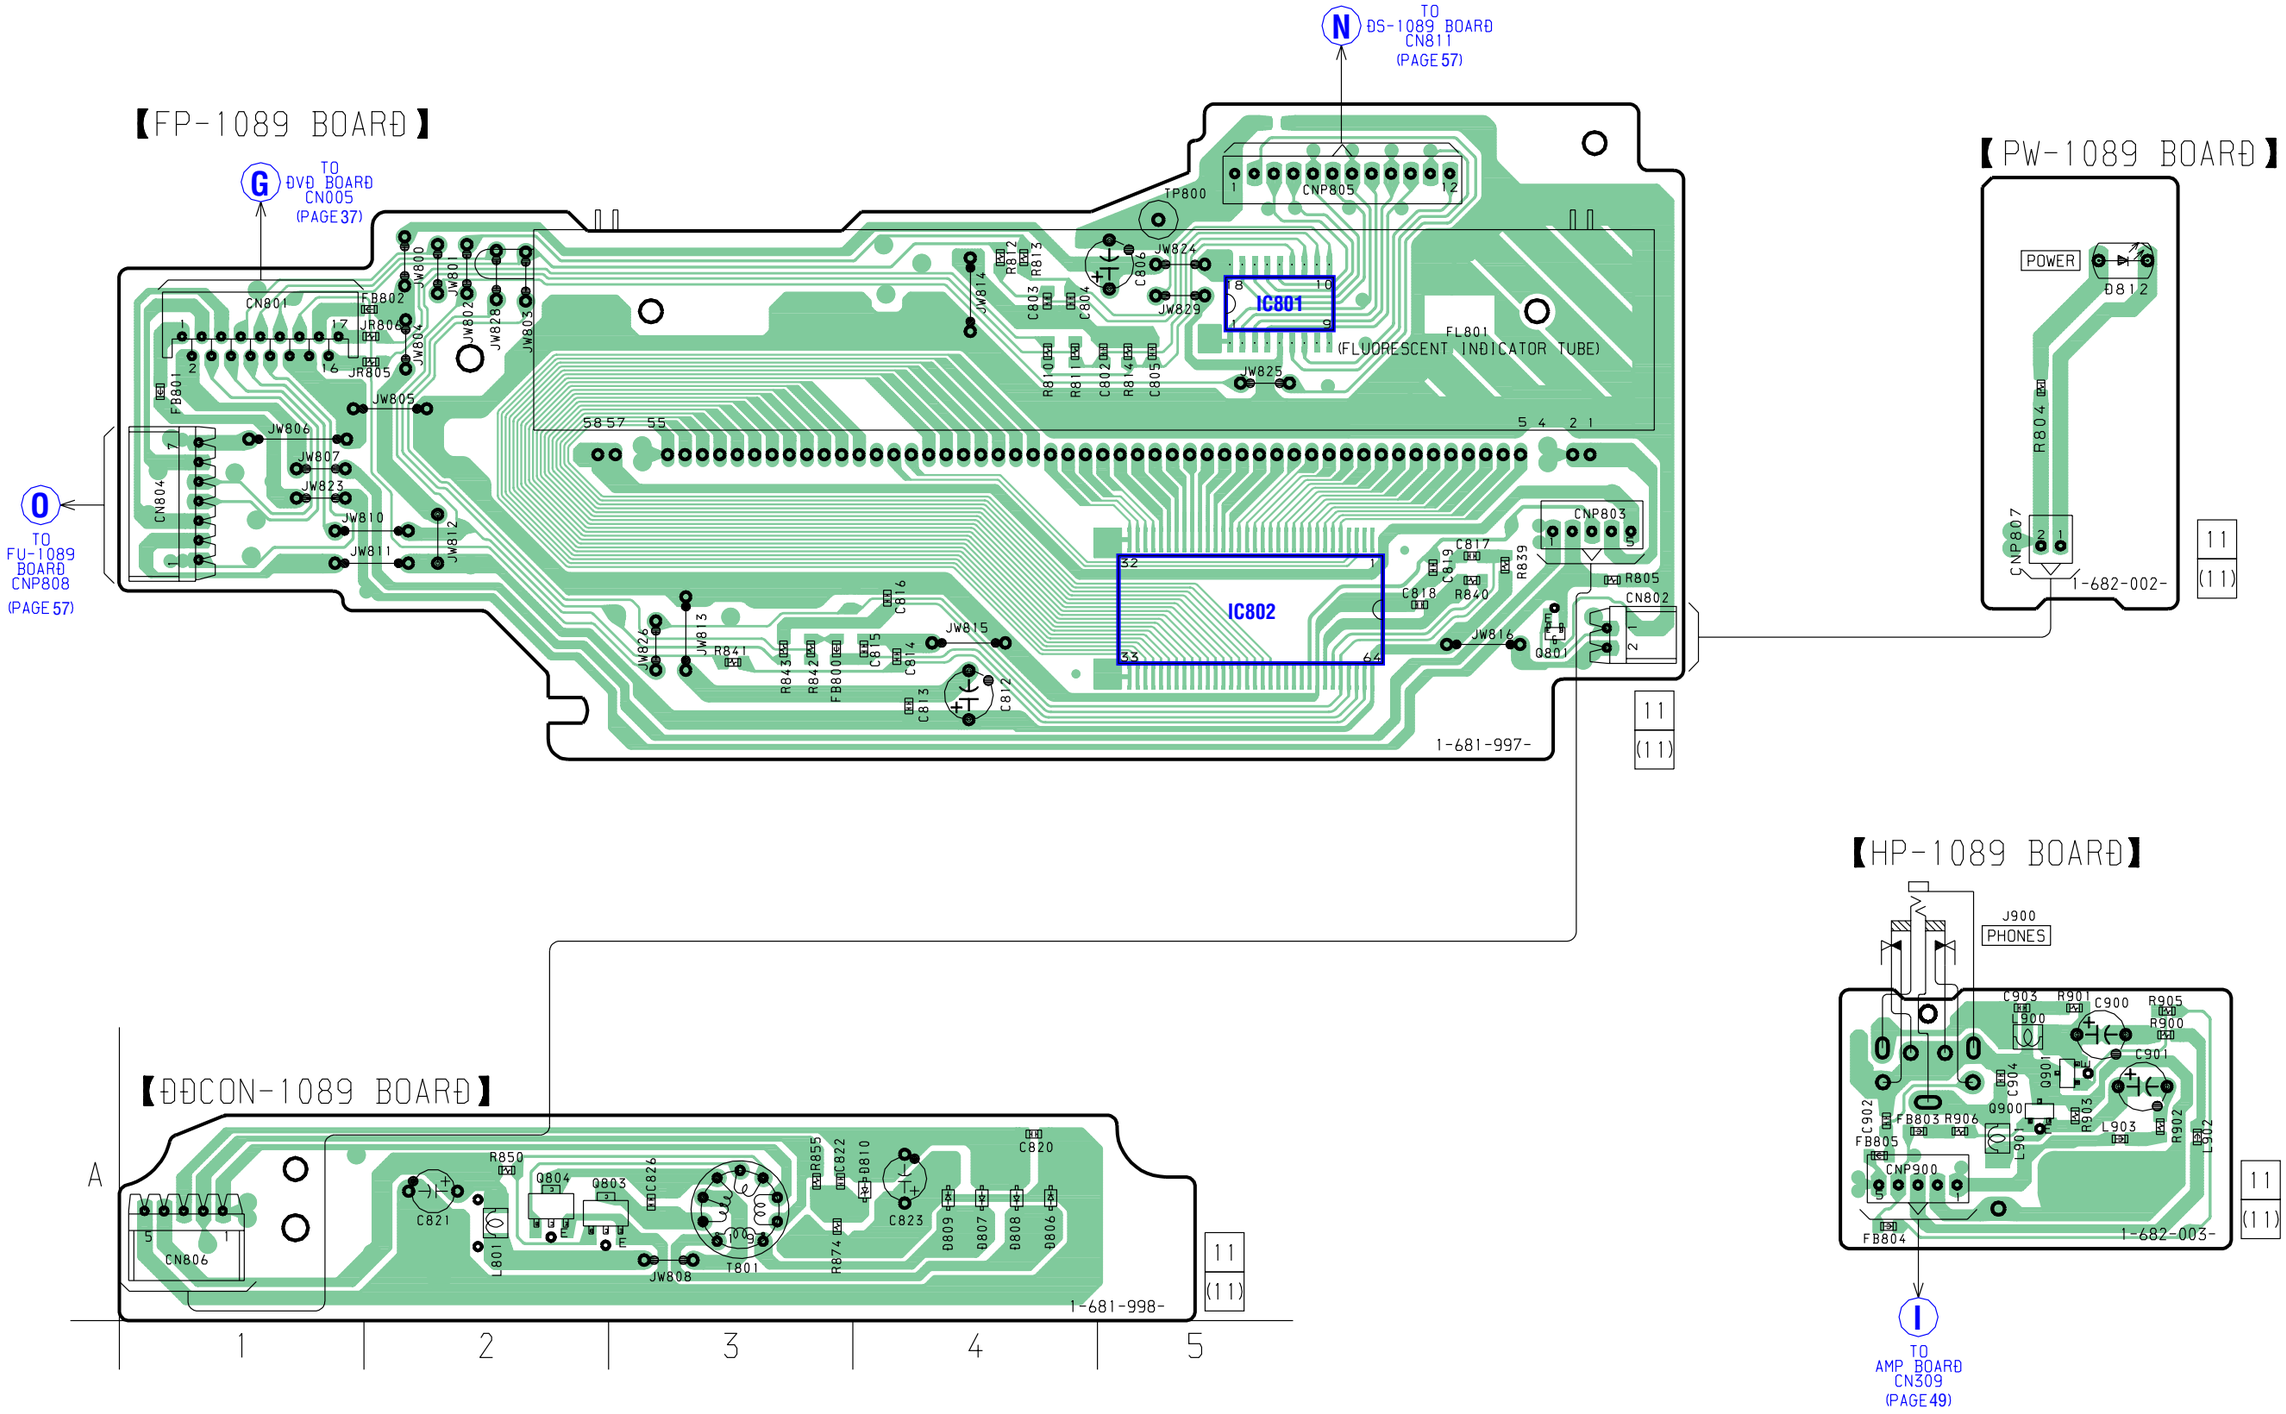

- **Semiconductor Location**

Ref. No.	Location
D806	A-4
D807	A-4
D808	A-4
D809	A-4
D810	A-4
Q803	A-2
Q804	A-2

5-23. SCHEMATIC DIAGRAM – FRONT SECTION – • See page 31 for Waveforms. • See page 64 for IC Block Diagrams.

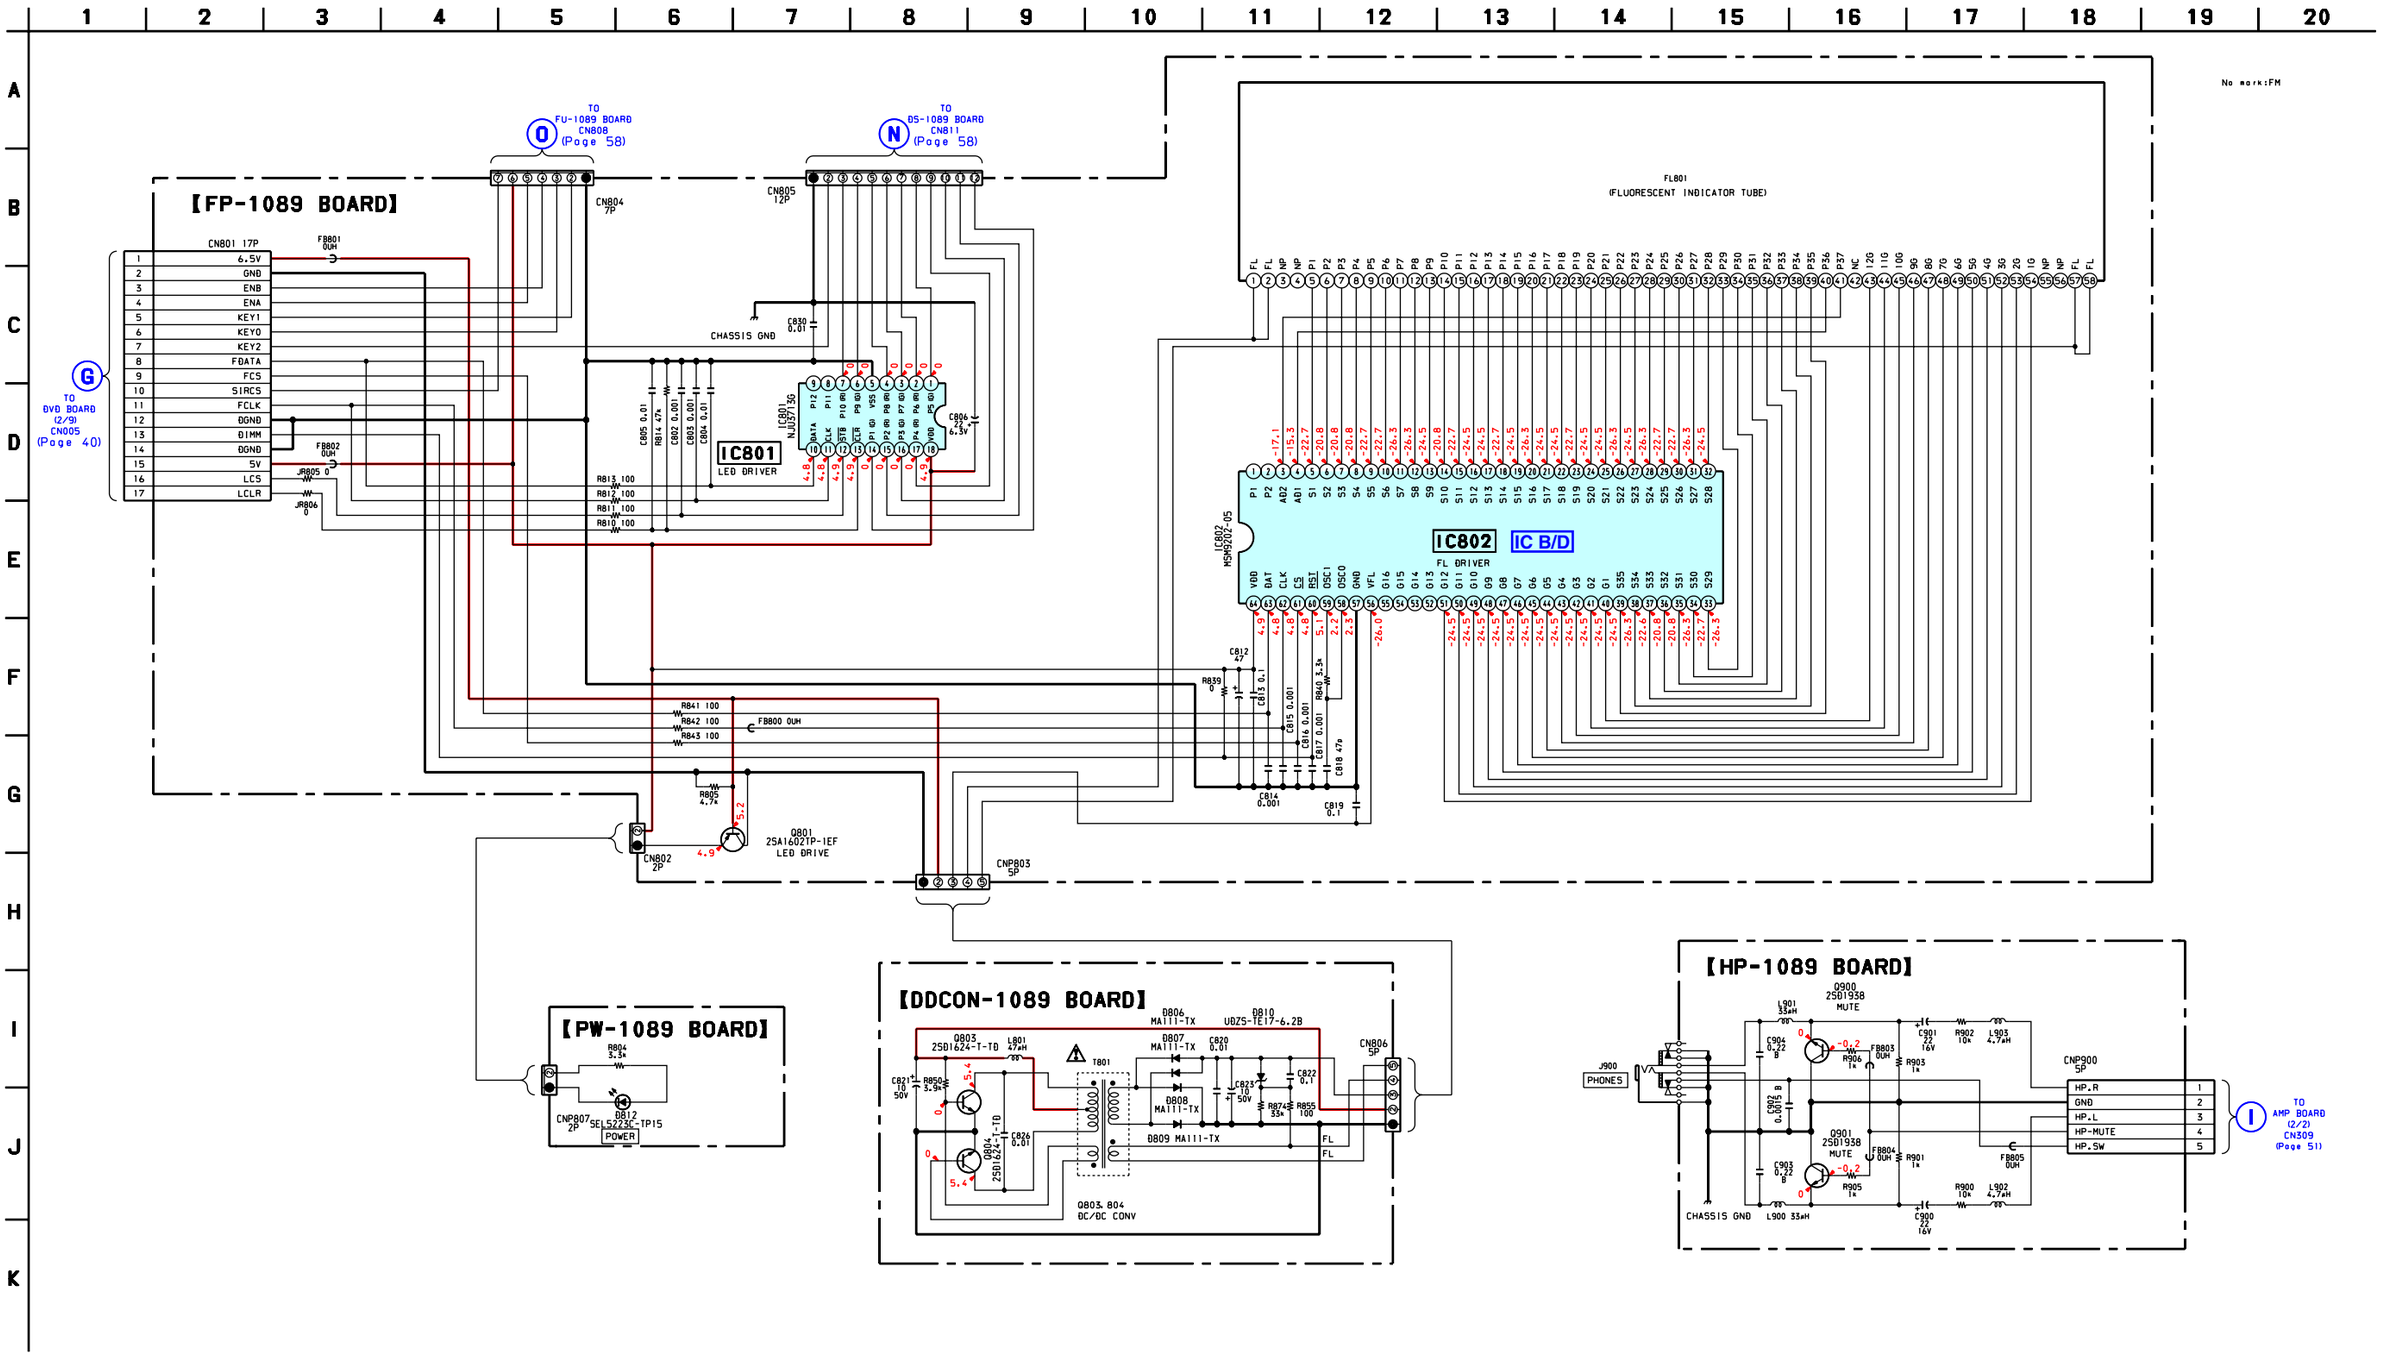

5-24. PRINTED WIRING BOARD – SW SECTION – • See page 30 for Circuit Boards Location.

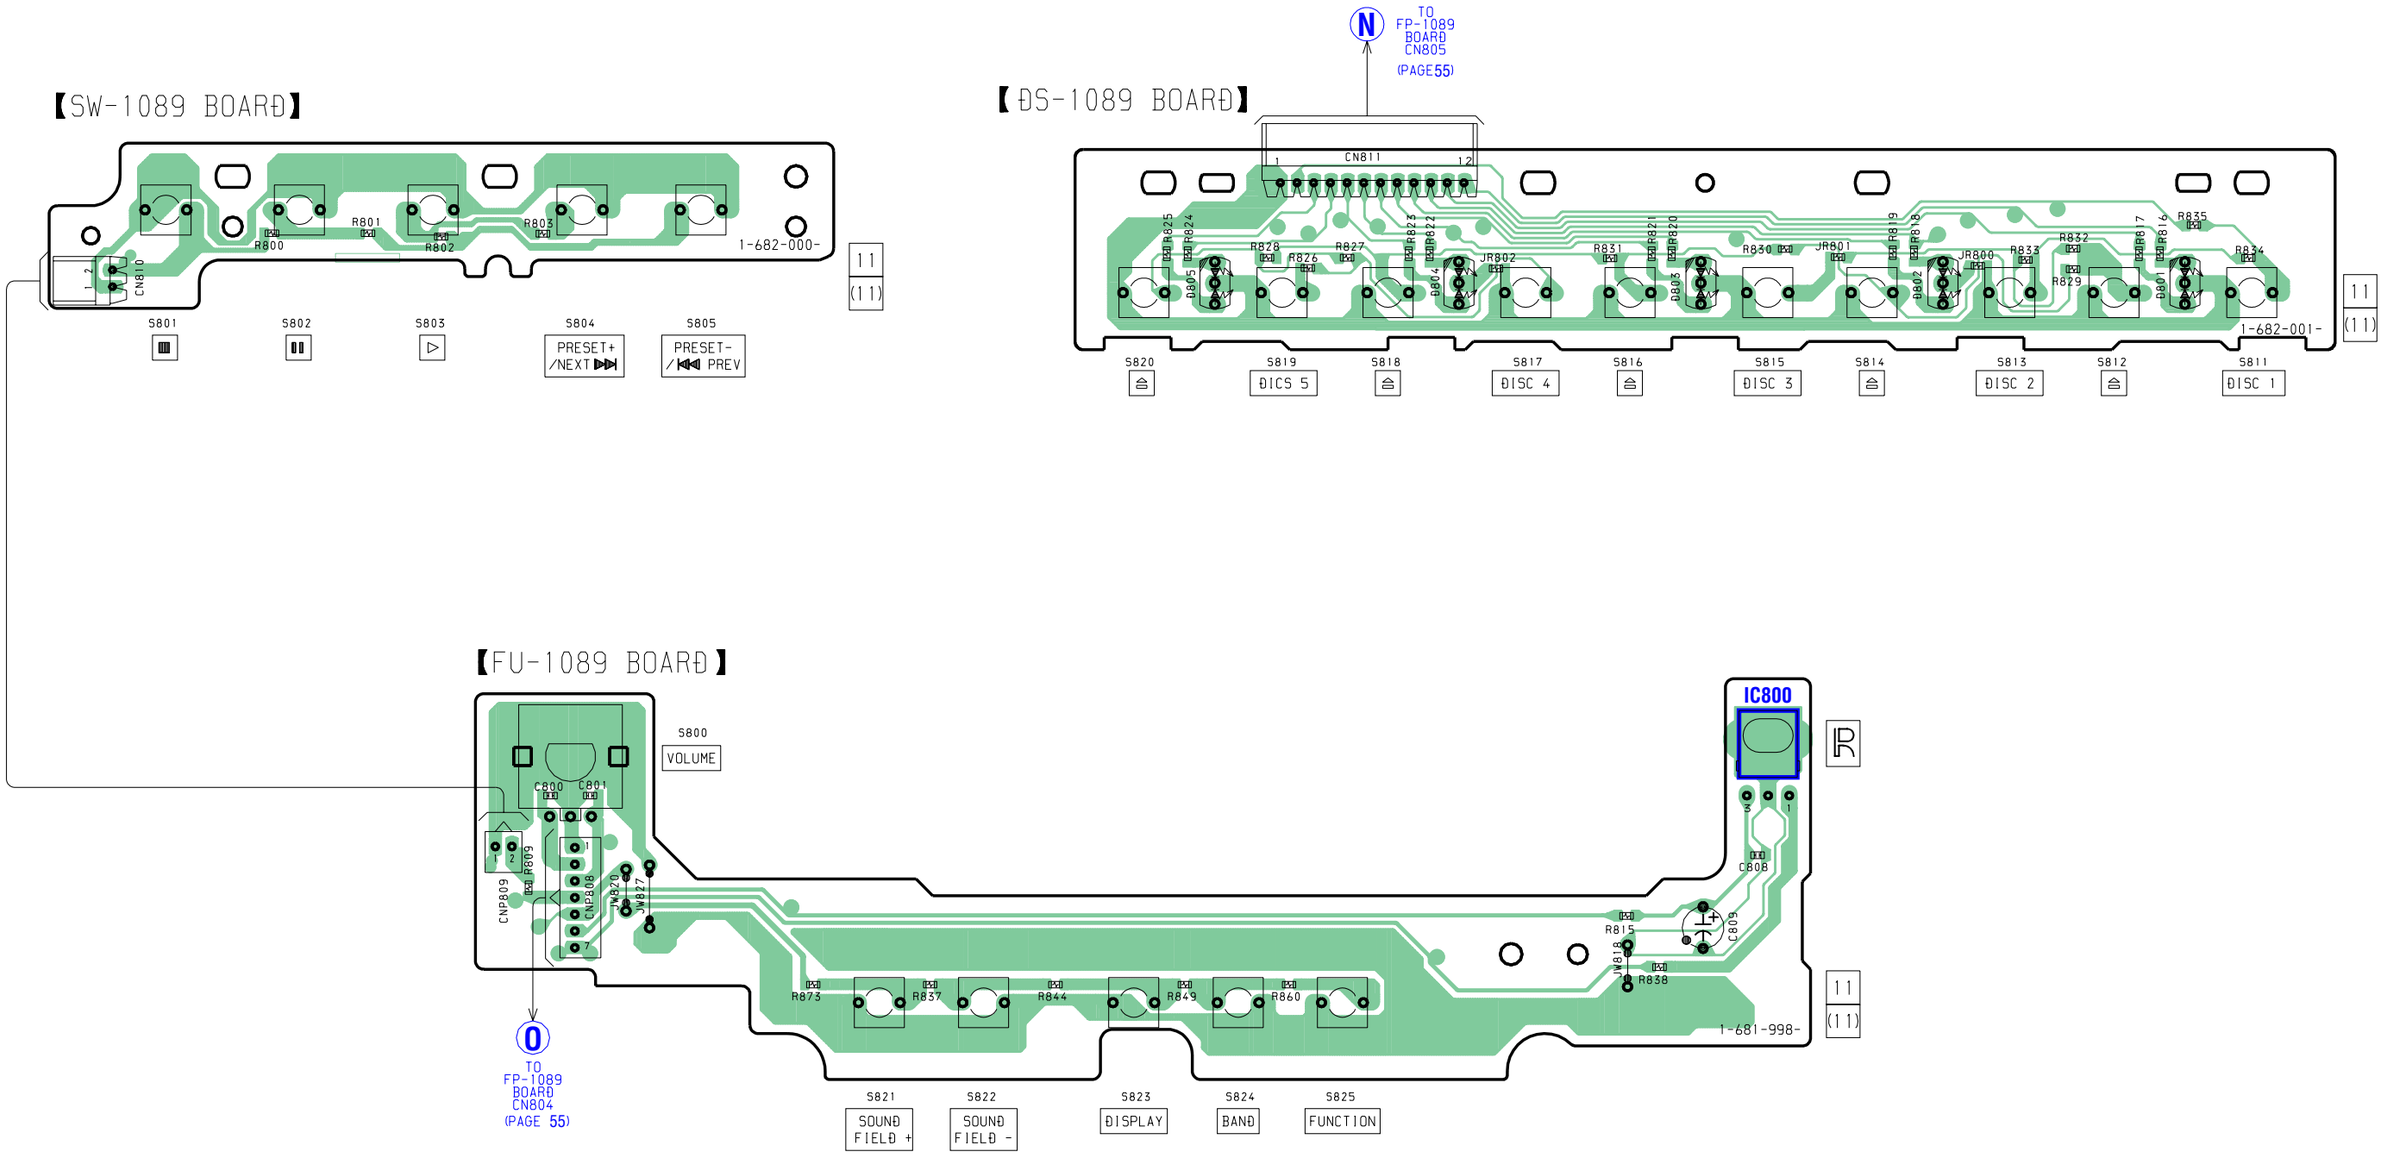

5-25. SCHEMATIC DIAGRAM – SW SECTION –

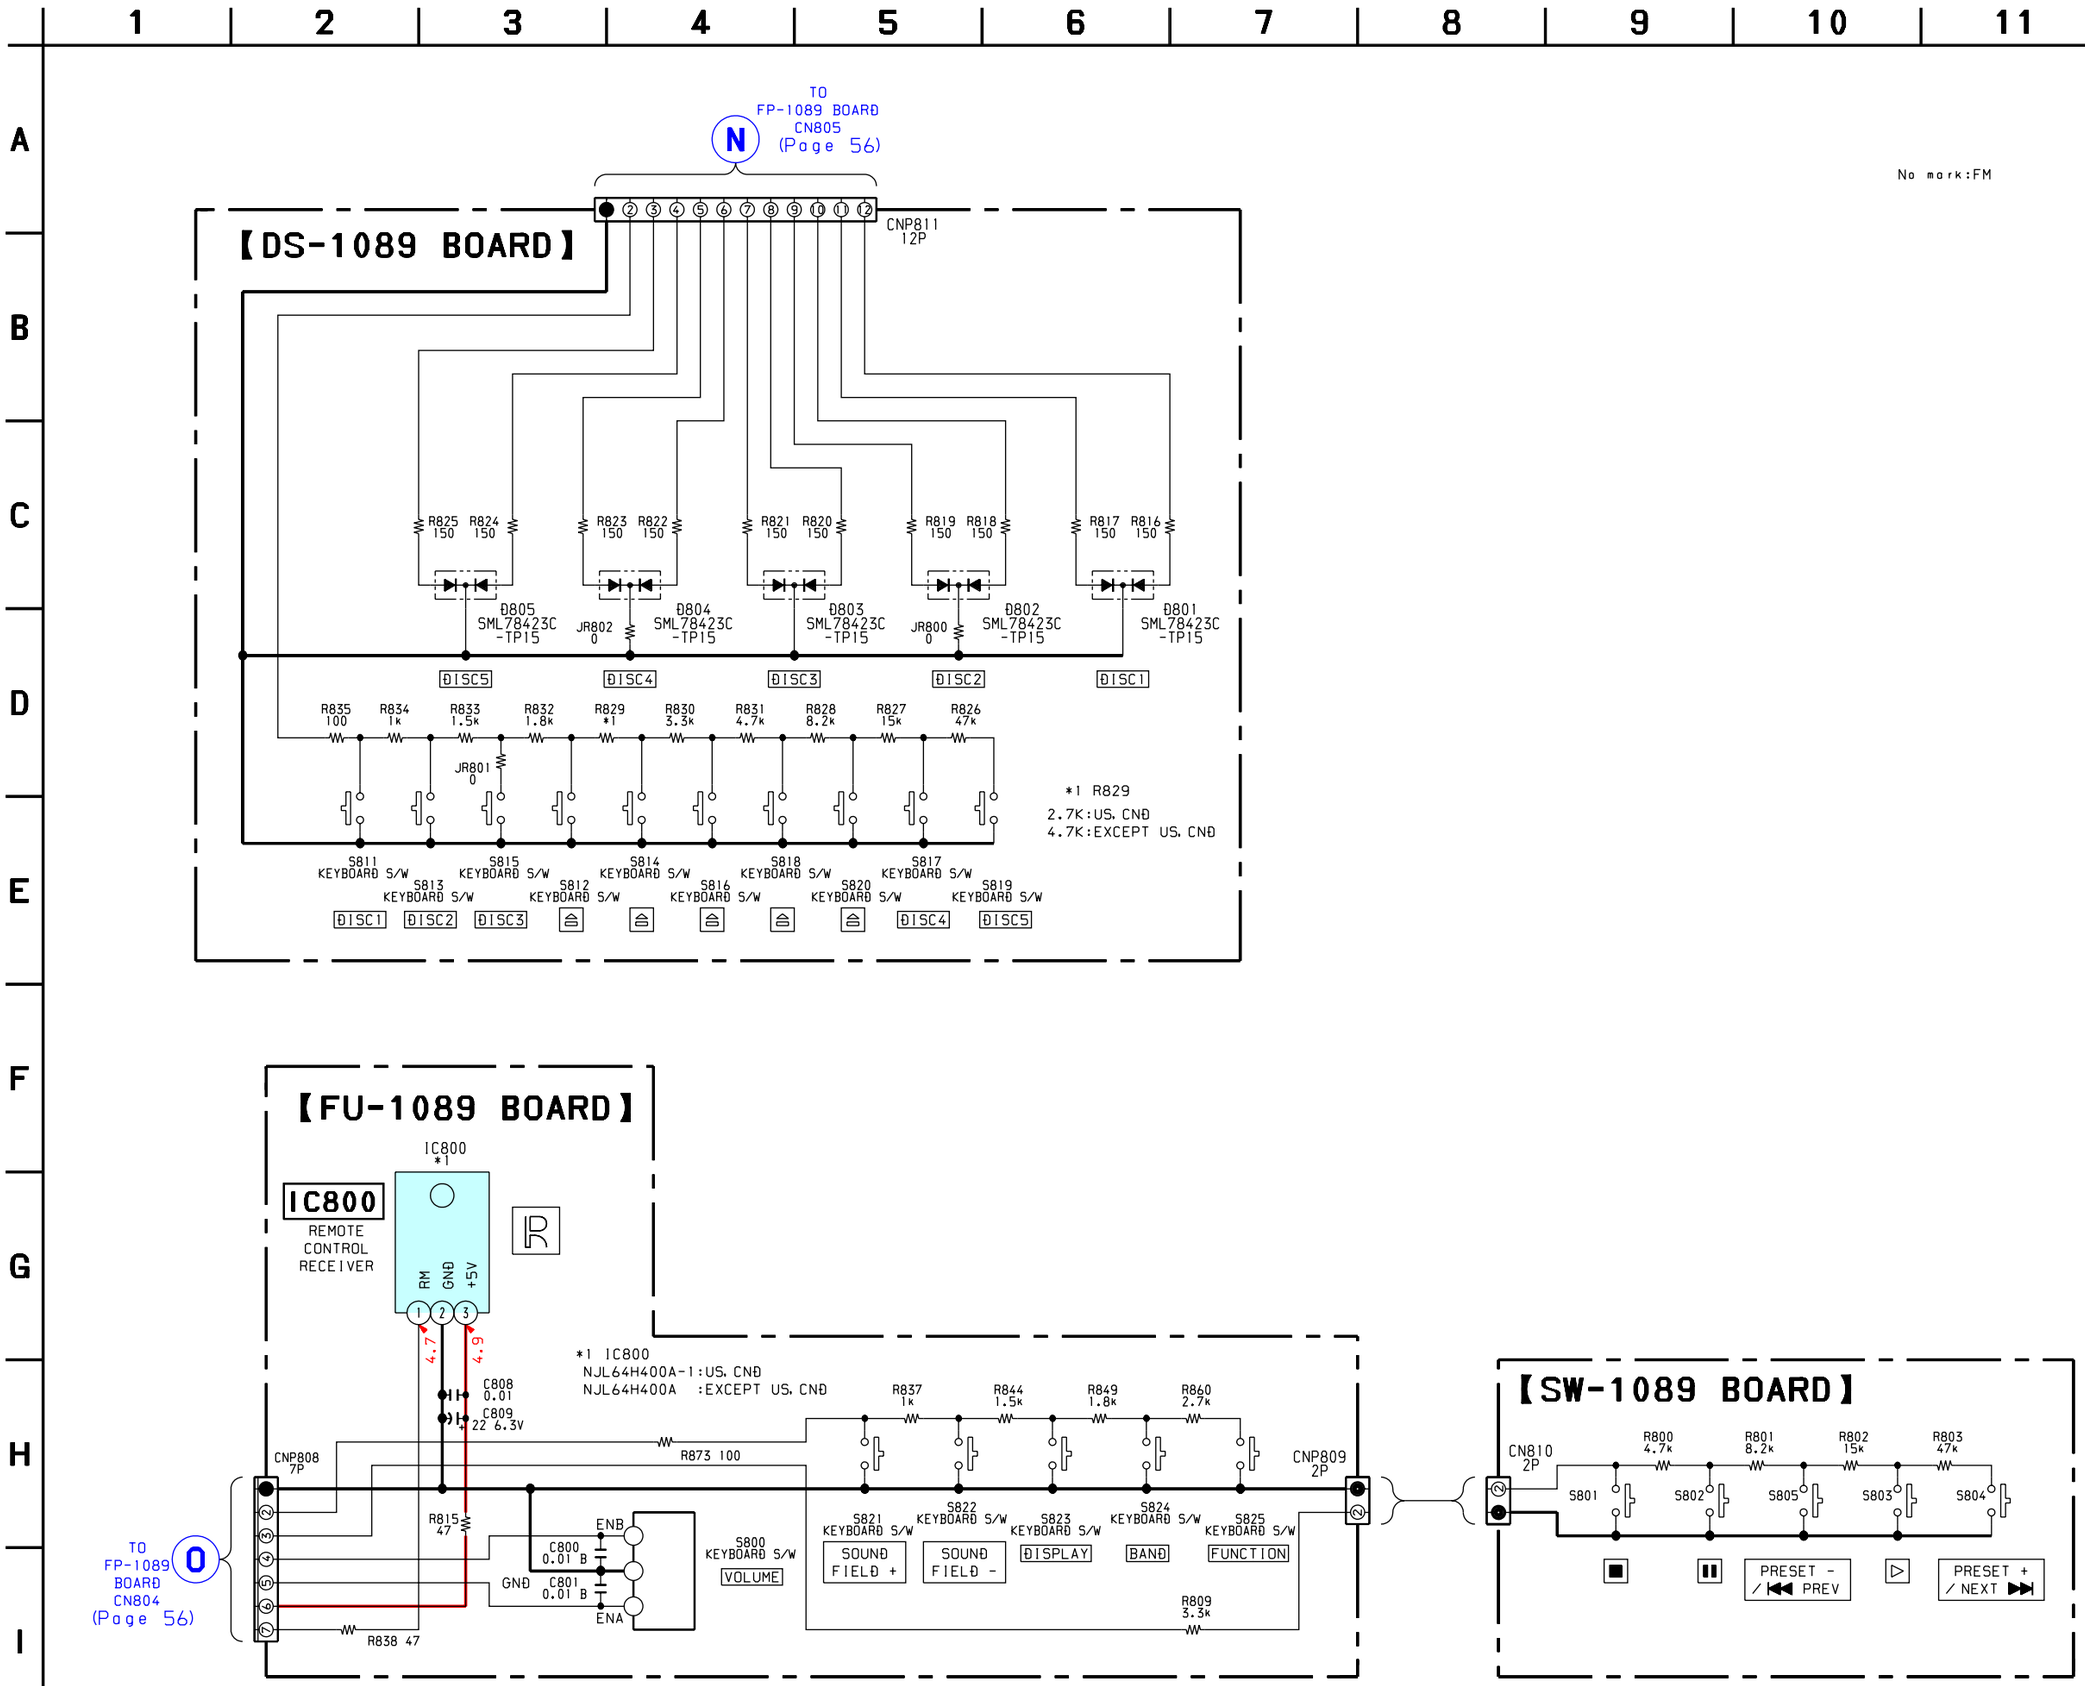

5-26. PRINTED WIRING BOARD – CDM SECTION – • See page 30 for Circuit Boards Location.

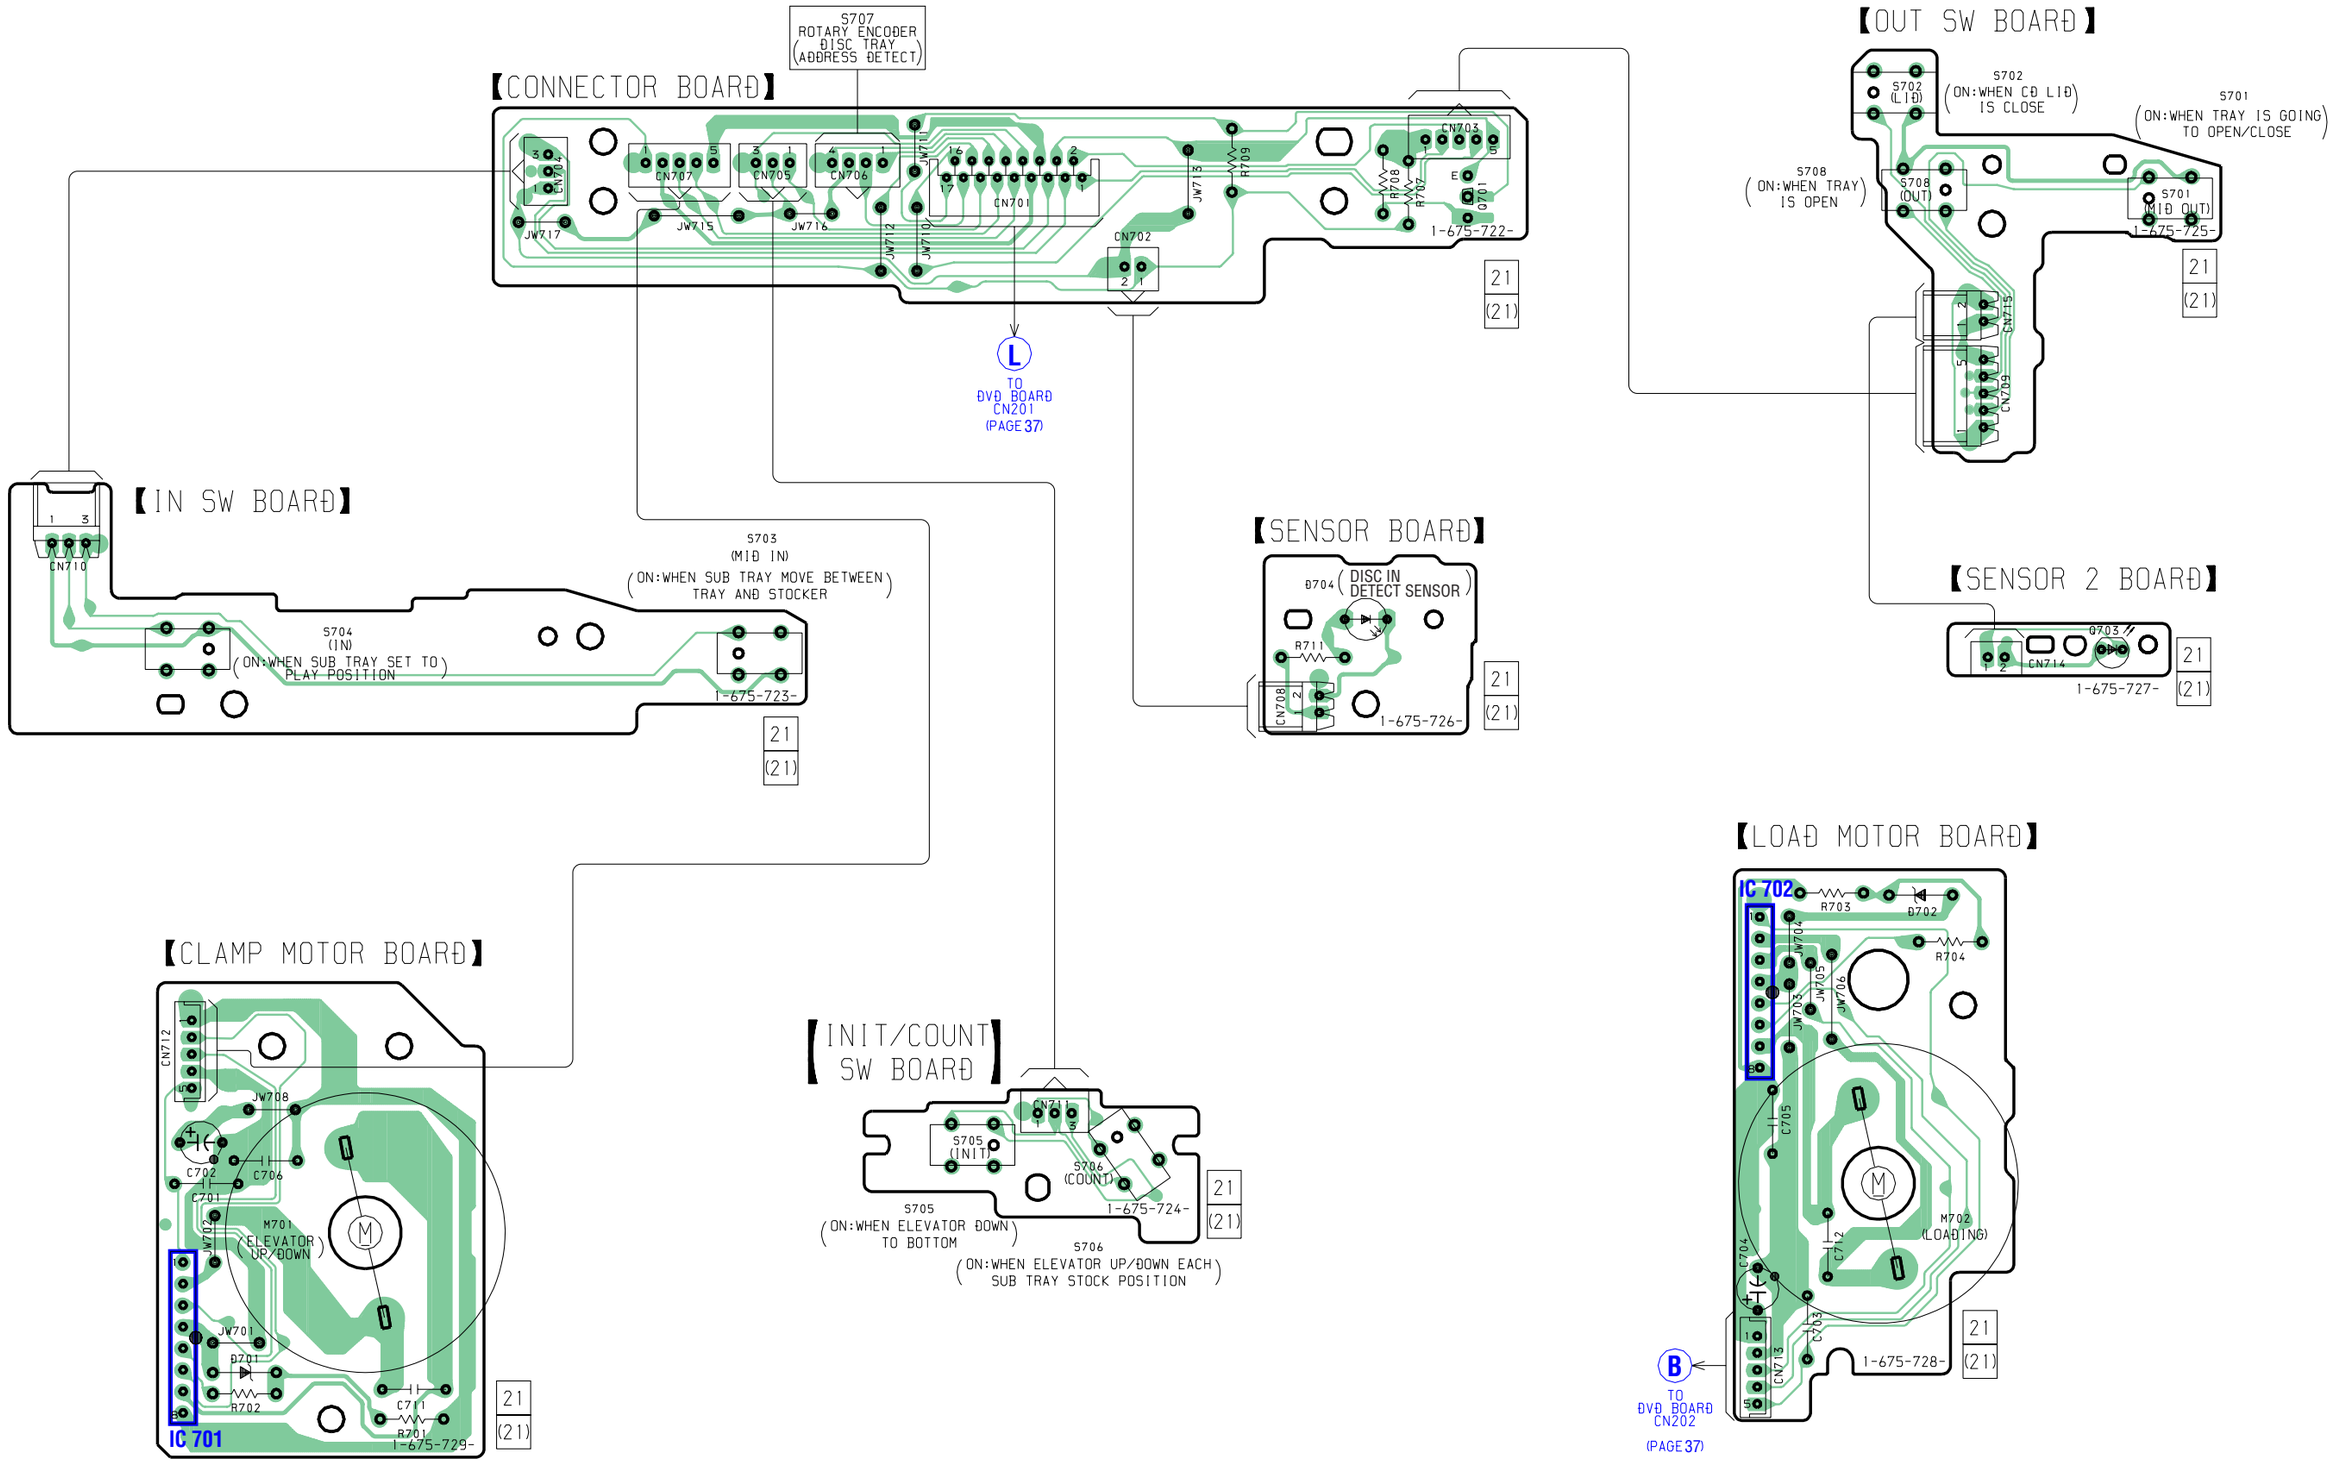

5-27. SCHEMATIC DIAGRAM – CDM SECTION –

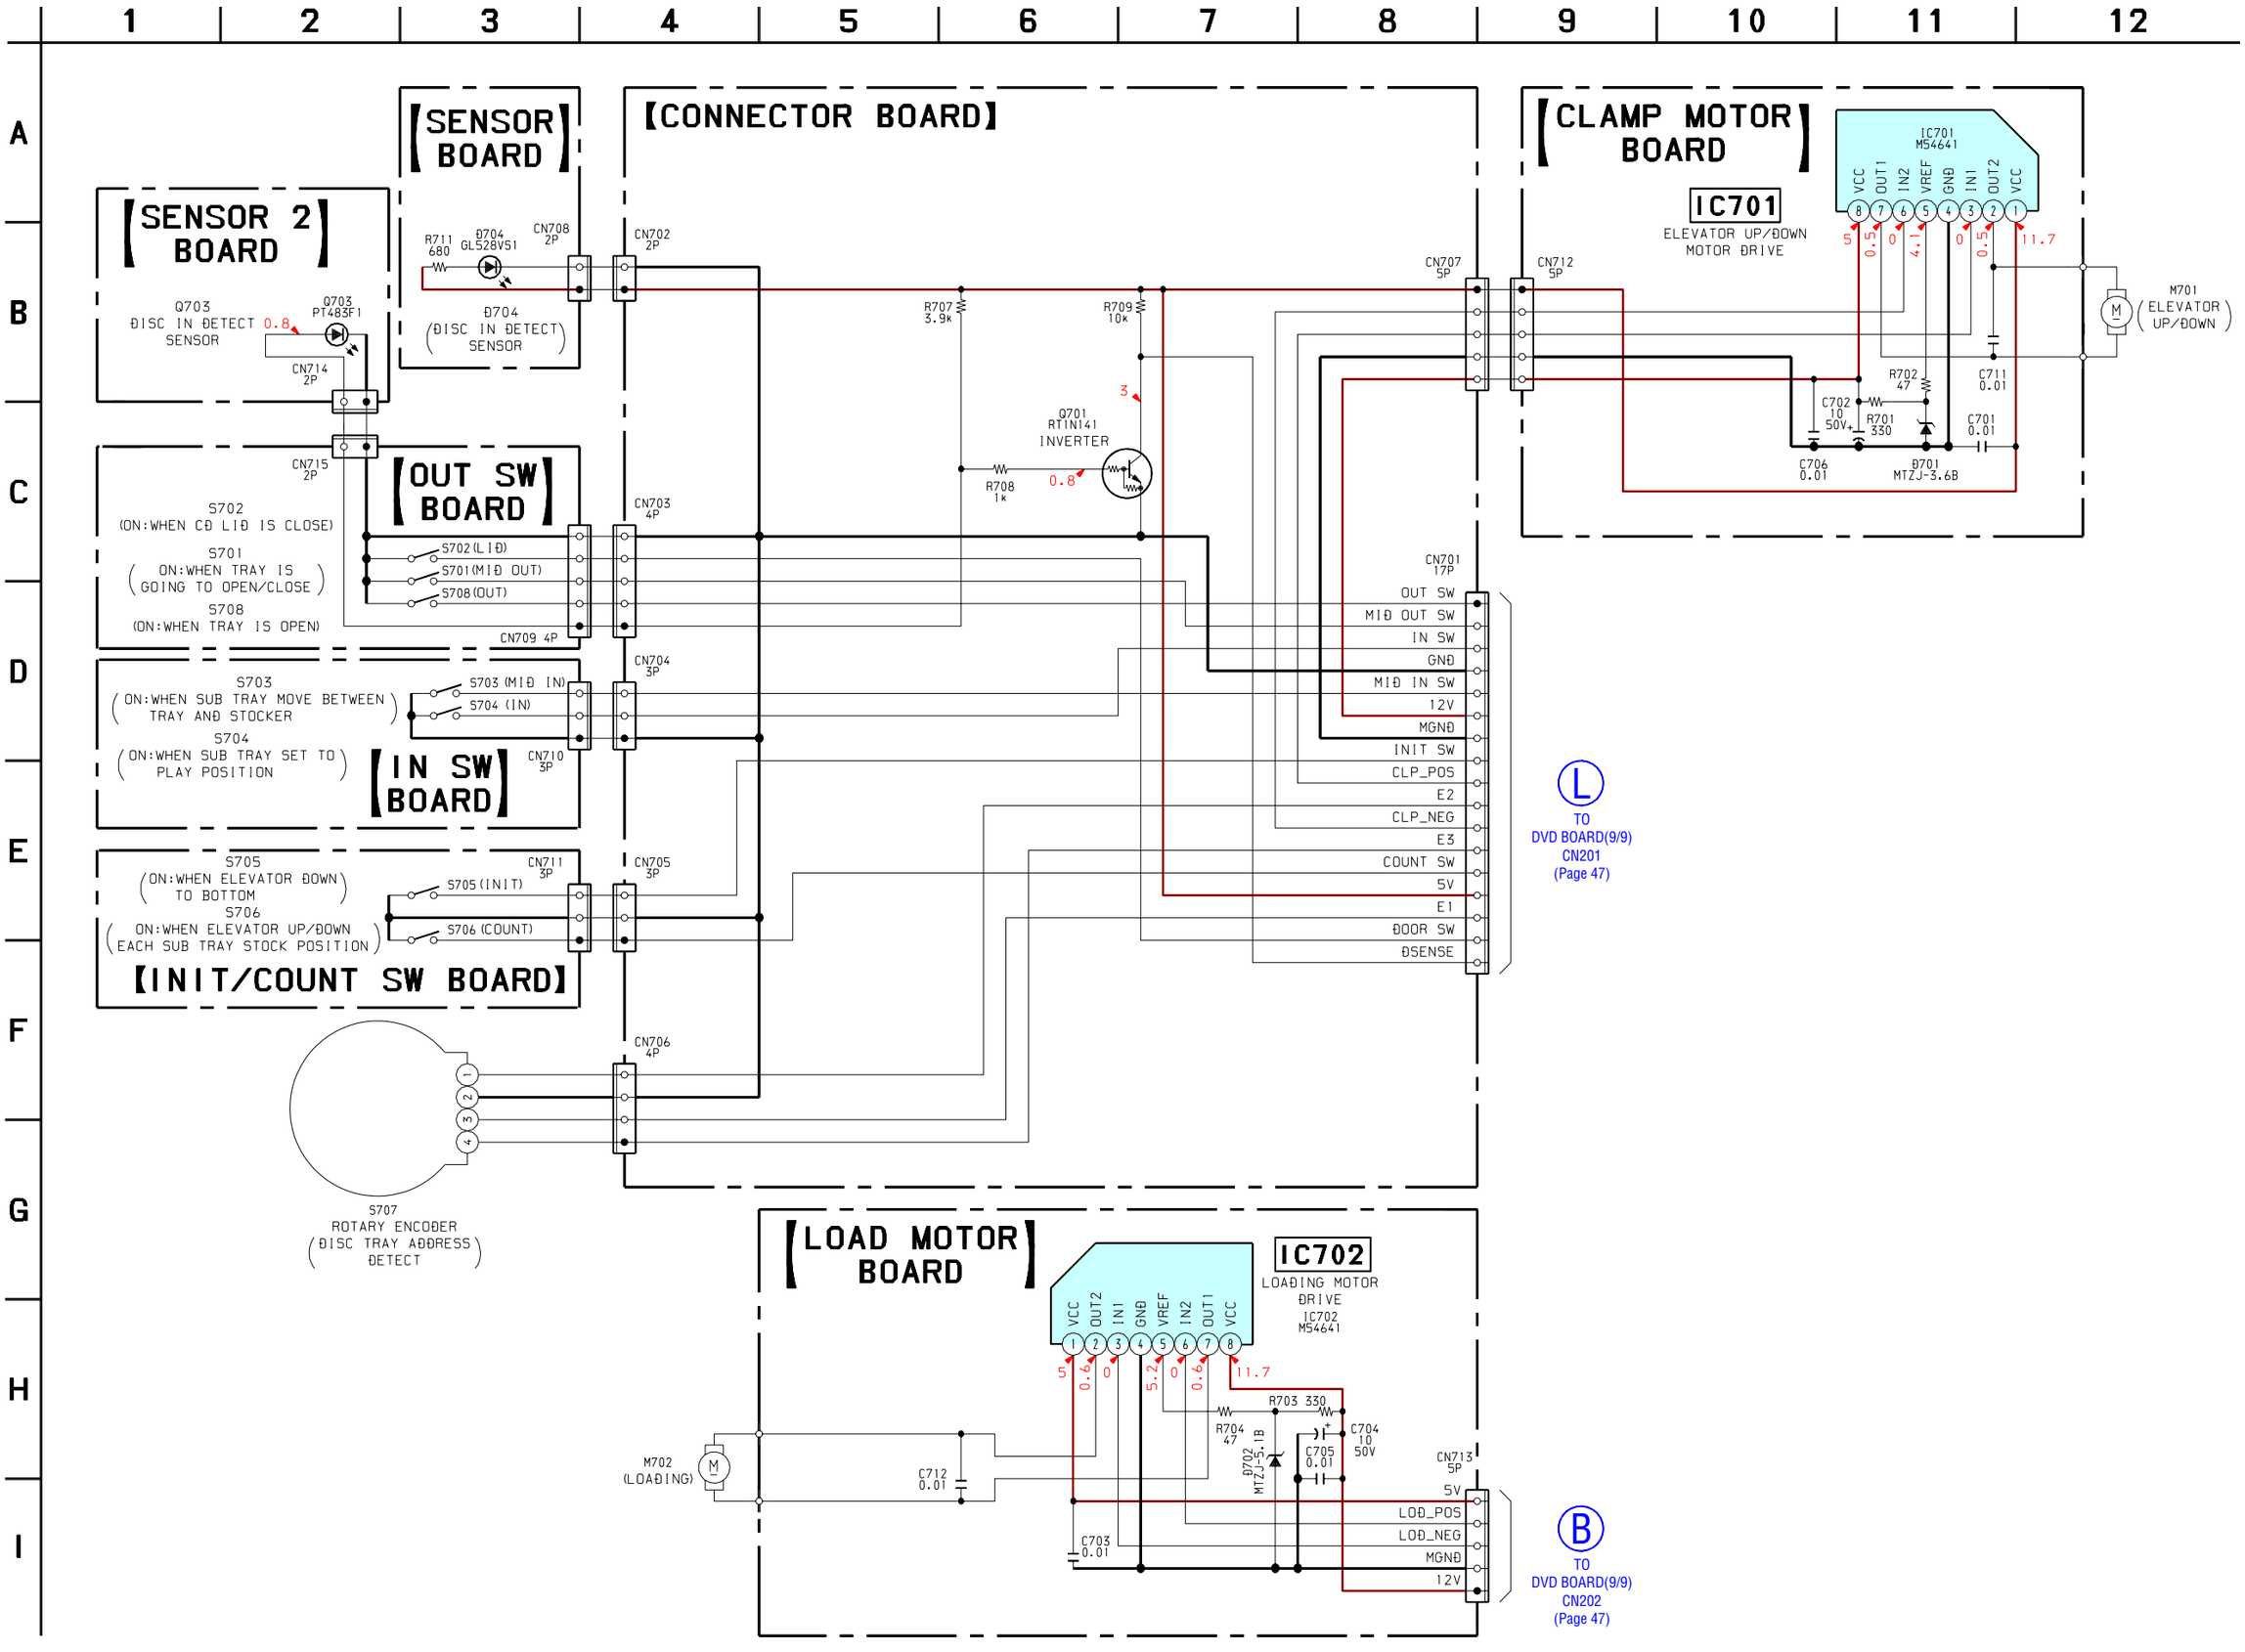

5-28. PRINTED WIRING BOARD – POWER SECTION (SIDE A) – • See page 30 for Circuit Boards Location.

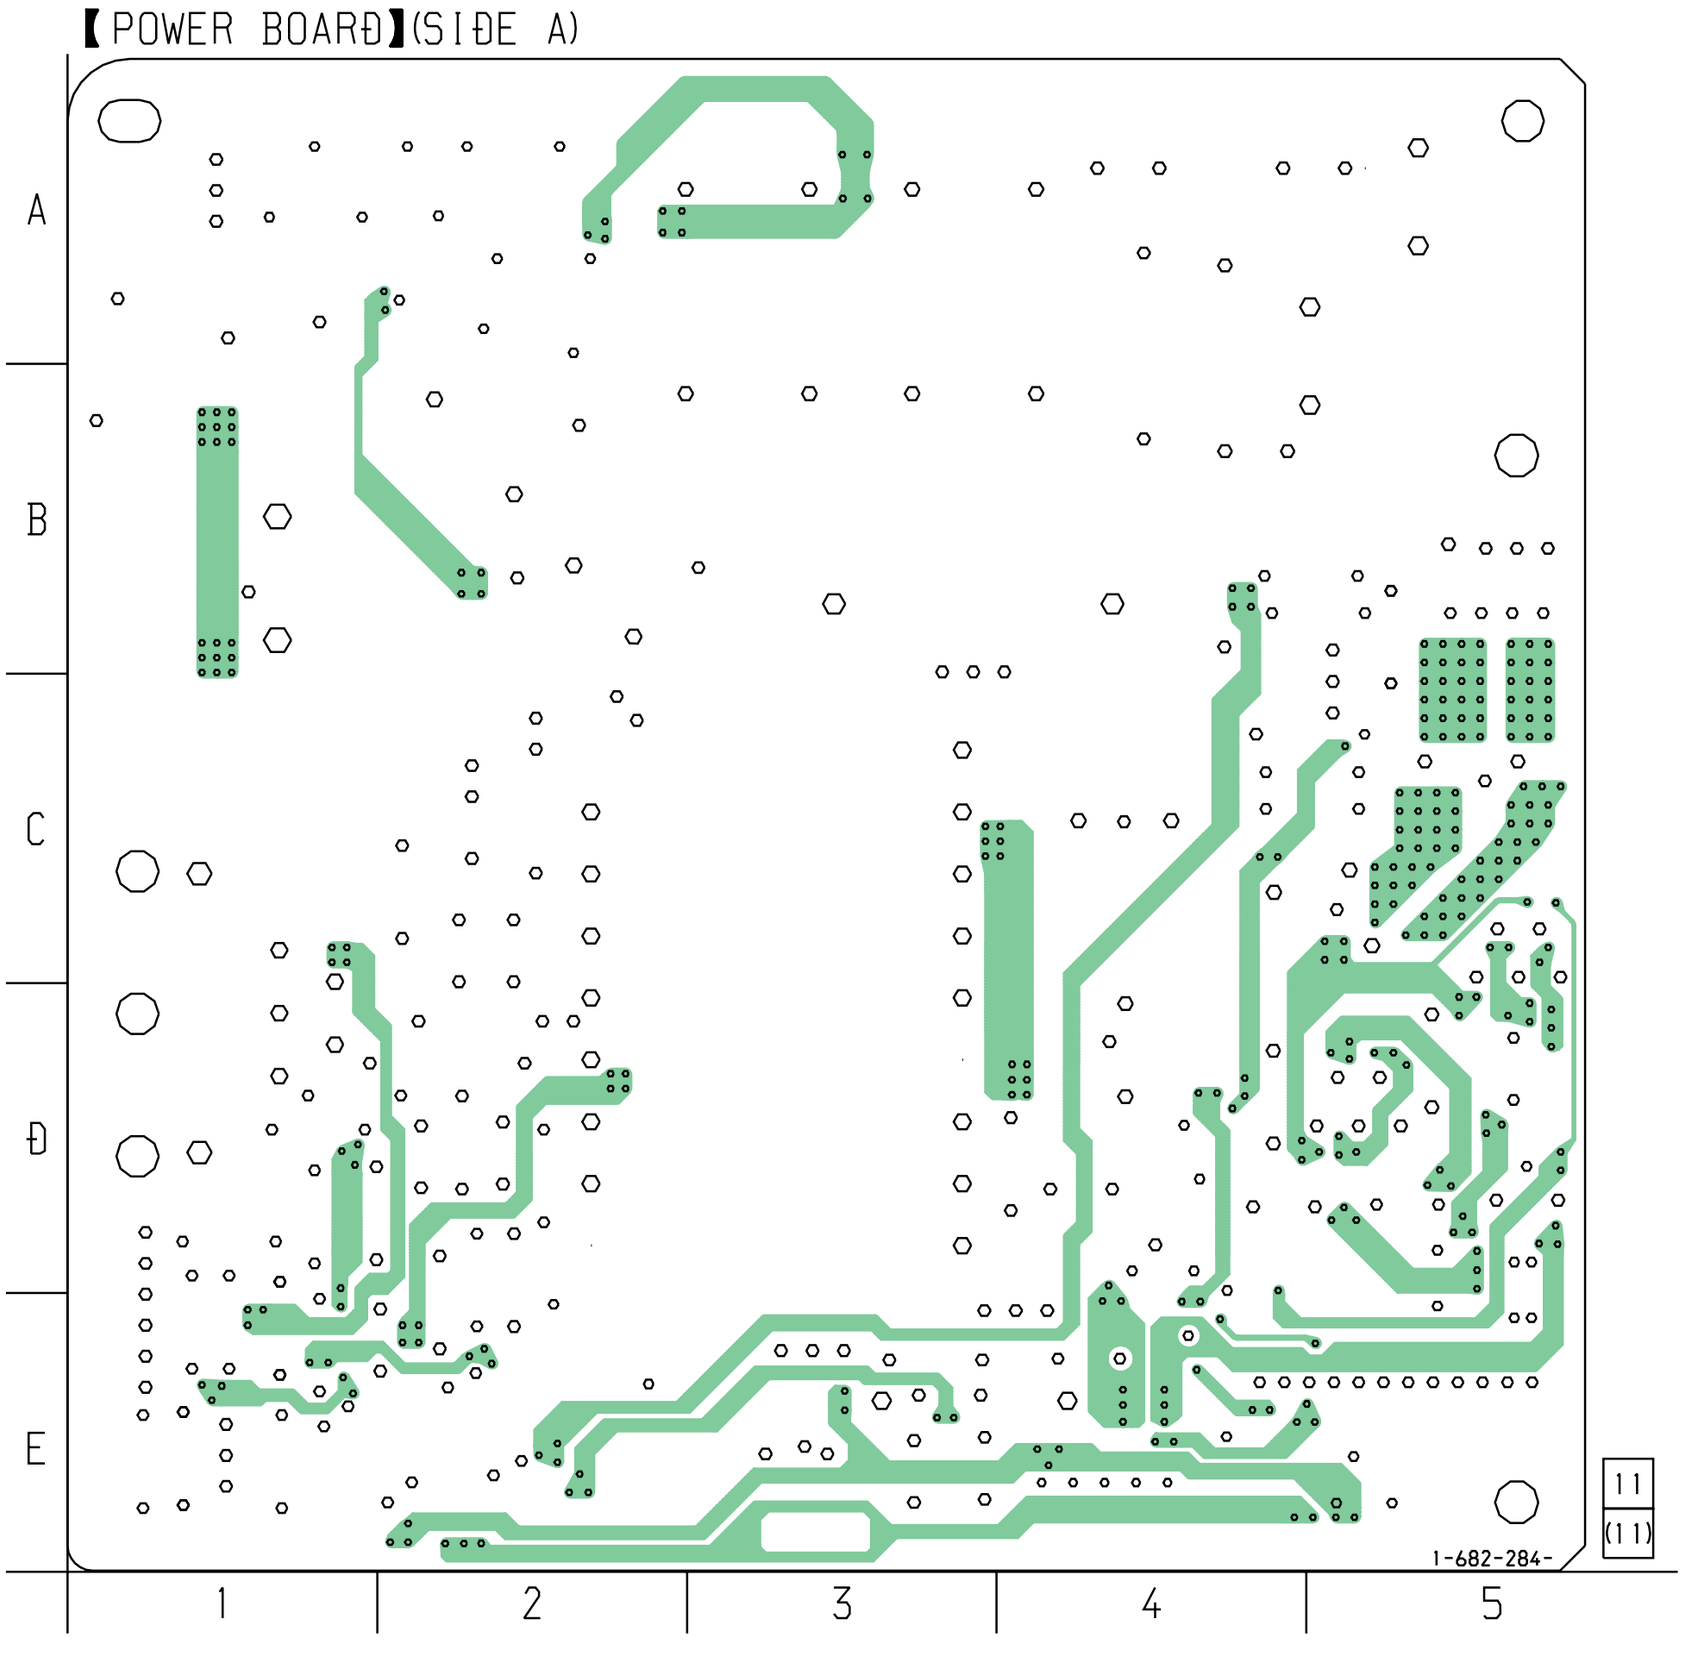

5-29. PRINTED WIRING BOARD – POWER SECTION (SIDE B) – • See page 30 for Circuit Boards Location.

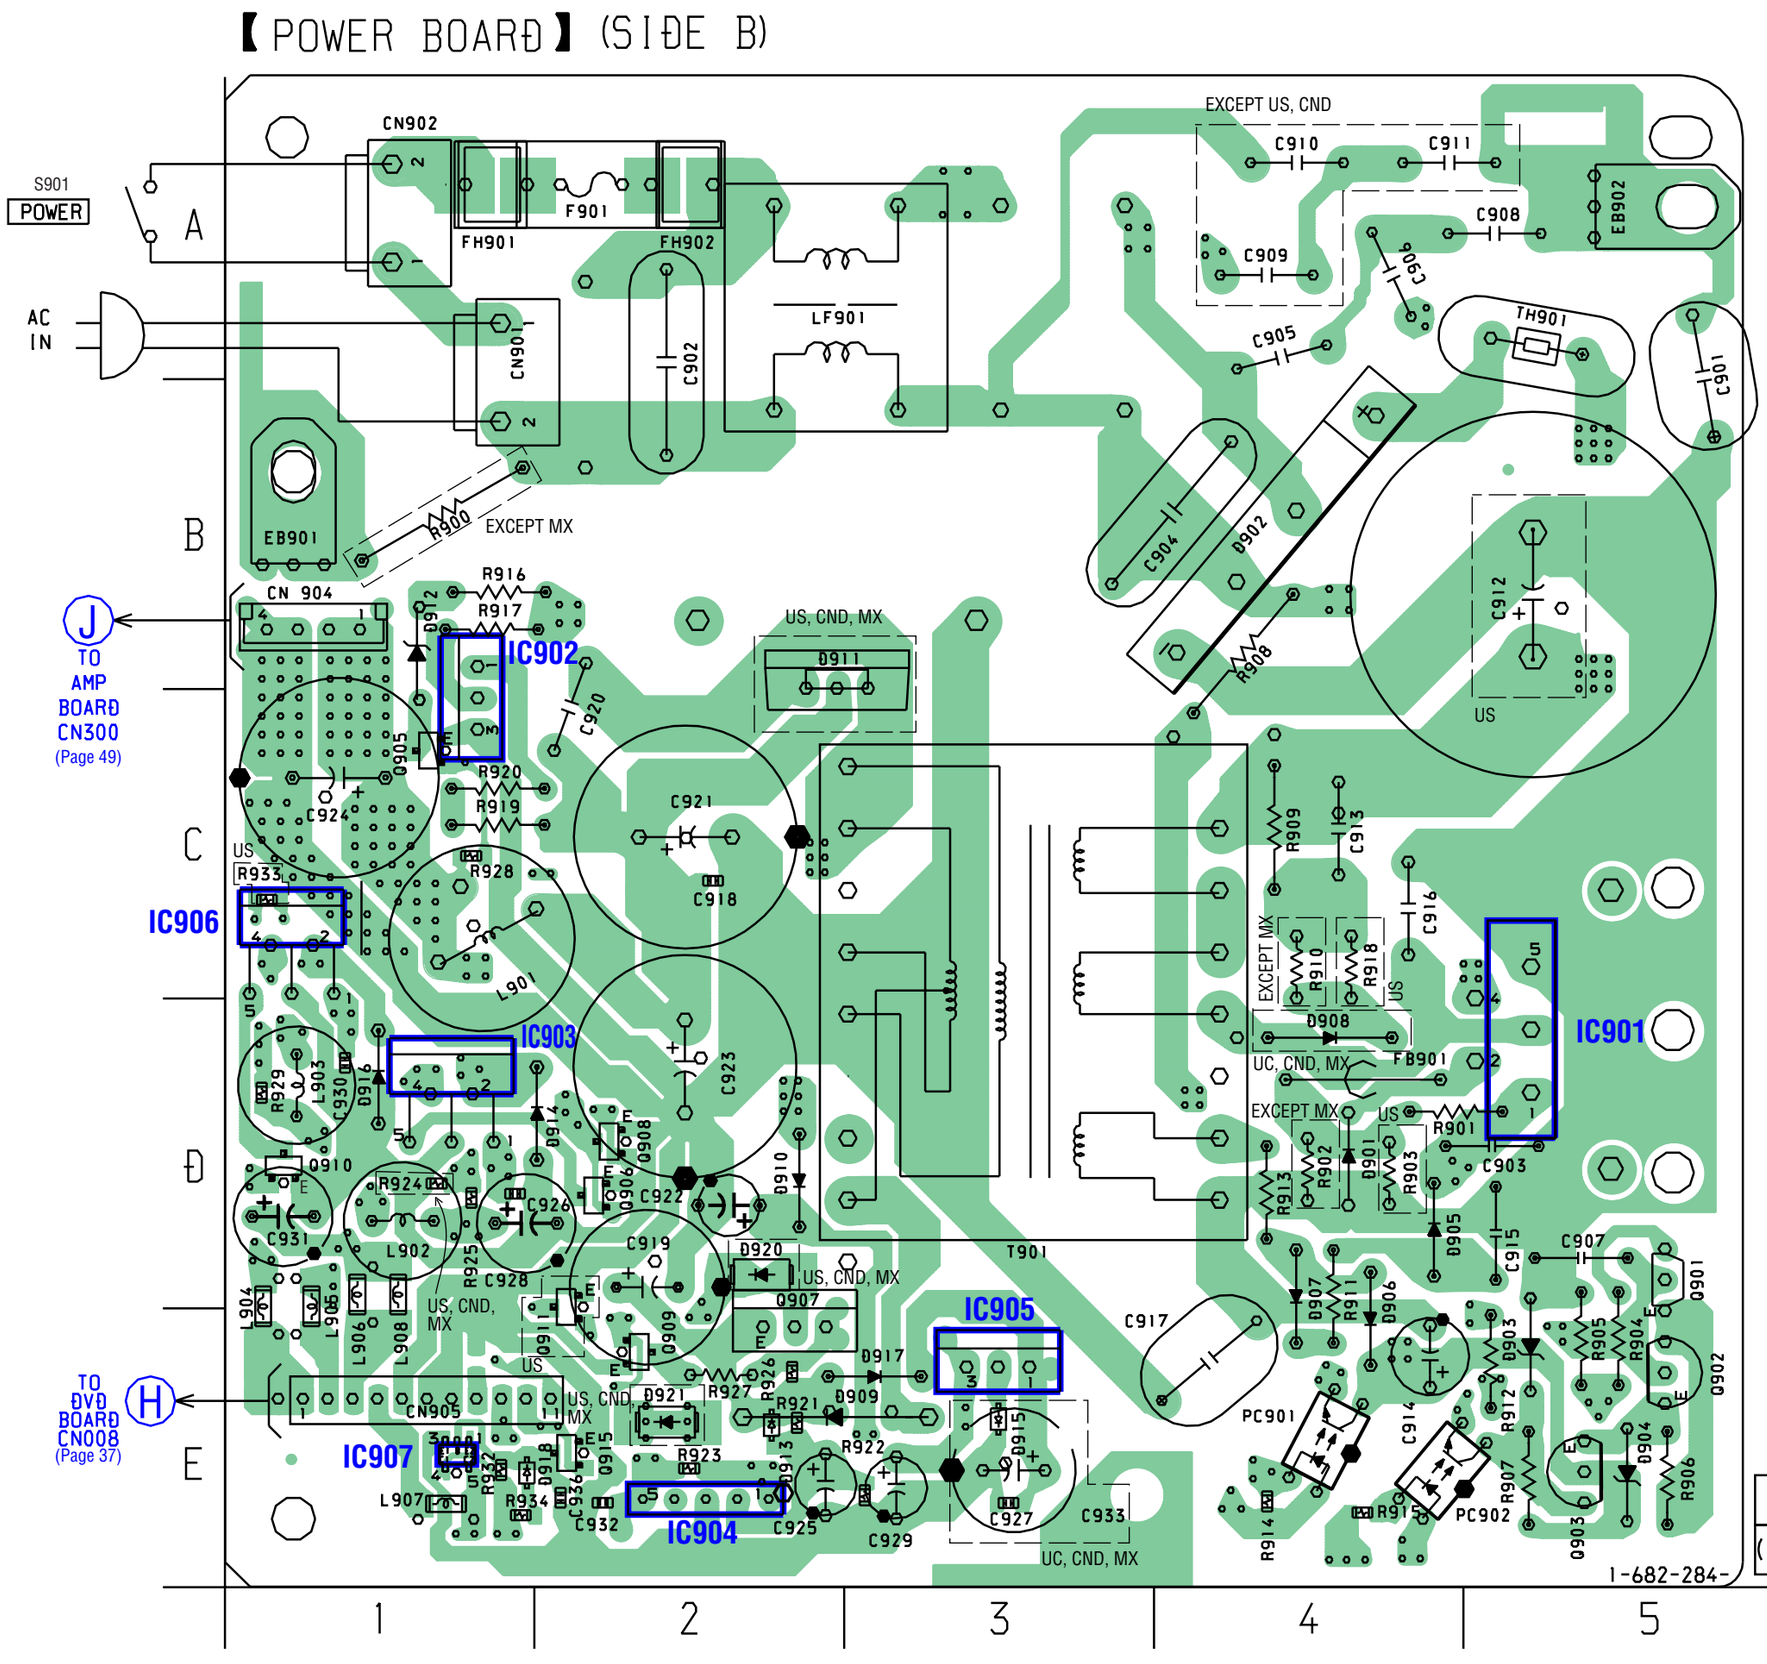

• **Semiconductor Location**

Ref. No.	Location
D901	D-4
D902	B-4
D903	E-5
D904	E-5
D905	D-4
D906	D-4
D907	D-4
D908	D-4
D909	E-2
D910	D-2
D911	B-2
D912	B-1
D913	E-2
D914	D-2
D915	E-3
D916	D-1
D917	E-3
D918	E-1
D920	D-2
D921	E-2
IC901	D-5
IC902	B-1
IC903	D-1
IC904	E-2
IC905	E-3
IC906	C-1
IC907	E-1
Q901	D-5
Q902	E-5
Q903	E-5
Q905	C-1
Q906	D-2
Q907	E-2
Q908	D-2
Q909	E-2
Q910	D-1
Q911	D-2
Q915	E-2

5-30. SCHEMATIC DIAGRAM – POWER SECTION – • See page 66 for IC Block Diagrams.

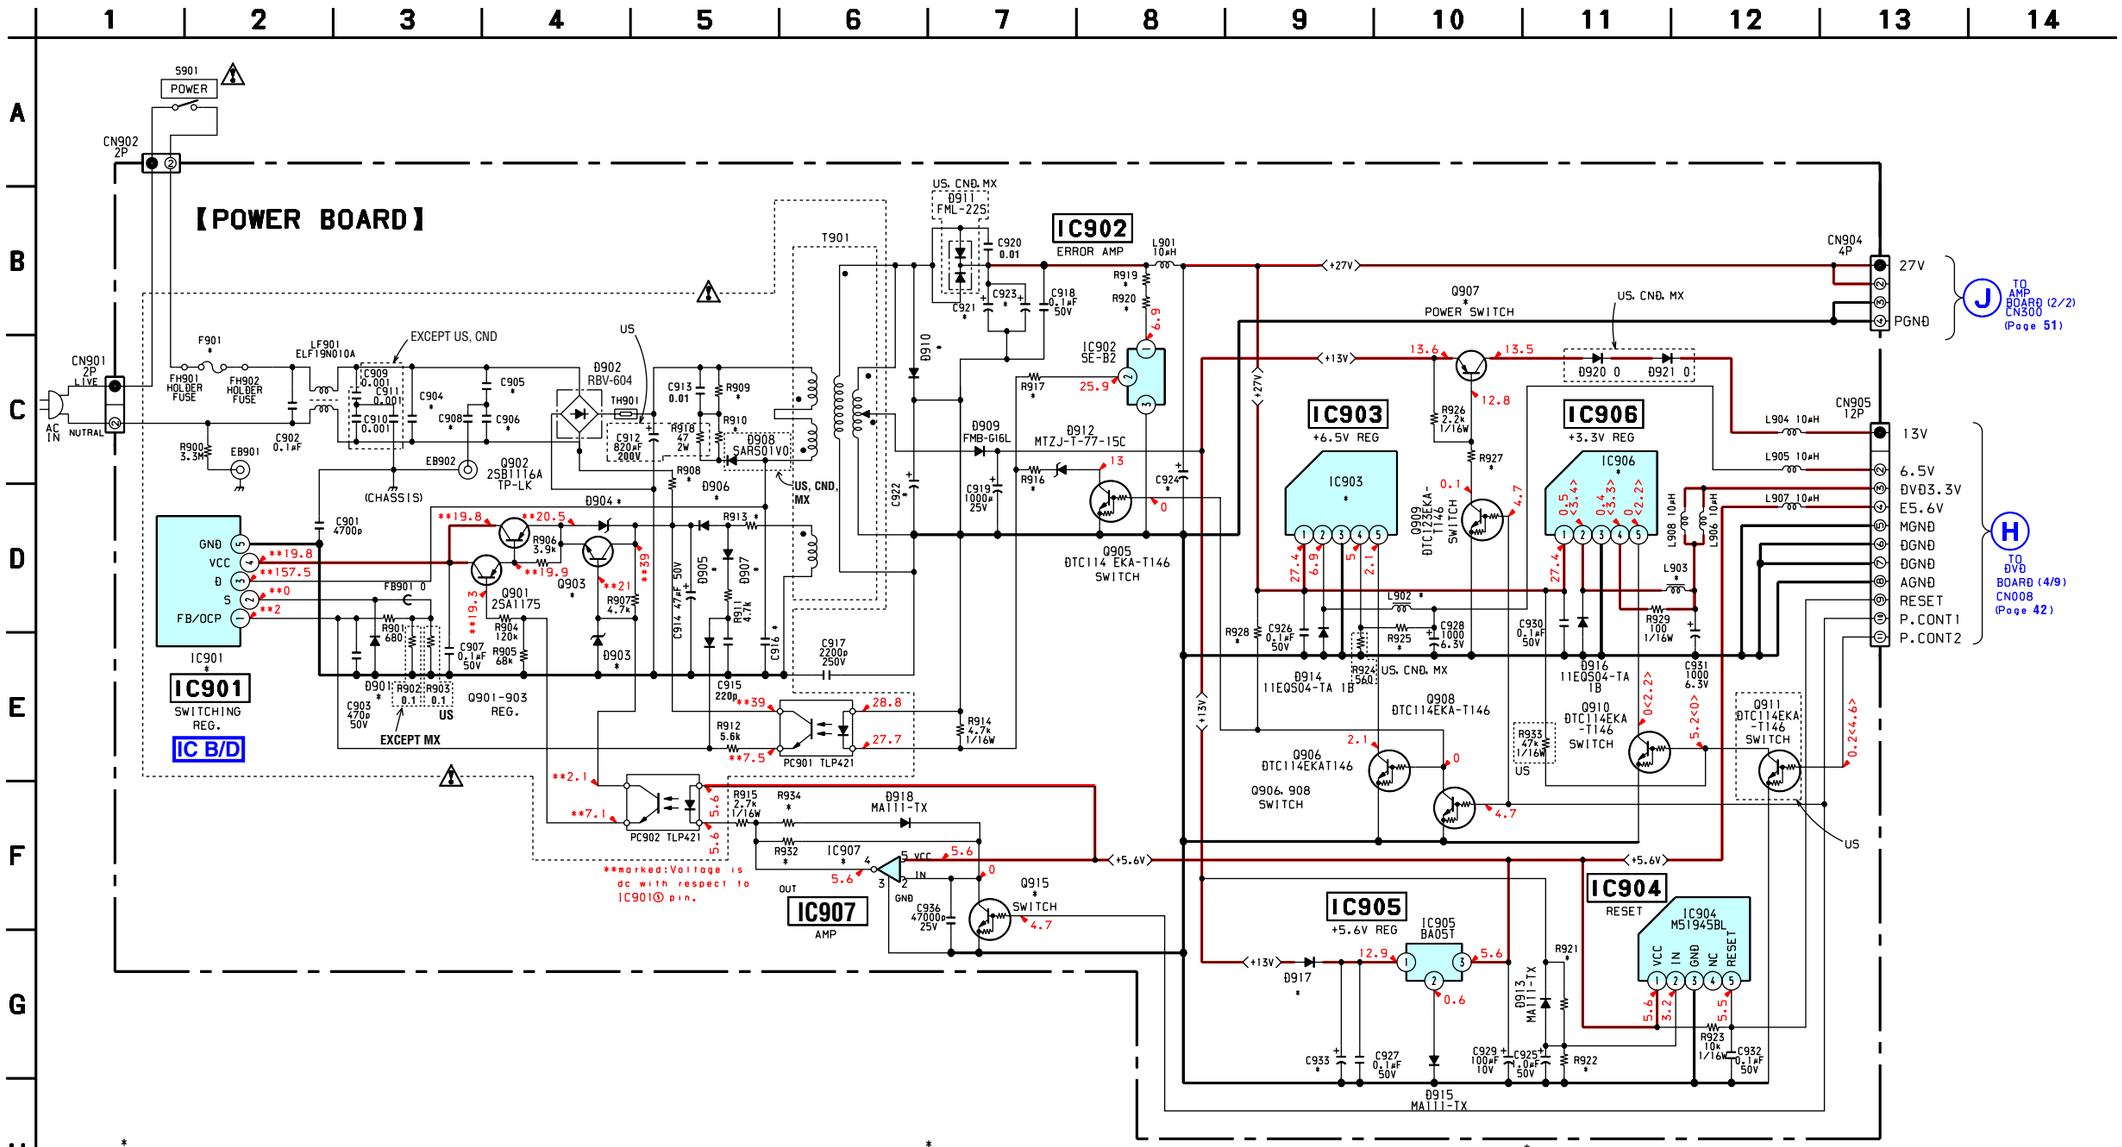

*

	CND	US	EXCEPT US, CND
C904	0.1/275V	0.1/250V	0.001/250V
C908	0.001	0.0022	0.1
C921, 923	1800/25V	2200/35V	2200/50V
	US	CND, MX	EXCEPT US, CND
D903	MTZJ-T-77-22A	MTZJ-77-18C	MTZJ-T-72-18A
	C700 : US, CND, MX	C900	AEP, UK, E, MY, SP, HK, AUS
R919	10K	22K	39K
R921	470K	330K	1M
R922	68K	47K	82K

*

	US	EXCEPT US
C905, 906	0.0022	0.001
C922	22/100V	22/50V
R927	220 1W	1K 1/4W
R928	47K	22K
R932	180K	150K
	US, CND	EXCEPT US, CND
C924	2200/35V	1000/50V
	US	CND, MX
C933	2200/16V	1000/16V
	US, CND, MX	EXCEPT US, CND, MX
C916	4700/630V	2200/800V
D901	1SS133T-72	1SS133T-77
D905-907, 910	11EQS10-TA1	11EQS10-TA2
D917	11ES2-NTA1B	11ES2-NTA2B
F901	5A/125V	3.15A/250V
IC901	STR-F6426S	STR-F6676
IC903	SI-8050JF	SI-8050S-LF1101
IC906	SI-8033JF	SI-8033S
IC907	TC45584F (TE85R)	TC7S14FU (TE85R)
Q907	2SB1640 (TP)	2SB1375
Q915	ÐTA114EKA-T146	ÐTC114EKA-T146
R908	33K 1W	33K 2W
R909	220K 1/4W	220K 1/2W
R913	33 1/4W	2.2 1/6W
R916	2.2K	1.8K
R917	1.8K	2.7K
R920	22K	6.8K
R925	150	1.5K
R934	22K	18K

*

	CND	EXCEPT CND
L902, 903	150uH	100uH
	C700	C900
Q903	2SD1616A-TP-LK	MTZJ-T-77-18C

5-31. IC BLOCK DIAGRAMS

IC102 IMIC6001BT-D (DVD BOARD)

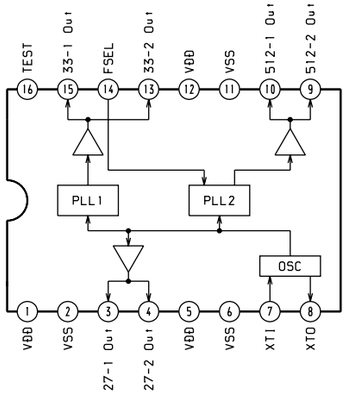

IC606 LC89056W (DVD BOARD)

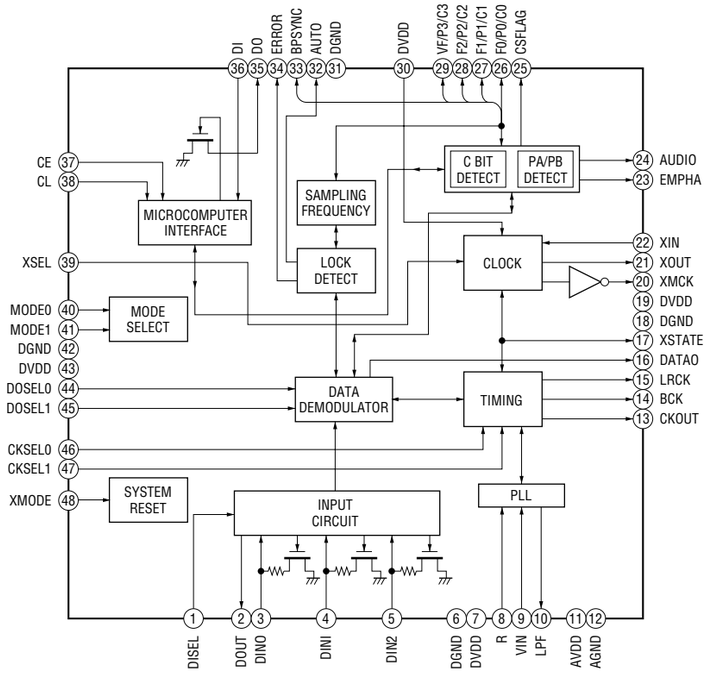

IC802 MSM9202-05GS-KDR1 (FP-1089 BOARD)

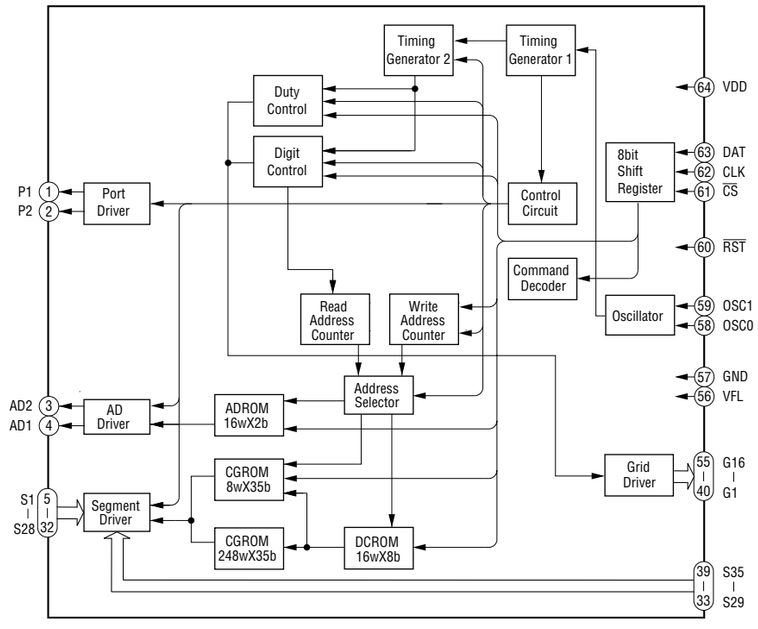

IC608 PCM1748 (DVD BOARD)

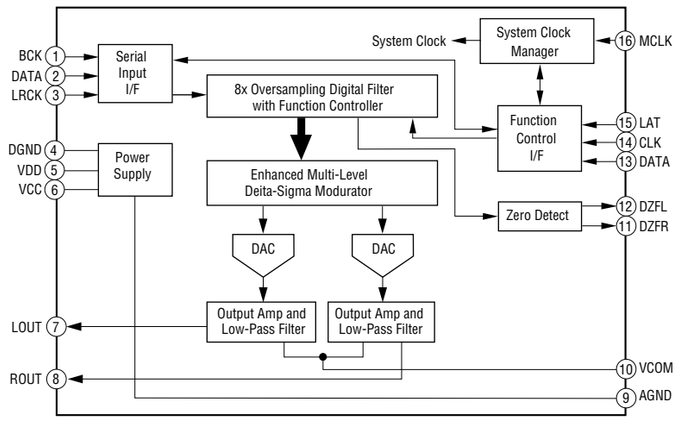

IC600 MC14052BDR2 (I/O BOARD)

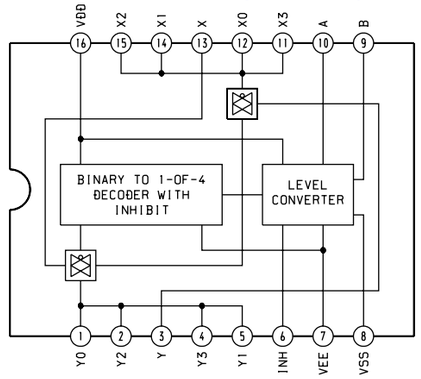

IC604 BU1924F-E2 (I/O BOARD)

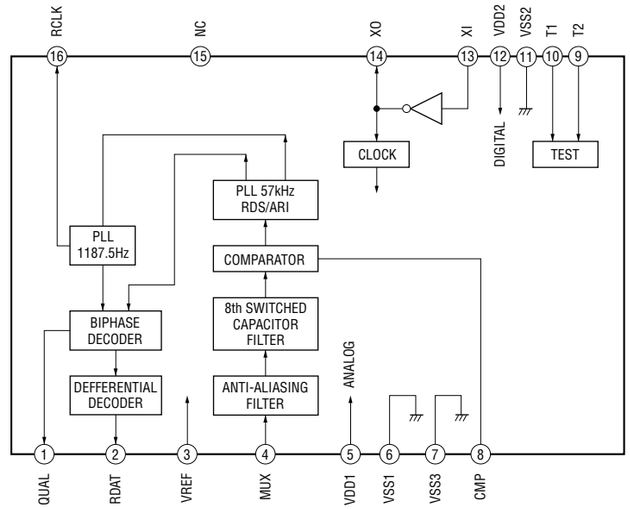

IC001 SP3728AC (RF-240 BOARD)

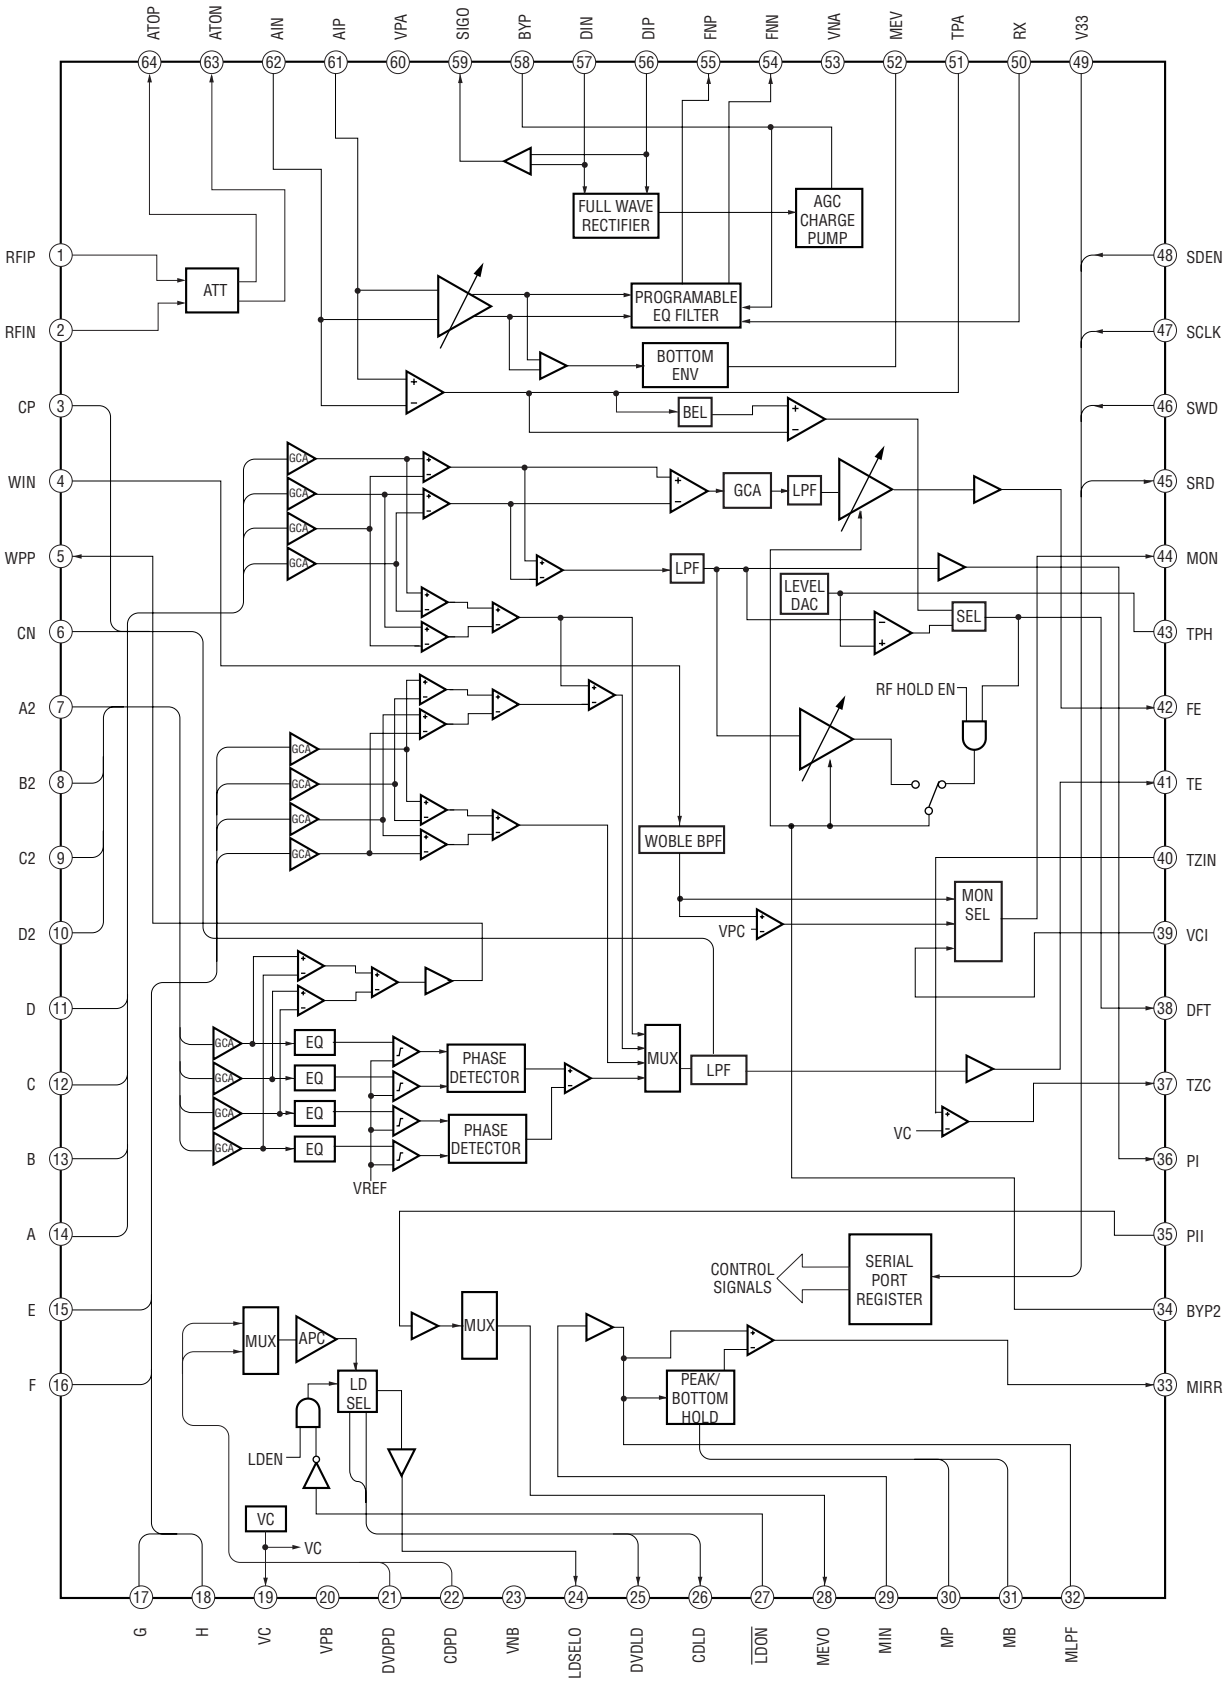

IC901 STR-F6676 (POWER BOARD) (EXCEPT US, CND, MX)

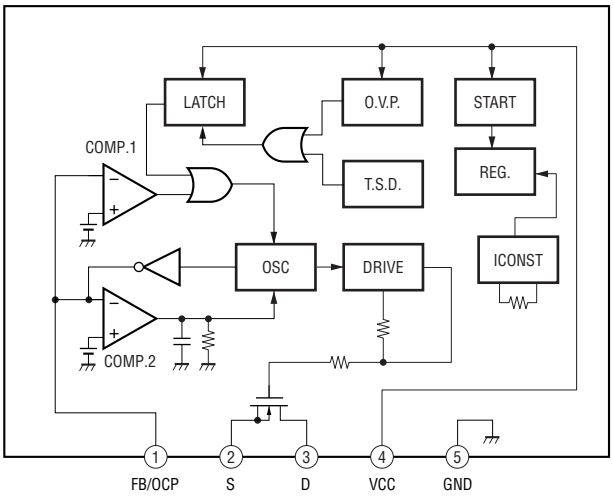

IC901 STR-F6426S (POWER BOARD) (US, CND, MX)

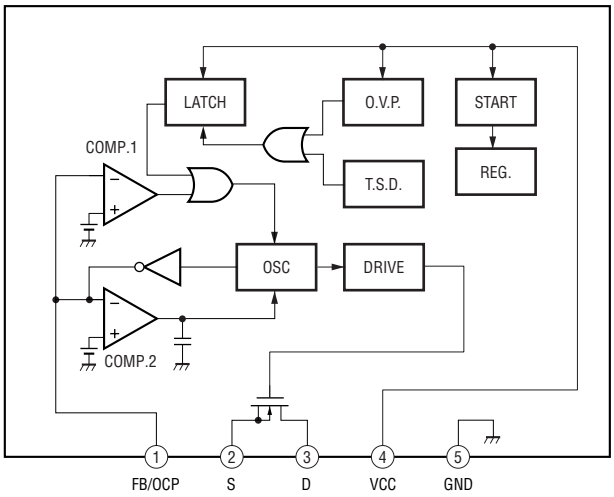

5-32. IC PIN FUNCTION DESCRIPTION

• IC103 MB91307APFV-G-BND-E1 (SYSTEM CONTROL) (DVD BOARD)

Pin No.	Pin Name	I/O	Description
1 to 5	HA17 - 21	O	Address signal output
6	HA22	O	Address signal output (Not used)
7	WP	O	I2C EEPROM write protect signal output
8	TRM/XKRCS	O	Chip select signal output to IC801(CXD2752R)
9	AVCC	–	Analog power supply
10	AVRH	–	A/D converter reference voltage supply
11	AVSS	–	Analog ground
12	AN0	I	Region setting input
13	AN1	I	Model setting input
14	AN2	I	Destination setting input
15	AN3	I	Not used (pull-up)
16	INT0	I	Interrupt signal input from IC503(AV Decoder)
17	INT1	I	Interrupt signal input from IC302(CXD9635R/ARP)
18	INT2	I	Interrupt signal input from IC302(CXD9635R/SDSP)
19	INT3	I	FGA interrupt signal input
20	INT4	I	Interrupt signal input from IC901(CPU)
21	INT5	I	Interrupt signal input from IC801(CXD2752R)
22	INT6	O	Soft mute control signal output to IC801(CXD2752R)
23	INT7	–	Not used
24	VCC	–	Power supply
25	SI0	I	Serial data input from IC901(CPU)
26	SO0	O	Serial data output to IC901(CPU)
27	SC0	O	Serial clock output to IC901(CPU)
28	SI1	I	Serial data input from IC801(CXD2752R)
29	SO1	O	Serial data output to IC801(CXD2752R)
30	SC1	O	Serial clock output to IC801(CXD2752R)
31	SI2	I	RS-232C data input for debugging
32	SO2	O	RS-232C data output for debugging
33	SC2	O	RS-232C clock input or output for debugging (Not used)
34	VSS	–	Ground
35	XRST	O	System reset signal output
36	XARPRST	O	Reset signal output to IC302(CXD9635R/ARP)
37	RGBSEL/MICMUTE	–	Not used
38	SDA	I/O	I2C data input or output
39	SCL	O	I2C clock output
40	TRM+/XKRRST	O	Data request selection signal output (DVD : L, SACD : H)
41	EUROV/Y/CLPSW1	–	Not used
42	DISCEXT/CLPSW0	–	Not used
43	MD0	–	Operation mode setting (connected to Vcc)
44	MD1	–	Operation mode setting (connected to Ground)
45	MD2	–	Operation mode setting (connected to Ground)
46	DREQ0	I	DMA-REQ1 signal input
47	DACK0	O	DMA-ACK1 signal output
48	XDRVMUTE	O	Drive mute control signal output to IC401
49	DREQ1	I	DMA-REQ0 signal input
50	DACK1	O	DMA-ACK0 signal output
51	XIFCS	O	Chip select signal output to IC901(CPU)
52	VSS	–	Ground
53	X1	–	Clock (oscillator) output
54	X0	–	Clock (oscillator) input

Pin No.	Pin Name	I/O	Description
55	VCC	–	Power supply
56	CKSW1	I	Chucking switch (Tray SW1) signal input
57	OCSW1	I	Open/Close switch (Tray SW2) signal input
58	CS0X	O	Chip select signal output to external ROM
59	CS1X	–	Not used
60	CS2X	O	Chip select signal output to AVD SDRAM
61	CS3X	O	Chip select signal output to AVD R-BUS
62	CS4X	O	Chip select signal output to IC302(CXD8635R/ARP)
63	CS5X	O	Chip select signal output to IC302(CXD8635R/SDSP)
64	C	–	Terminal for built-in regulator bypass capacitor
65	CS6X	O	FGA CS output
66	CS7X	–	Not used
67	XWAIT	I	external WAIT signal input
68	BGRNTX	I	External bus open aclnowledge signal input (pull-up)
69	BRQ	I	External bus open request signal input (Not used)
70	XRD	O	External bus read enable signal output
71	XWRH	O	Write signal output for upper byte
72	XWRL	O	Write signal output for lower byte (Not used)
73	XMIX	–	Not used
74	HSTX	–	Not used (pull-up)
75	VSS	–	Ground
76	XFRRST	I	Reset signal input
77	CPUCK	O	CPU clock output
78	OCSW2	I	Tray switch signal input
79	XDACK	–	Not used (pull-up)
80	VESCS/X39CS	–	Not used (pull-up)
81	48/44.1K	O	PLL IC control signal output
82	WIDE	O	Video wide offset control signal output
83	MAMUTE	I	IFOK signal input from IC901(CPU)
84	XLDON	O	Laser diode mute control signal output
85 to 100	HD0 -15	I/O	External data bus bits 0 - 15
101	VSS	–	Ground
102 to 109	HA0 - 7	O	Address signal output
110	VCC	–	Power supply
111 to 118	HA8 - 15	O	Address signal output
119	VSS	–	Ground
120	HA16	O	Address signal output

• IC302 CXD9635R (SERVO DSP) (DVD BOARD)

Pin No.	Pin Name	I/O	Description
1	VSS	–	Digital Ground
2	D0	I/O	CPU data
3	D1	I/O	
4	D2	I/O	
5	D3	I/O	
6	D4	I/O	
7	D5	I/O	
8	D6	I/O	
9	D7	I/O	
10	VDD 3.3V	–	Digital power supply 3.3V
11	A0	I	CPU address
12	A1	I	
13	A2	I	
14	A3	I	
15	A4	I	
16	VDD	–	Digital Ground
17	A5	I	CPU address
18	A6	I	
19	A7	I	
20	VDD 1.8V	–	Digital power supply 1.8V
21	XINT	O	Interrupt
22	HINT	O	Host interrupt(DSP)
23	XCS	I	Tip select
24	HCS	I	Host servo tip select
25	XWAT	O	Wait
26	VSS	–	Digital Ground
27	MA0	O	DRAM address
28	MA1	O	
29	MA2	O	
30	MA3	O	
31	MA4	O	
32	MA5	O	
33	MA6	O	
34	MA7	O	
35	MA8	O	
36	MA9	O	
37	VDD 3.3V	–	Digital power supply 3.3V
38	XMWR	O	DRAM write enable
39	XCAS	O	DRAM CAS
40	VSS	–	Digital Ground
41	XRAS	O	DRAM RAS
42	XOE	O	DRAM output enable
43	VDD1 1.8V	–	Digital power supply 1.8V
44	MD0	I/O	DRAM data
45	MD1	I/O	
46	MD2	I/O	
47	MD3	I/O	
48	MD4	I/O	
49	MD5	I/O	
50	MD6	I/O	

Pin No.	Pin Name	I/O	Description
51	MD7	I/O	DRAM data
52	VSS	–	Digital Ground
53	MD8	I/O	DRAM data
54	MD9	I/O	
55	MD10	I/O	
56	MD11	I/O	
57	MD12	I/O	
58	MD13	I/O	
59	MD14	I/O	
60	MD15	I/O	
61	VDD 3.3V	–	Digital power supply 3.3V
62	DATA	O	CDDA data
63	BCLK	O	CDDA bit clock
64	VSS	–	Digital Ground
65	LRCK	O	CDDA LR clock
66	DOUT	O	Digital out
67	VDD 1.8V	–	Digital power supply 1.8V
68	SDCK	O	SD bus clock
69	XSHD	O	SD bus header
70	XSRQ	I/O	SD bus REQ
71	XSAK	O	SD bus ACK
72	SDEF	O	SD bus error flag
73	SD0	I/O	SD bus data
74	SD1	I/O	
75	SD2	I/O	
76	SD3	I/O	
77	VSS	–	Digital Ground
78	SD4	I/O	SD bus data
79	SD5	I/O	
80	SD6	I/O	
81	SD7	I/O	
82	VDD 3.3V	–	Digital power supply 3.3V
83	MNT0	I/O	Monitor bus (83 - 88 : Not used)
84	MNT1	I/O	
85	MNT2	I/O	
86	MNT3	I/O	
87	MNT4	I/O	
88	MNT5	I/O	
89	MNT6	I/O	
90	MNT7	I/O	
91	ESTB	O	Error storbe (Not used)
92	VDD 1.8V	–	Digital power supply 1.8V
93	RFD	I/O	RF digital data in/out
94	VSS	–	Digital Ground
95	PLCKO	O	PLCK output
96	ADO0	O	ADC output
97	ADO1	O	
98	ADO2	O	
99	ADO3	O	
100	ADO4	O	

Pin No.	Pin Name	I/O	Description
101	ADO5	O	ADC output
102	ADO6	O	
103	ADO7	O	
104	VSS	–	Digital Ground
105	VSSA4	–	Analog Ground
106	VCO	I	VCO control input
107	R1	I	VCO outside resistance 1
108	R2	I	VCO outside resistance 2
109	VDDA4 3.3V	–	Analog power supply
110	VSSA3	–	Analog Ground
111	INP	I	OP amp positive input
112	INM	I	OP amp negative input
113	FR3	I	Feedback resistance 3
114	FR2	I	Feedback resistance 2
115	FR1	I	Feedback resistance 1
116	Y	O	OP amp output
117	VDDA3 3.3V	–	Analog power supply
118	VREF	I	DAC reference voltage
119	BIAS	I	DAC bias pin
120	VDDA2 3.3V	–	Analog power supply
121	VSSA2	–	Analog Ground
122	AOUT	O	DAC output
123	IREF	I	Reference current of DAC
124	VSSD2	–	Digital Ground(DAC)
125	VDDD2 3.3V	–	Digital power supply(DAC)
126	VRT	I	ADC reference
127	VDDA1 3.3V	–	Analog power supply
128	RFIN1	I	RF input
129	AIN	I	RF input
130	VSSA1	–	Analog Ground
131	RFIN1	I	RF input
132	VRB	I	ADC reference
133	VSSD1	–	Digital Ground(ADC)
134	VDDD1 3.3V	–	Digital power supply(ADC)
135	ADC0	I	ADC input
136	ADC1	I	
137	ADC2	I	
138	VDDA0 3.3V	–	ASW analog power supply
139	ADC3	I	ADC input
140	ADC4	I	
141	VSSA0	–	ASW analog ground
142	ADC5	I	ADC input
143	ADC6	I	
144	ADC7	I	
145	VDDD0 3.3V	–	ADC digital power supply(DSP)
146	VSSD0	–	ADC digital ground DSP
147	VRBA	I	ADC reference
148	VSSA0	–	Analog ground(ADC)
149	TESTAA	O	ASW output
150	VDDA0 3.3V	–	ADC analog power supply(DSP)

Pin No.	Pin Name	I/O	Description
151	VRTA	I	ADC reference
152	VSS	–	Digital Ground
153	TESTK0	I	Test terminal L
154	TESTK1	I	
155	TESTK2	I	
156	XDSPRST	I	DSP reset
157	XARPRST	I	Reset
158	VSS	–	Digital Ground
159	MDS0	O	CLV speed error
160	MON	O	Motor on
161	MDP0	O	CLV phase error
162	DFCT	I/O	Defect detection output
163	JITPWM	O	Jitter PWM output (Not used)
164	LOCK	O	EFM lock detection (Not used)
165	VDD1 1.8V	–	Digital power supply 1.8V
166	GIO0/INT2	I/O	GIO/external interruption
167	GIO1/INT3	I/O	
168	GIO2/INT4	I/O	
169	GIO3/INT5	I/O	
170	VDD 3.3V	–	Digital power supply 3.3V
171	GIO4/PGREF	I/O	GIO/PGREF input (Not used)
172	GIO5/PGIN	I/O	GIO/PGIN input
173	GIO6/SDI	I/O	GIO/serial data in
174	GIO7/SDO	I/O	GIO/serial data out
175	GIO8/SCK	I/O	GIO/serial clock
176	GIO9/FGREF	I/O	GIO/FGREF input
177	GIO10/FGIN	I/O	GIO/FGIN input
178	GIO11/TMC2	I/O	GIO/Timer 2 clock input (Not used)
179	GIO12	I/O	GIO(input and output) (179 : Not used)
180	GIO13	I/O	
181	VSS	–	Digital Ground
182	CLKIN	I	Clock input
183	VSSA5	–	Analog Ground
184	VDDA5 1.8V	–	Analog power supply
185	DFCTI	I	Defect input
186	VSS	–	Digital Ground
187	MCKI	I	Clock for ECC 33MHz
188	VDD 1.8V	–	Digital power supply 1.8V
189	SCKI	I	System clock
190	VSS	–	Digital Ground
191	TRST	I	JTAG Boundary scan (193 : Not used)
192	TMS	I	
193	TDI	I	
194	TCK	I	
195	TDO	O	
196	TZC	I	TZC input
197	MIRR	I	MIRR input
198	PWM0	O	PWM output
199	PWM1	O	
200	PWM2	O	

Pin No.	Pin Name	I/O	Description
201	VDD 3.3V	–	Digital power supply 3.3V
202	PDM0	O	PDM output
203	PDM1	O	
204	PDM2	O	
205	PDM3	O	
206	VSS	–	Digital Ground
207	XWR	I	CPU light
208	XRD	I	CPU lead

• IC801 CXD2752R (PLAYBACK SIGNAL PROCESSOR) (DVD BOARD)

Pin No.	Pin Name	I/O	Description
1	VSCA0	–	Ground
2	XMSLAT	I	Latch signal input for micom serial communication
3	MSCK	I	Shift clock input for micom serial communication
4	MSDATI	I	Data input for micom serial communication
5	VDCA0	–	Power supply
6	MSDATO	O	Data output for micom serial communication
7	MSREADY	O	Output ready flag output for micom serial communication
8	XMSDOE	O	Output enable signal output for micom serial communication (Not used)
9	XRST	I	Reset signal input
10	SMUTE	I	Soft mute signal input (H:soft mute, L:off)
11	MCKI	I	Master clock input (768Fs 33.8688MHz)
12	VSIOA0	–	Ground for I/O
13	EXCKO1	O	External clock output 1
14	EXCKO2	O	External clock output 2 (Not used)
15	LRCK	O	Clock output (1Fs 44.1kHz)(Not used)
16	F75HZ	O	Frame signal output
17	VDIOA0	–	Power supply for I/O
18 to 25	MNT0 - 7	O	Monitor signal output (Not used)
26	TCK	I	Test clock input (connected to ground)
27	TDI	I	Input terminal for test
28	VSCA1	–	Ground
29	TDO	O	Output terminal for test (open)
30	TMS	I	Input terminal for test (open)
31	TRST	I	Reset terminal for test (open)
32 to 34	TEST1 - 3	I	Input terminal for test (connected to ground)
35	VDCA1	–	Power supply
36	UBIT	O	Output terminal for test (open)
37	XBIT	O	DST monitor terminal (open)
38 to 41	SUPDT0 - 3	O	Supplementary data output (open)
42	VSIOA1	–	Ground for I/O
43, 44	SUPDT4 - 5	O	Supplementary data output (open)
45	VDIOA1	–	Power supply for I/O
46, 47	SUPDT6 - 7	O	Supplementary data output (open)
48	SUPEN	O	Supplementary data acknoledge output (open)
49	VSCA2	–	Ground
50	NC	O	Output terminal for test (open)
51, 52	TEST4 - 5	I	Input terminal for test (connected to ground)
53	NC	O	Output terminal for test (open)
54	VDCA2	–	Power supply
55, 56	NC	O	Output terminal for test (open)
57	BCKASL	I	Bit clock I/O selection signal input for DSD data output (L:slave, H:master)
58	VXDSD0	–	Ground for DSD data output
59	BCKAI	I	Bit clock input for DSD data output (open)
60	BCKAO	O	Bit clock output for DSD data output
61	PHREFI	I	Phase reference signal input for DSD signal phase modulation (open)
62	PHREFO	O	Phase reference signal output for DSD signal phase modulation (open)
63	ZDFL	O	Lch zero data detection flag signal output (open)
64	DSAL	O	Lch DSD data output
65	ZDFR	O	Rch zero data detection flag signal output (open)
66	DSAR	O	Rch DSD data output

Pin No.	Pin Name	I/O	Description
67	VDDSD0	–	Power supply for DSD data output
68	ZDFC	O	Cch zero data detection flag signal output (open)
69	DSAC	O	Cch DSD data output
70	ZDFLFE	O	LFEch zero data detection flag signal output (open)
71	DSALFE	O	LFEch DSD data output
72	VSDSD1	–	Ground for DSD data output
73	ZDFLS	O	LSch zero data detection flag signal output (open)
74	DSALS	O	LSch DSD data output
75	ZDFRS	O	RSch zero data detection flag signal output (open)
76	DSARS	O	RSch DSD data output
77	VDDSD1	–	Power supply for DSD data output
78, 79	IOUT0 - 1	O	Output terminal for test (open)
80	VSCB0	–	Ground
81, 82	IOUT2 - 3	O	Output terminal for test (open)
83	VDCB0	–	Power supply
84, 85	IOUT4 -5	O	Output terminal for test (open)
86	VSIOB0	–	Ground for I/O
87	IANCO	O	Output terminal for test (open)
88	IFULL	I	Input teminal for test (connected to ground)
89	IEMPTY	I	Input teminal for test (connected to ground)
90	VDIOB0	–	Power supply for I/O
91	IFRM	O	Output terminal for test (open)
92	IOUTE	O	Output terminal for test (open)
93	IBCK	O	Output terminal for test (open)
94	VSCB1	–	Ground
95	IERR	I	Input teminal for test (connected to Vdd)
96	IANCI	I	Input teminal for test (connected to ground)
97	IPLAN	I	Input teminal for test (connected to Vdd)
98	IHOLD	O	Output terminal for test (open)
99	VDCB1	–	Power supply
100	IVLD	I	Input teminal for test (connected to ground)
101 to 105	IDIN0 - 4	I	Input teminal for test (connected to ground)
106	VSIOB1	–	Ground for I/O
107 to 109	IDIN5 -7	I	Input teminal for test (connected to ground)
110	VDIOB1	–	Power supply for I/O
111 to 114	WAD0 - 3	I	External A/D data input for PSP physical disc mark detection
115	TESTI	–	Input teminal for test (pull-down)
116	VSCB2	–	Ground
117 to 120	WAD4 - 7	I	External A/D data input for PSP physical disc mark detection
121	VDCB2	–	Power supply
122	WRFD	I	Input teminal for test (connected to ground)
123	WCK	I	Clock input for PSP physical disc mark detection
124 to 125	WAVDD0 - 1	–	A/D power supply for PSP physical disc mark detection (+2.5v)
126	WARFI	I	Analog RF signal input for PSP physical disc mark detection
127	WAVRB	I	A/D bottom reference input for PSP physical disc mark detection
128 to 129	WAVSS1 - 0	–	A/D ground for PSP physical disc mark detection
130	VSIOA2	–	Ground for I/O
131 to 134	DQ7 - 4	I/O	SDRAM data input/output terminal
135	VDIOA2	–	Power supply for I/O (Not used)
136 to 139	DQ3 - 0	I/O	SDRAM data input/output terminal

Pin No.	Pin Name	I/O	Description
140	VSIOA3	–	Ground for I/O (Not used)
141	DCLK	O	Clock output terminal for SDRAM
142	DCKE	O	Clock enable signal output for SDRAM
143	XWE	O	Write enable signal output for SDRAM
144	XCAS	O	Column address strobe signal output for SDRAM
145	XRAS	O	Row address strobe signal output for SDRAM
146	VDIOA3	–	Ground for I/O
147	NC	O	Output terminal for test (open)
148, 149	A11 -10	O	Address signal output for SDRAM
150	VSCA3	–	Ground (Not used)
151, 152	A9 - 8	O	Address signal output for SDRAM
153	VDCA3	–	Power supply
154 to 157	A7 - 4	O	Address signal output for SDRAM
158	VSIOA4	–	Ground for I/O
159 to 162	A3 - 0	O	Address signal output for SDRAM
163	VDIOA4	–	Power supply for I/O
164	XSRQ	O	Data request output to the front end processor
165	XSHD	I	Headder flag input from the front end processor
166	SDCK	I	Data transfer clock input from the front end processor
167	XSAK	I	Data effective flag input from the front end processor
168	SDEF	I	Error flag input from the front end processor
169 to 176	SD0 -7	I	Stream data input from the front end processor

SECTION 6
EXPLODED VIEWS

NOTE:
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.

- Abbreviation
  AUS : Australian model
  CND : Canadian model
  HK : Hong Kong model
  MX : Mexican model
  MY : Malaysia model
  SP : Singapore model

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

6-1. CASE (TOP) SECTION

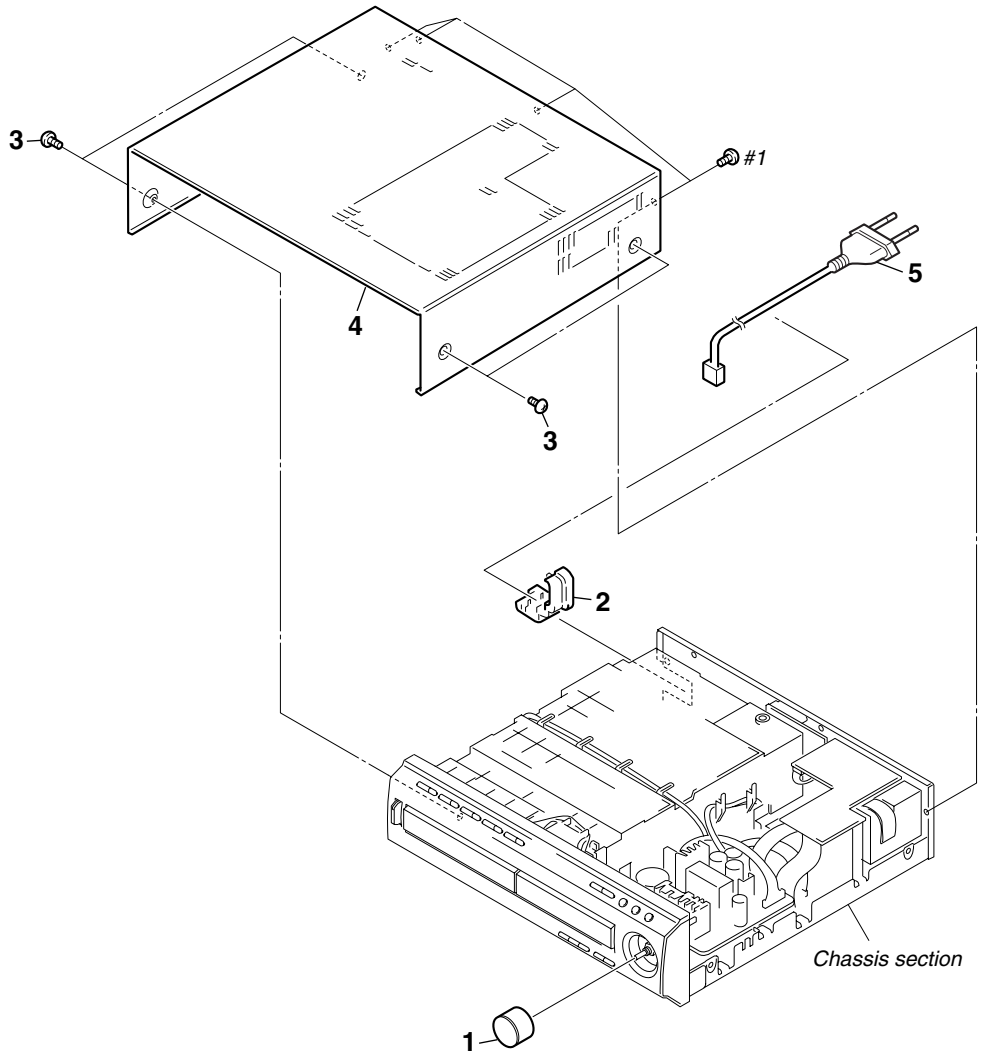

Ref. No.	Part No.	Description	Remark
1	X-4952-564-1	KNOB (VOL) ASSY (EXCEPT US)	
1	X-4954-219-1	KNOB (VOL) ASSY (US)	
2	4-217-350-11	STOPPER, CORD	
3	4-221-580-01	SCREW, CASE	
4	4-234-939-01	CASE	
⚠5	1-775-789-91	CORD, POWER (MX)	
⚠5	1-783-532-11	CORD, POWER (US, CND)	
⚠5	1-690-608-11	CORD, POWER (AUS)	
⚠5	1-696-169-21	CORD, POWER (AEP, UK, E, MY, SP, HK)	

6-2. CHASSIS SECTION

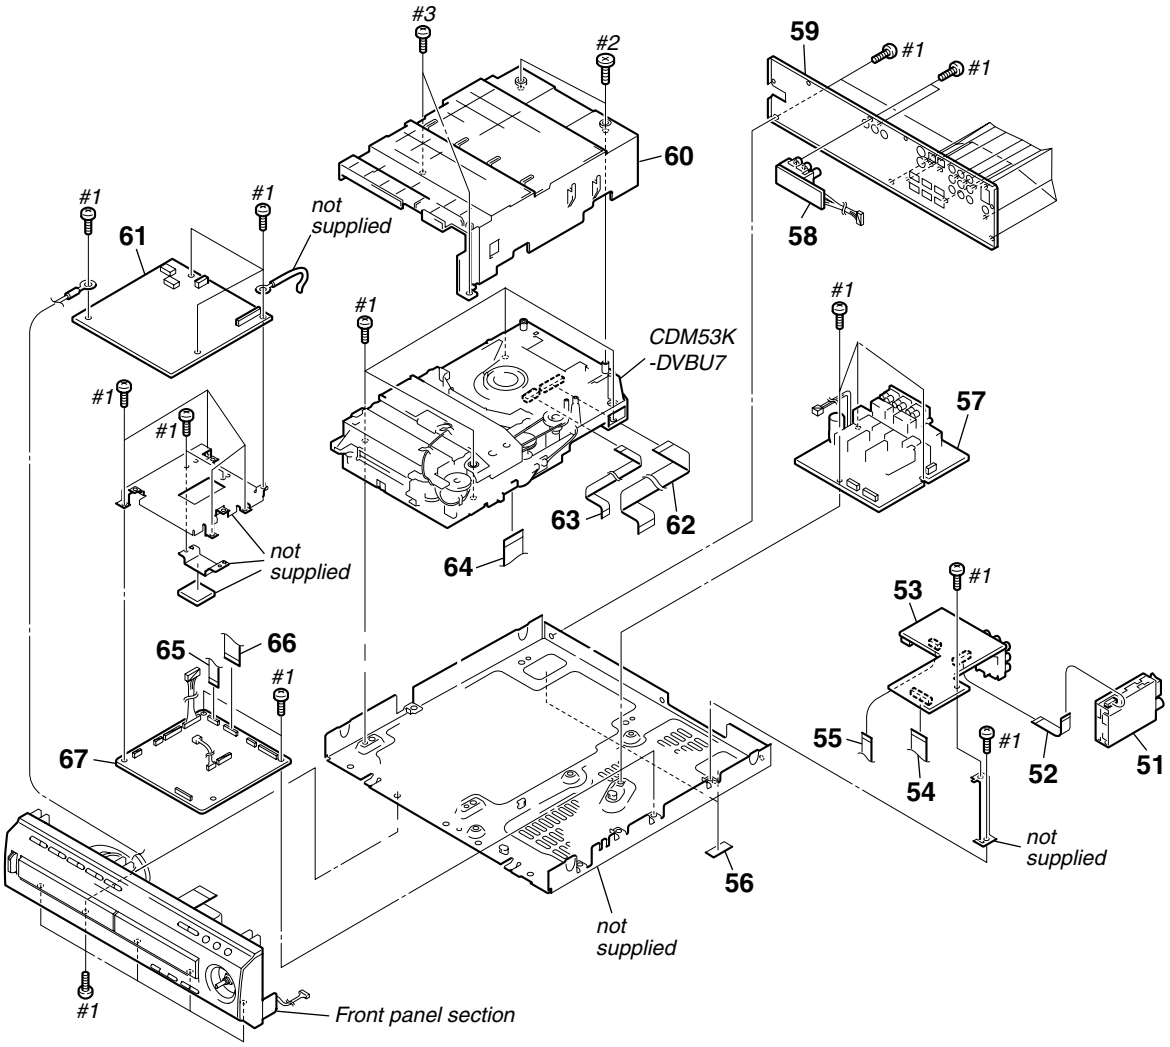

Ref. No.	Part No.	Description	Remark
51	A-4726-404-A	TUNER UNIT (US, CND)	
51	A-4726-588-A	TUNER UNIT (AEP, UK)	
51	A-4726-594-A	TUNER UNIT (MX)	
51	A-4726-905-A	TUNER UNIT (E, MY, SP, HK)	
52	1-823-082-11	CABLE, FLEXIBLE FLAT (13 CORE)	
53	A-4726-380-A	I/O MOUNTED PC BOARD (US)	
53	A-4726-818-A	I/O MOUNTED PC BOARD (CND, E, MY, SP, HK, MX, AUS)	
53	A-4726-917-A	I/O MOUNTED PC BOARD (C900)	
53	A-4727-015-A	I/O MOUNTED PC BOARD (AEP,UK)	
54	1-823-124-11	CABLE, FLEXIBLE FLAT (29 CORE)	
55	1-823-355-11	CABLE, FLEXIBLE FLAT (13 CORE)	
56	4-234-924-01	FOOT	
57	A-4726-386-A	AMP BOARD (US)	
57	A-4726-816-A	AMP BOARD (CND, MX)	
57	A-4726-915-A	AMP BOARD (C900)	
57	A-4727-013-A	AMP BOARD (AEP, UK, E, MY, SP, HK)	
58	A-4726-918-A	COMPONENT MOUNTED PC BOARD	
59	X-4953-868-1	BACK PANEL SUB ASSY (C700:US)	
59	X-4954-115-1	PANEL SUB ASSY, BACK (C700:CND)	
59	X-4954-145-1	BACK PANEL SUB ASSY (C900:US)	
59	X-4954-146-1	BACK PANEL SUB ASSY (C900:CND)	
59	X-4954-160-1	PANEL SUB ASSY, BACK (AEP,UK)	
59	X-4954-162-1	PANEL SUB ASSY, BACK (MY, SP)	

Ref. No.	Part No.	Description	Remark
59	X-4954-163-1	PANEL SUB ASSY, BACK (HK)	
59	X-4954-164-1	PANEL SUB ASSY, BACK (AUS)	
59	X-4954-165-1	PANEL SUB ASSY, BACK (E)	
59	X-4954-194-1	PANEL SUB ASSY, BACK (MX)	
60	4-234-933-01	COVER, MD	
61	A-4726-381-A	POWER BOARD, COMPLETE (C700:US)	
61	A-4726-832-A	POWER BOARD, COMPLETE (C700:CND)	
61	A-4726-912-A	POWER BOARD, COMPLETE (C900:US)	
61	A-4726-919-A	POWER BOARD, COMPLETE (C900:CND)	
61	A-4727-010-A	POWER BOARD, COMPLETE (AEP, UK, E, MY, SP, HK, AUS)	
61	A-4727-058-A	POWER BOARD, COMPLETE (MX)	
62	1-823-080-11	CABLE, FLEXIBLE FLAT (25 CORE)	
63	1-823-083-11	CABLE, FLEXIBLE FLAT (9 CORE)	
64	1-823-078-11	CABLE, FLEXIBLE FLAT (17 CORE)	
65	1-823-125-11	CABLE, FLEXIBLE FLAT (12 CORE)	
66	1-823-084-11	CABLE, FLEXIBLE FLAT (17 CORE)	
67	A-4726-913-A	DVD BOARD, COMPLETE (C900)	
67	A-4726-938-A	DVD BOARD, COMPLETE (C700:US)	
67	A-4726-940-A	DVD BOARD, COMPLETE (C700:CND)	
67	A-4727-011-A	DVD BOARD, COMPLETE (AEP, UK)	
67	A-4727-016-A	DVD BOARD, COMPLETE (HK, SP)	
67	A-4727-018-A	DVD BOARD, COMPLETE (E, AUS)	
67	A-4727-059-A	DVD BOARD, COMPLETE (MX)	

6-3. FRONT PANEL SECTION

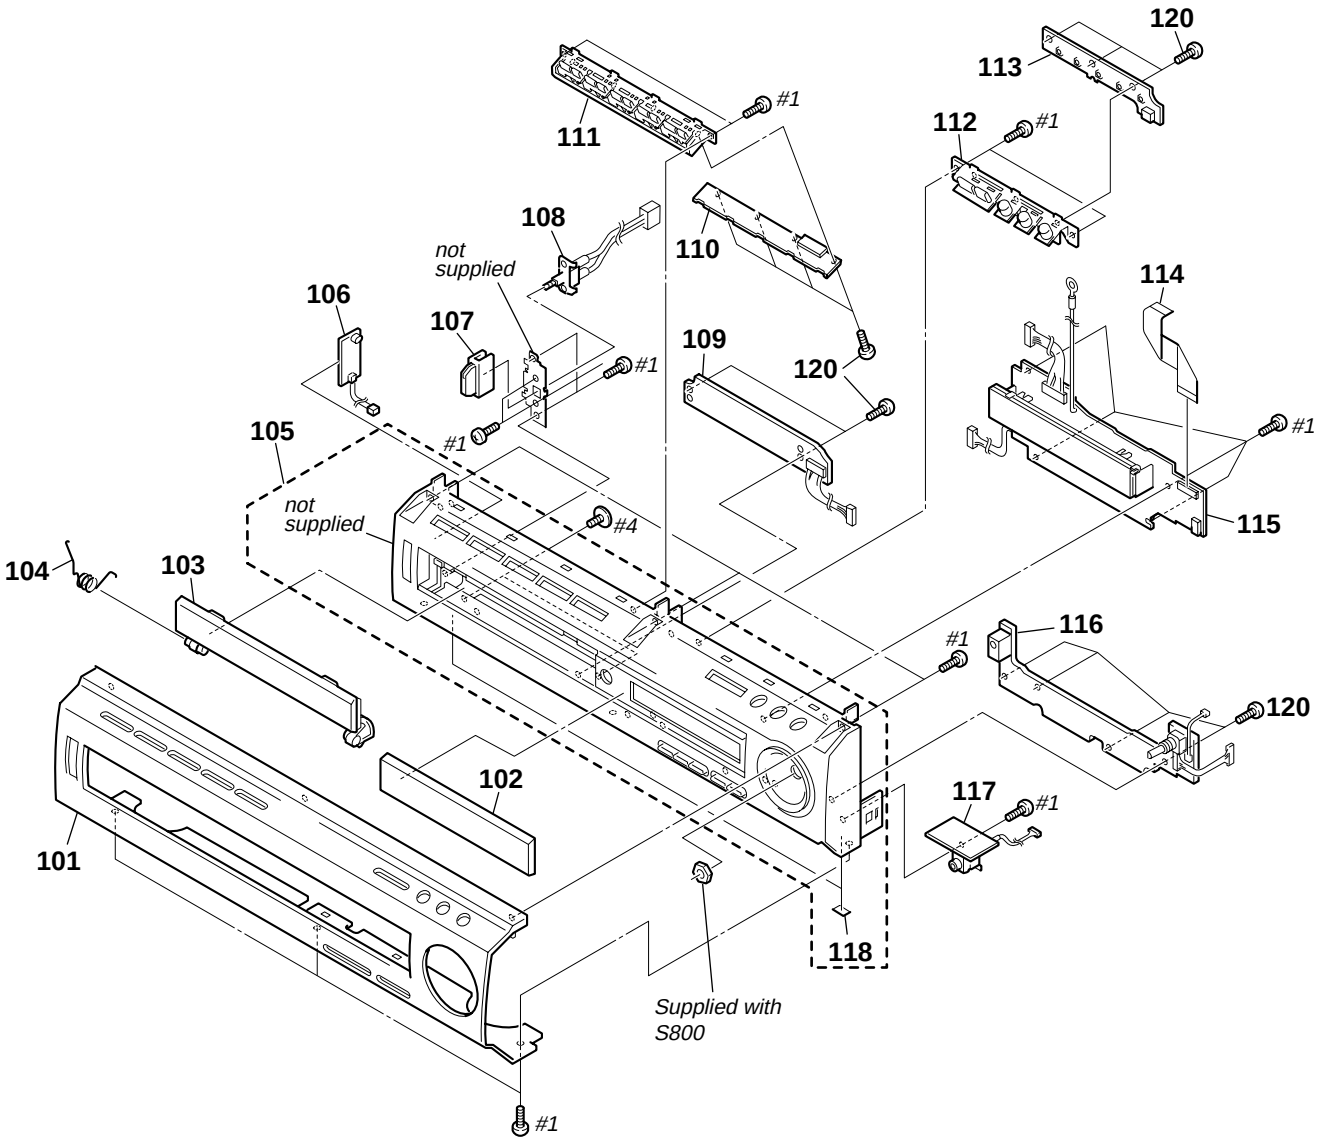

Ref. No.	Part No.	Description	Remark
101	4-234-934-01	PANEL (AL), FRONT	
102	X-4953-863-1	FL WINDOW SUB ASSY	
103	X-4953-862-1	LID WINDOW SUB ASSY	
104	4-234-948-01	SPRING (LID OPEN)	
105	X-4953-865-1	F/PANEL SUB ASSY	
106	1-682-002-11	PW-1089 BOARD	
107	X-4953-864-1	POWER BUTTON SUB ASSY	
108	1-786-210-11	SWITCH, POWER	
109	1-681-998-11	DDCON-1089 BOARD	
110	A-4726-385-A	DS-1089 MOUNTED PC BOARD	(C700:US, C900)
110	A-4726-822-A	DS-1089 MOUNTED PC BOARD	(C700:CND, AEP, UK, MY, SP, E, HK, MX, AUS)

Ref. No.	Part No.	Description	Remark
111	X-4953-866-1	PLAY BUTTON SUB ASSY	
112	4-234-932-01	BUTTON (DVD)	
113	1-682-000-11	SW-1089 BOARD	
114	1-823-081-11	CABLE, FLEXIBLE FLAT (17 CORE)	
115	A-4726-392-A	FP-1089 MOUNTED PC BOARD	(C700:US, C900)
115	A-4726-828-A	FP-1089 MOUNTED PC BOARD	(C700:CND, AEP, UK, MY, SP, E, HK, MX, AUS)
116	1-681-999-11	FU-1098 BOARD	
117	1-682-003-11	HP-1089 BOARD	
118	4-234-924-01	FOOT	
120	4-931-757-31	SCREW(DIA.2.6X8)(IT3B),TAPPING	

6-4. OVERALL SECTION (CDM53K-DVBU7)

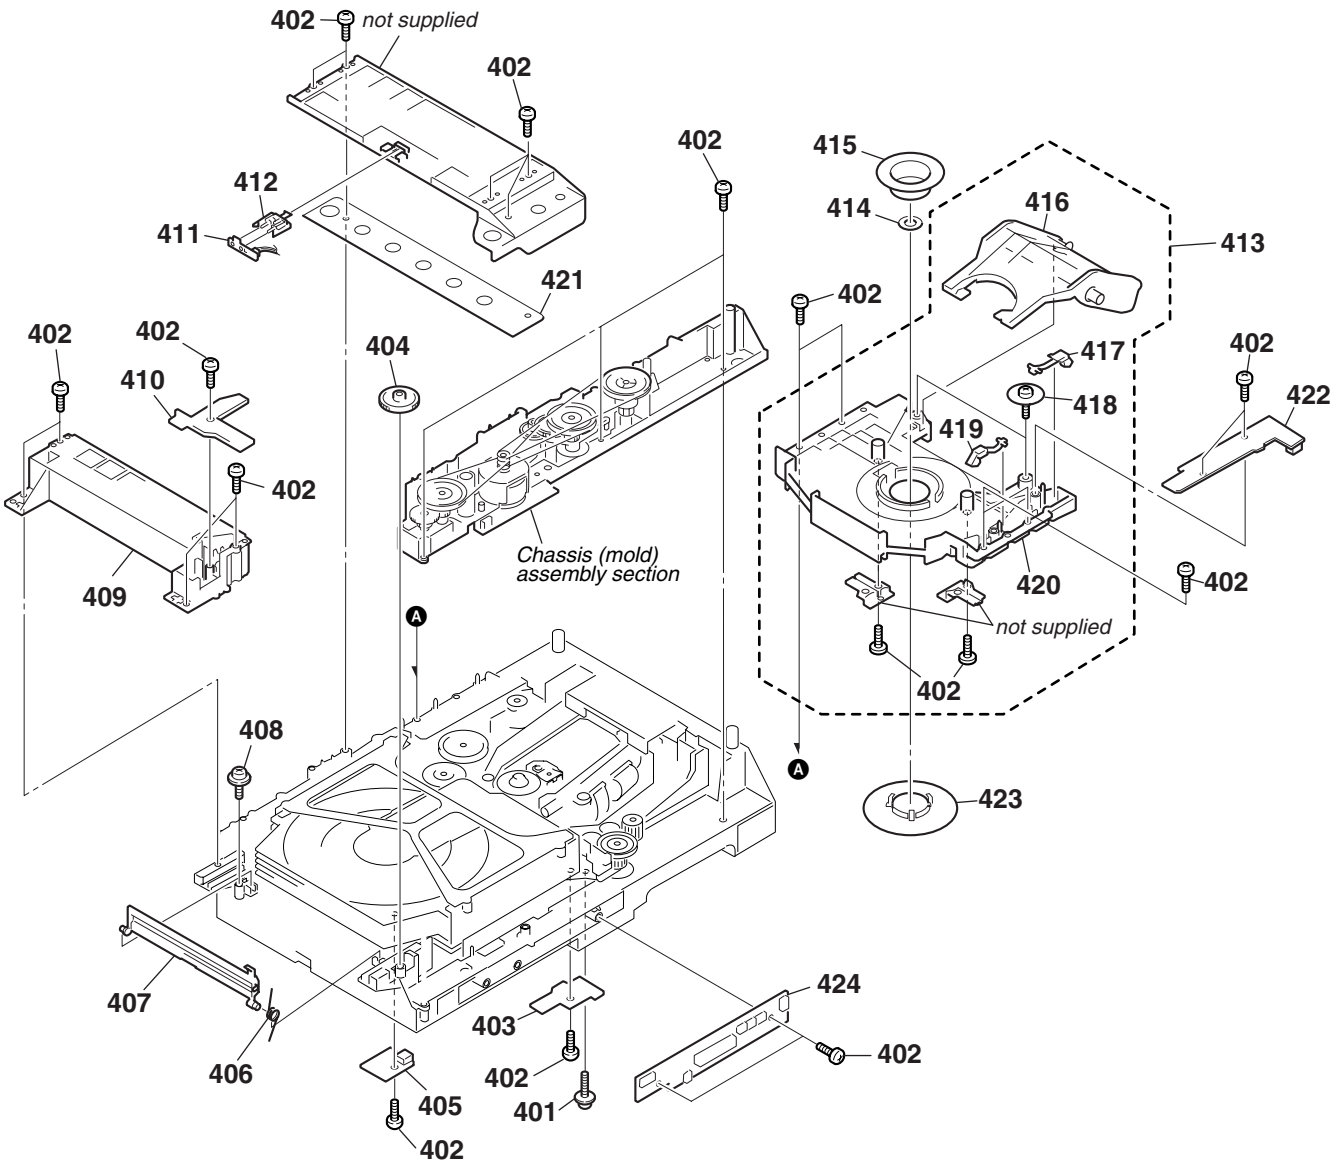

Ref. No.	Part No.	Description	Remark
401	3-341-549-01	SCREW (2.6X12) (DIA.7.5),+PTP WH	
402	4-951-620-41	SCREW (2.6), +BVTP	
403	1-675-724-21	INIT/COUNT SW BOARD	
404	4-211-215-01	GEAR (EJECT)	
405	1-675-726-21	SENSOR BOARD	
406	4-212-676-01	SPRING (LID), TORSIONOR	
407	4-212-674-11	LID (DISC)	
408	4-933-134-01	SCREW (+PTPWH M2.6X6)	
409	A-4672-907-A	FITTING BASE (GUIDE) ASSY	
410	1-675-725-21	OUT SW BOARD	
411	1-675-727-21	SENSOR 2 BOARD	
412	4-964-461-02	HOLDER (SENSOR)	
413	A-4672-872-D	BASE (MAGNET) ASSY, FITTING	

Ref. No.	Part No.	Description	Remark
414	3-053-844-01	YOKE	
415	4-234-723-01	PULLEY (AT) (240)	
416	4-222-783-01	LEVER (LIFTER)	
417	4-221-530-01	LEVER (DETECTION C)	
418	4-985-672-01	SCREW (+PTPWH M2.6), FLOATING	
419	4-221-528-01	LEVER (DETECTION A)	
420	4-222-782-03	BASE (MAGNET), FITTING	
421	4-214-129-01	COVER	
422	1-675-723-21	IN SW BOARD	
423	X-4954-450-1	PULLEY (240) ASSY	
424	1-675-722-21	CONNECTOR BOARD	

6-5. CHASSIS (MOLD) ASSEMBLY SECTION (CDM53K-DVBU7)

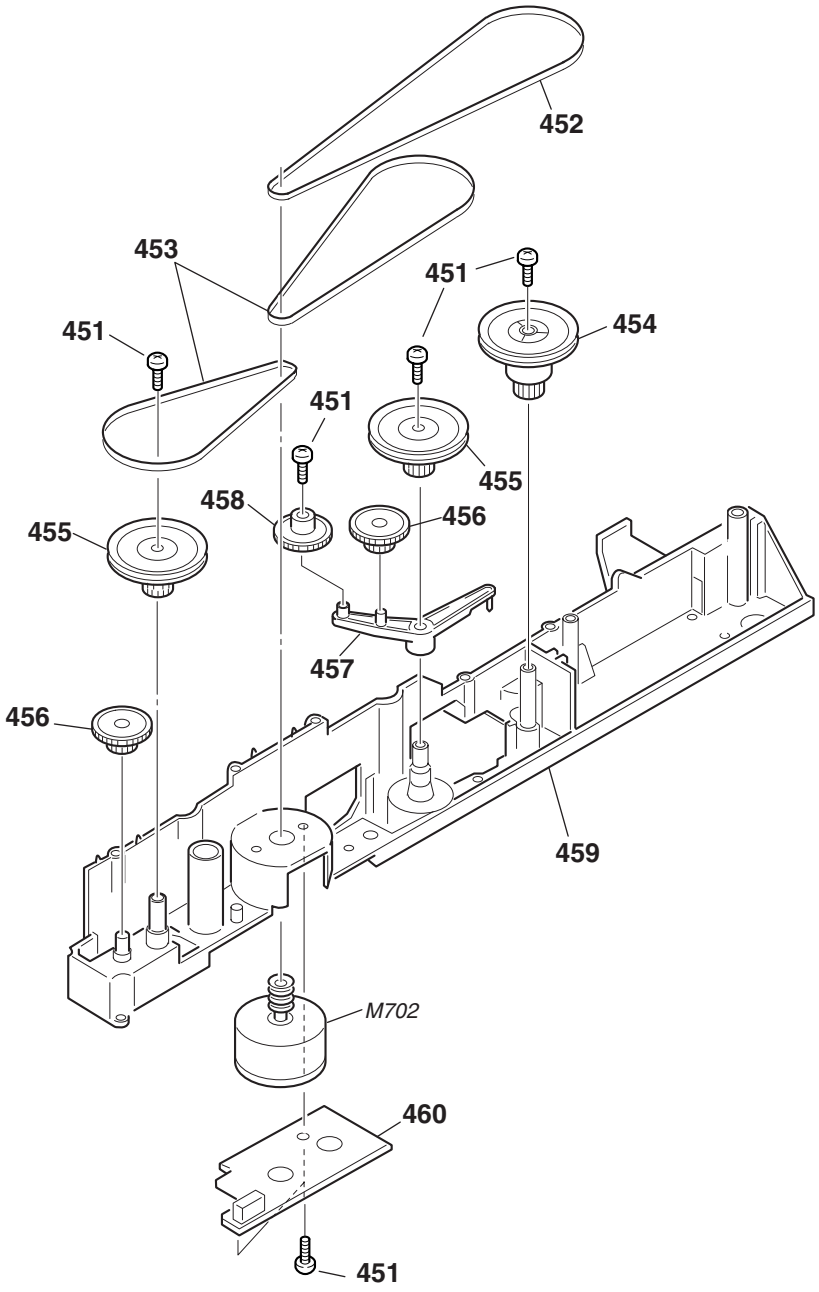

Ref. No.	Part No.	Description	Remark
451	4-951-620-41	SCREW (2.6), +BVTP	
452	4-211-235-01	BELT (COMMUNICATION)	
453	4-211-236-01	BELT (LOADING)	
454	4-211-231-01	PULLEY (MODE)	
455	4-211-214-01	PULLEY (LD)	

Ref. No.	Part No.	Description	Remark
456	4-211-227-01	GEAR (LD DECELERATION)	
457	4-211-228-01	LEVER (GOOSENECK)	
458	4-214-130-01	GEAR (TRAY)	
459	4-211-209-11	CHASSIS (MOLD B)	
460	1-675-728-21	LOAD MOTOR BOARD	
M702	X-4950-342-1	MOTOR (LOADING) ASSY	

6-6. CHASSIS SECTION (CDM53K-DVBU7)

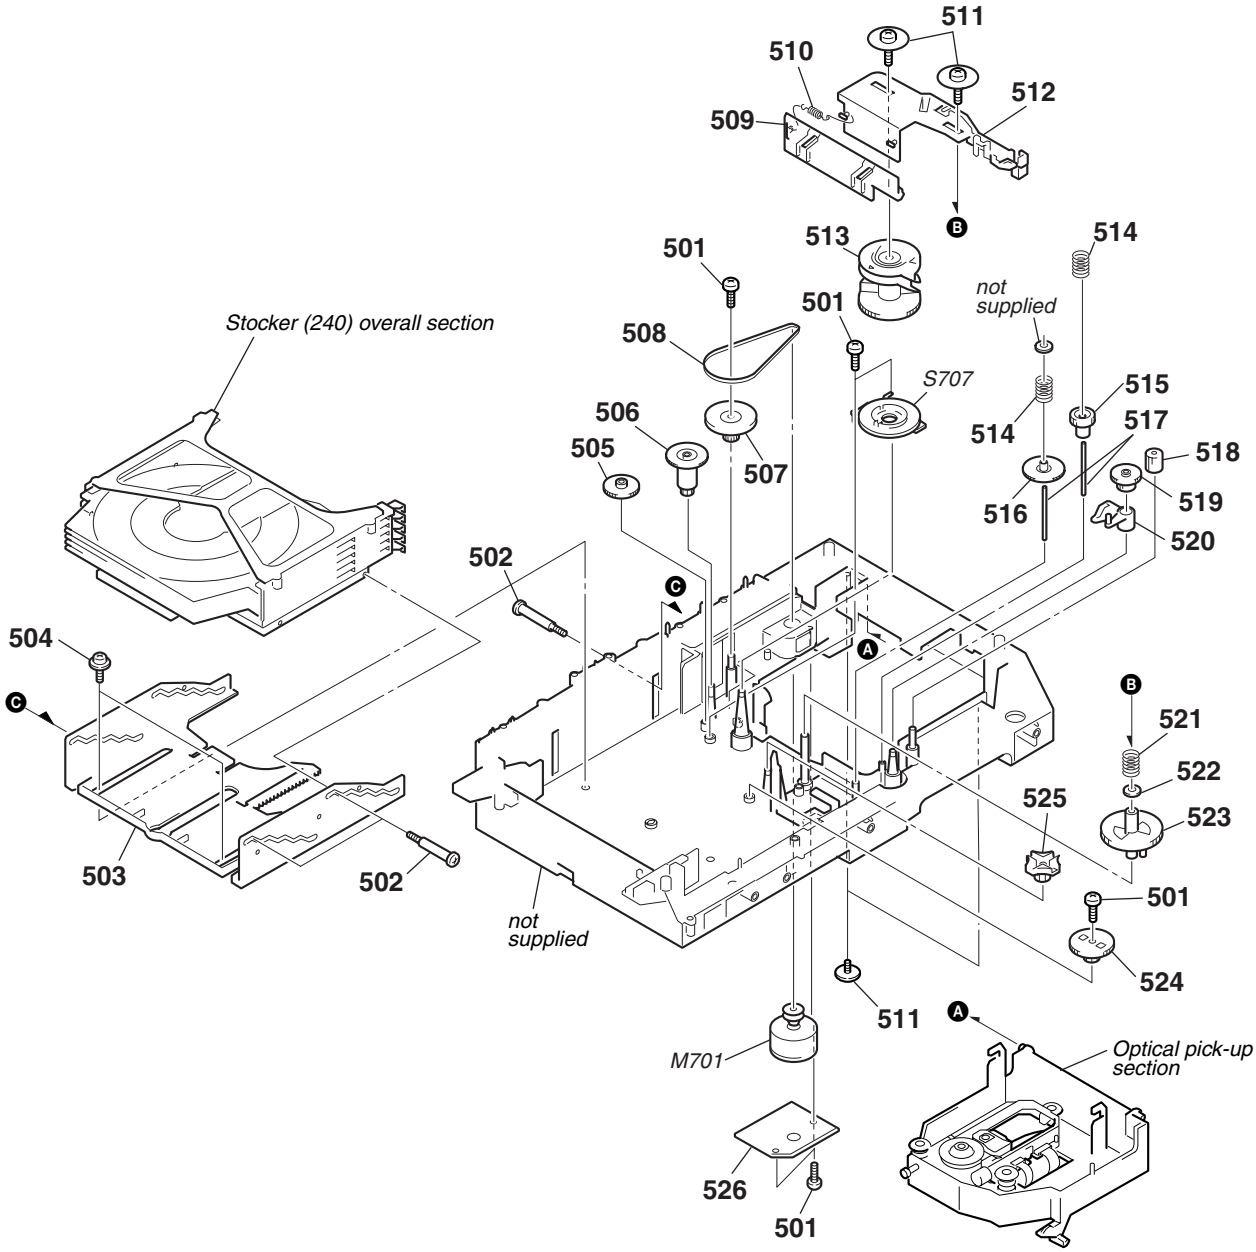

Ref. No.	Part No.	Description	Remark
501	4-951-620-41	SCREW (2.6), +BVTP	
502	4-230-548-11	SCREW (J), STEP	
503	4-211-223-01	SLIDER (U/D)	
504	4-933-134-01	SCREW (+PTPWH M2.6X6)	
505	4-211-215-01	GEAR (EJECT)	
506	4-211-232-01	GEAR (MODE DECELERATION)	
507	4-211-214-01	PULLEY (LD)	
508	4-211-237-01	BELT (MODE)	
509	4-212-677-01	SLIDER (SHUTTER)	
510	4-212-678-01	SPRING (SHUTTER), TENSION	
511	4-985-672-01	SCREW (+PTPWH M2.6), FLOATING	
512	4-211-233-01	SLIDER (SELECTION)	
513	4-211-230-01	GEAR (CHUCKING)	
514	4-211-245-01	SPRING, COMPRESSION	
515	4-211-221-01	GEAR (LD MOVABLE)	

Ref. No.	Part No.	Description	Remark
516	4-211-217-01	GEAR (SELECTION)	
517	4-211-242-01	SHAFT (SELECTION GEAR)	
518	4-211-240-01	GEAR (LD DECELERATION B)	
519	4-211-216-01	GEAR (RELAY)	
520	4-211-241-01	LEVER (SELECTION)	
521	4-216-879-01	SPRING (GEAR A), COMPRESSION	
522	3-701-446-21	WASHER, 8	
523	4-211-218-01	GEAR (GEAR A)	
524	4-211-220-01	GEAR (U/D SLIDER)	
525	4-211-219-01	GEAR (GEAR B)	
526	1-675-729-21	CLAMP MOTOR BOARD	
M701	X-4950-341-1	MOTOR (CLAMP) ASSY	
S707	1-418-045-01	ENCODER, ROTARY (DISC TRAY ADDRESS DETECT)	

6-7. STOCKER (240) OVERALL, OPTICAL PICK-UP SECTION (CDM53K-DVBU7)

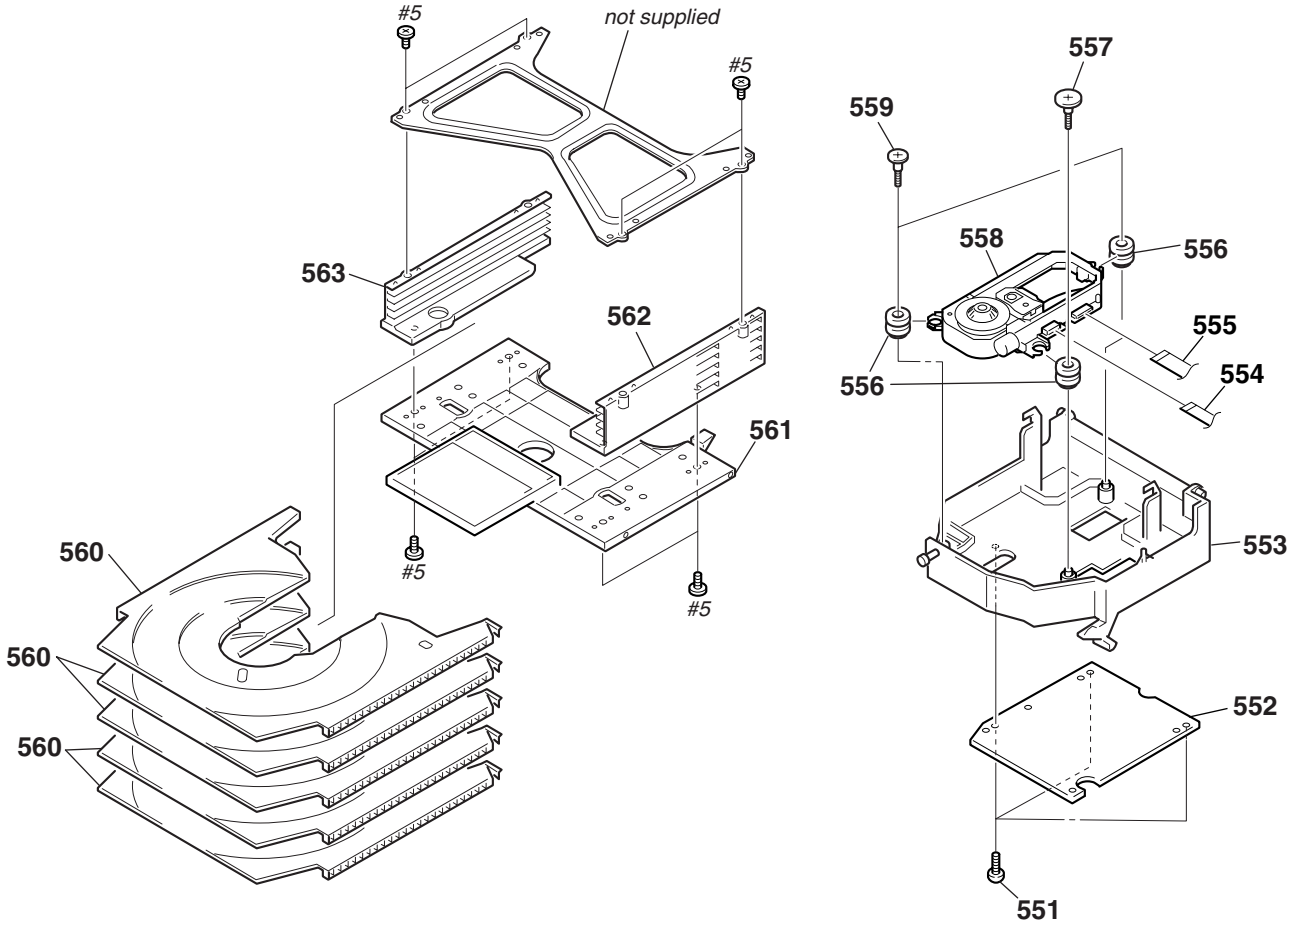

Ref. No.	Part No.	Description	Remark
551	4-951-620-41	SCREW (2.6), +BVTP	
552	A-4726-883-A	RF-240 BOARD, COMPLETE	
553	X-4953-742-1	HOLDER (240) ASSY	
554	1-823-085-11	CABLE, FLEXIBLE FLAT (9 CORE)	
555	1-823-072-11	CABLE, FLEXIBLE FLAT 26P	
556	3-053-847-11	INSULATOR	
557	4-236-450-01	SCREW (L), STEP	
⚠558	8-820-144-06	OPTICAL PICK-UP KHM-240AAA	
559	4-236-579-01	SCREW (S), STEP	
560	4-234-047-01	TRAY (240)	
561	4-221-504-01	BASE (STOCKER), FITTING	
562	4-211-211-01	STOCKER (R)	
563	4-211-210-01	STOCKER (L)	

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

AMP

SECTION 7
ELECTRICAL PARTS LIST

Note:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
  All resistors are in ohms
  METAL: Metal-film resistor
  METAL OXIDE: Metal Oxide-film resistor
  F : nonflammable
- SEMICONDUCTORS
  In each case, u: µ , for example:
  uA...: µA..., uPA...: µPA..., uPB...: µPB..., uPC...: µPC..., uPD...: µPD...
- CAPACITORS
  uF : µF
- COILS
  uH : µH
- Abbreviation
  AUS : Australian model
  CND : Canadian model
  HK : Hong Kong model
  MX : Mexican model
  MY : Malaysia model
  SP : Singapole model

When indicating parts by reference number, please include the board name.

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque ⚠ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description			Remark
	A-4726-386-A	AMP BOARD, COMPLETE (C700:US)			
	A-4726-816-A	AMP BOARD, COMPLETE (C700:CND, MX)			
	A-4726-915-A	AMP BOARD, COMPLETE (C900)			
	A-4727-013-A	AMP BOARD, COMPLETE			
					(AEP, UK, E, MY, SP, HK, AUS)
		**********			
	7-685-546-14	SCREW +BTP 3X8 TYPE2 N-S			
	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S			
		< CAPACITOR >			
C300	1-126-953-11	ELECT	2200uF	20.00%	35V (US, CND)
C300	1-126-973-11	ELECT	2200uF	20.00%	50V (EXCEPT US, CND)
C301	1-126-965-11	ELECT	22uF	20.00%	50V
C302	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C303	1-136-157-00	FILM	0.022uF	5%	50V
C304	1-136-157-00	FILM	0.022uF	5%	50V
C305	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C305	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C306	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C307	1-162-923-11	CERAMIC CHIP	47PF	5%	50V (US)
C307	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V (EXCEPT US)
C308	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C309	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C310	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C311	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C312	1-104-665-11	ELECT	100uF	20.00%	10V
C313	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C313	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C316	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V
C317	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C317	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C318	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C318	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C319	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C319	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C320	1-104-665-11	ELECT	100uF	20.00%	10V
C323	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C324	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C325	1-104-665-11	ELECT	100uF	20.00%	10V
C326	1-126-947-11	ELECT	47uF	20.00%	10V
C327	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C328	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C328	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C329	1-126-934-11	ELECT	220uF	20.00%	10V
C330	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C331	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C331	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C332	1-136-157-00	FILM	0.022uF	5%	50V
C333	1-136-157-00	FILM	0.022uF	5%	50V
C334	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C334	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C335	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C335	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C336	1-104-665-11	ELECT	100uF	20.00%	10V
C337	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C337	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C341	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V
C342	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C342	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C343	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C343	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C344	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C345	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C345	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C348	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C349	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C350	1-104-665-11	ELECT	100uF	20.00%	10V
C351	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C351	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C352	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V

Ref. No.	Part No.	Description			Remarks
C353	1-136-157-00	FILM	0.022uF	5%	50V
C354	1-136-157-00	FILM	0.022uF	5%	50V
C355	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C355	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C356	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C356	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C357	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C357	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C358	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C359	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C362	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C362	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C363	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V
C364	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C364	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C365	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C365	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C368	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C368	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C372	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C372	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C373	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C374	1-136-157-00	FILM	0.022uF	5%	50V
C375	1-136-157-00	FILM	0.022uF	5%	50V
C376	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C376	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C377	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C377	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C378	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C378	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C381	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C381	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C382	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V
C383	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C383	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C384	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C384	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C387	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C388	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C389	1-104-665-11	ELECT	100uF	20.00%	10V
C390	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C391	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C392	1-104-665-11	ELECT	100uF	20.00%	10V
C393	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C394	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C394	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C395	1-136-157-00	FILM	0.022uF	5%	50V
C396	1-136-157-00	FILM	0.022uF	5%	50V
C397	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C397	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C398	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C398	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C399	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C399	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C402	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V
C403	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C403	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C404	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C404	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C405	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C405	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C408	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C408	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C409	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C410	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US, CND)
C410	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US, CND)
C411	1-136-157-00	FILM	0.022uF	5%	50V
C412	1-136-157-00	FILM	0.022uF	5%	50V
C413	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C413	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C414	1-136-165-00	FILM	0.1uF	5%	50V (US, CND)
C414	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V (EXCEPT US, CND)
C415	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C416	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C419	1-163-021-11	CERAMIC CHIP	0.01uF	10.00%	50V

AMP

Ref. No.	Part No.	Description			Remarks
C420	1-126-948-11	ELECT	100uF	20.00%	35V (US, CND)
C420	1-126-968-11	ELECT	100uF	20.00%	50V (EXCEPT US, CND)
C421	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V (US)
C421	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V (EXCEPT US)
C422	1-104-665-11	ELECT	100uF	20.00%	10V (US, CND)
C422	1-136-165-00	FILM	0.1uF	5%	50V (EXCEPT US, CND)
C425	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C432	1-162-915-11	CERAMIC CHIP	10PF	0.5PF	50V
C433	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V (US, CND, MX)
C434	1-162-927-11	CERAMIC CHIP	100PF	5%	50V (US, CND, MX)
C435	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C436	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C437	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C438	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C439	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C440	1-163-019-00	CERAMIC CHIP	0.0068uF	10%	50V (US, CND, MX)
C451	1-131-704-11	FILM	1uF	5%	50V (C700)
C451	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C452	1-131-704-11	FILM	1uF	5%	50V (C700)
C452	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C453	1-131-704-11	FILM	1uF	5%	50V (C700)
C453	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C454	1-131-704-11	FILM	1uF	5%	50V (C700)
C454	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C455	1-131-704-11	FILM	1uF	5%	50V (C700)
C455	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C456	1-131-704-11	FILM	1uF	5%	50V (C700)
C456	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C457	1-131-704-11	FILM	1uF	5%	50V (C700)
C457	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C458	1-131-704-11	FILM	1uF	5%	50V (C700)
C458	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C459	1-131-704-11	FILM	1uF	5%	50V (C700)
C459	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C460	1-131-704-11	FILM	1uF	5%	50V (C700)
C460	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C461	1-131-704-11	FILM	1uF	5%	50V (C700)
C461	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C462	1-131-704-11	FILM	1uF	5%	50V (C700)
C462	1-136-177-00	MYLAR	1uF	5.00%	50V (C900)
C474	1-136-165-00	FILM	0.1uF	5%	50V
C484	1-126-935-11	CAP,ELECT	470uF	20.00%	16V

< CONNECTOR >

Ref. No.	Part No.	Description	Remarks
CN301	1-779-280-11	CONNECTOR,FFC(LIF(NON-ZIF))12P	
CN305	1-793-600-11	CONNECTOR, FFC/FPC (ZIF) 17P	
* CN309	1-506-987-11	PIN, CONNECTOR (PC BOARD) 5P	(US, CND, MX)
* CN309	1-568-954-11	PIN, CONNECTOR 5P	(EXCEPT US, CND, MX)

< DIODE >

Ref. No.	Part No.	Description
D310	6-500-075-01	DIODE LI136V
D310	8-719-073-82	DIODE SFPB-76V
D311	6-500-075-01	DIODE LI136V
D311	8-719-073-82	DIODE SFPB-76V
D312	6-500-075-01	DIODE LI136V
D312	8-719-073-82	DIODE SFPB-76V
D313	6-500-075-01	DIODE LI136V
D313	8-719-073-82	DIODE SFPB-76V
D314	6-500-075-01	DIODE LI136V
D314	8-719-073-82	DIODE SFPB-76V
D315	6-500-075-01	DIODE LI136V
D315	8-719-073-82	DIODE SFPB-76V
D320	6-500-075-01	DIODE LI136V
D320	8-719-073-82	DIODE SFPB-76V
D321	6-500-075-01	DIODE LI136V
D321	8-719-073-82	DIODE SFPB-76V
D322	6-500-075-01	DIODE LI136V
D322	8-719-073-82	DIODE SFPB-76V
D323	6-500-075-01	DIODE LI136V
D323	8-719-073-82	DIODE SFPB-76V
D324	6-500-075-01	DIODE LI136V
D324	8-719-073-82	DIODE SFPB-76V
D325	6-500-075-01	DIODE LI136V
D325	8-719-073-82	DIODE SFPB-76V
D330	6-500-075-01	DIODE LI136V
D330	8-719-073-82	DIODE SFPB-76V
D331	6-500-075-01	DIODE LI136V
D331	8-719-073-82	DIODE SFPB-76V
D332	6-500-075-01	DIODE LI136V
D332	8-719-073-82	DIODE SFPB-76V
D333	6-500-075-01	DIODE LI136V
D333	8-719-073-82	DIODE SFPB-76V
D334	6-500-075-01	DIODE LI136V
D334	8-719-073-82	DIODE SFPB-76V
D335	6-500-075-01	DIODE LI136V
D335	8-719-073-82	DIODE SFPB-76V
D340	6-500-075-01	DIODE LI136V
D340	8-719-073-82	DIODE SFPB-76V
D341	6-500-075-01	DIODE LI136V
D341	8-719-073-82	DIODE SFPB-76V

Ref. No.	Part No.	Description	Remarks
D342	6-500-075-01	DIODE LI136V	
D342	8-719-073-82	DIODE SFPB-76V	
D343	6-500-075-01	DIODE LI136V	
D343	8-719-073-82	DIODE SFPB-76V	
D344	6-500-075-01	DIODE LI136V	
D344	8-719-073-82	DIODE SFPB-76V	
D345	6-500-075-01	DIODE LI136V	
D345	8-719-073-82	DIODE SFPB-76V	
D351	8-719-404-50	DIODE MA111-TX (US, CND, MX)	
D370	6-500-060-01	DIODE P6SMB36AT3	
D371	6-500-060-01	DIODE P6SMB36AT3	
D372	6-500-060-01	DIODE P6SMB36AT3	
D373	6-500-060-01	DIODE P6SMB36AT3	
D374	6-500-060-01	DIODE P6SMB36AT3	
D375	6-500-060-01	DIODE P6SMB36AT3	
D380	6-500-060-01	DIODE P6SMB36AT3	
D381	6-500-060-01	DIODE P6SMB36AT3	
D382	6-500-060-01	DIODE P6SMB36AT3	
D383	6-500-060-01	DIODE P6SMB36AT3	
D384	6-500-060-01	DIODE P6SMB36AT3	
D385	6-500-060-01	DIODE P6SMB36AT3	
		< EARTH >	
EB301	1-537-770-11	TERMINAL BOARD, GROUND	
EB302	1-537-770-11	TERMINAL BOARD, GROUND	
		< FERRITE BEAD >	
FB300	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB301	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB303	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB304	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB307	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB308	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB309	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB312	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB313	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB314	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB315	1-469-760-21	INDUCTOR 0uH (US, CND, MX)	
FB318	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB320	1-400-160-51	INDUCTOR 0uH (US, CND, MX)	
FB365	1-400-160-51	INDUCTOR 0uH	
		< IC >	
IC300	8-759-834-29	IC MC74VHC1G04DFT1	
IC301	6-700-277-01	IC CXD9646Z	
IC302	8-759-533-85	IC BA05FP-E2	
IC303	8-759-583-47	IC uPC2933T-E2	
IC304	6-700-277-01	IC CXD9646Z	
IC305	6-700-279-01	IC CXD9634AQ	
IC306	6-700-277-01	IC CXD9646Z	
IC307	6-700-277-01	IC CXD9646Z	
IC308	6-700-279-01	IC CXD9634AQ	
IC309	6-700-277-01	IC CXD9646Z	
IC310	6-700-279-01	IC CXD9634AQ	
IC311	6-700-277-01	IC CXD9646Z	
IC312	8-759-834-30	IC MC74VHC1G08DFT1	
		< JACK >	
J401	1-694-656-11	TERMINAL BOARD (6CH SPEAKER)	

Ref. No.	Part No.	Description	Remarks
		< COIL >	
L300	1-469-525-91	INDUCTOR 10uH	
L302	1-412-939-11	INDUCTOR 1uH (US, CND, MX)	
L302	1-412-940-21	INDUCTOR 1.2uH (EXCEPT US, CND, MX)	
L401	1-424-777-11	INDUCTOR 10uH	
L402	1-424-777-11	INDUCTOR 10uH	
L403	1-424-777-11	INDUCTOR 10uH	
L404	1-424-777-11	INDUCTOR 10uH	
L405	1-424-777-11	INDUCTOR 10uH	
L406	1-424-777-11	INDUCTOR 10uH	
		< TRANSISTOR >	
Q301	8-729-119-78	TRANSISTOR 2SC2785TP-HFE (US, CND, MX)	
		< RESISTOR >	
R300	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R301	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R302	1-216-857-11	METAL CHIP 1M 5% 1/16W	
R303	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R304	1-216-801-11	METAL CHIP 22 5% 1/16W	
R305	1-216-801-11	METAL CHIP 22 5% 1/16W	
R307	1-216-801-11	METAL CHIP 22 5% 1/16W	
R308	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R309	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R310	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R311	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R312	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R313	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R315	1-216-809-11	METAL CHIP 100 5% 1/16W	
R316	1-216-809-11	METAL CHIP 100 5% 1/16W	
R317	1-216-809-11	METAL CHIP 100 5% 1/16W	
R318	1-216-809-11	METAL CHIP 100 5% 1/16W	
R319	1-216-809-11	METAL CHIP 100 5% 1/16W	
R320	1-216-801-11	METAL CHIP 22 5% 1/16W	
R321	1-216-801-11	METAL CHIP 22 5% 1/16W	
R322	1-216-803-11	METAL CHIP 33 5% 1/16W	
R325	1-216-801-11	METAL CHIP 22 5% 1/16W	
R330	1-216-801-11	METAL CHIP 22 5% 1/16W	
R333	1-216-801-11	METAL CHIP 22 5% 1/16W	
R334	1-216-820-11	METAL CHIP 820 5% 1/16W	
R335	1-216-801-11	METAL CHIP 22 5% 1/16W	
R336	1-216-820-11	METAL CHIP 820 5% 1/16W	
R337	1-216-833-11	METAL CHIP 10K 5% 1/16W	
R338	1-216-820-11	METAL CHIP 820 5% 1/16W	
R339	1-216-814-11	METAL CHIP 270 5% 1/16W	
R340	1-216-814-11	METAL CHIP 270 5% 1/16W	
R341	1-216-814-11	METAL CHIP 270 5% 1/16W	
R342	1-216-814-11	METAL CHIP 270 5% 1/16W	
R343	1-216-801-11	METAL CHIP 22 5% 1/16W	
R344	1-216-814-11	METAL CHIP 270 5% 1/16W	
R346	1-216-295-00	SHORT 0	
R347	1-216-295-00	SHORT 0	
R348	1-216-801-11	METAL CHIP 22 5% 1/16W	
R349	1-216-801-11	METAL CHIP 22 5% 1/16W	
R350	1-216-801-11	METAL CHIP 22 5% 1/16W	
R401	1-216-049-11	RES-CHIP 1K 5% 1/10W	
R402	1-216-049-11	RES-CHIP 1K 5% 1/10W	
R415	1-216-295-00	SHORT 0	

AMP **COMPONENT** **CONNECTOR** **CLAMP MOTOR** **DDCON-1089**

Ref. No.	Part No.	Description			Remarks
		< RELAY >			
RY301	1-515-920-11	RELAY (24V) (US, CND)			
RY301	1-755-170-11	RELAY (12V) (EXCEPT US, CND)			
RY302	1-515-920-11	RELAY (24V) (US, CND)			
RY302	1-755-170-11	RELAY (12V) (EXCEPT US, CND)			
RY303	1-515-920-11	RELAY (24V) (US, CND)			
RY303	1-755-170-11	RELAY (12V) (EXCEPT US, CND)			
		< VIBRATOR >			
X300	1-795-286-21	VIBRATOR, CRYSTAL (49.152MHz)			
**********					
	1-683-013-11	COMPONENT BOARD			
		**********			
		< CAPACITOR >			
C742	1-126-933-11	ELECT	100uF	20.00% 16V	
C743	1-128-551-11	ELECT	22uF	20.00% 25V	
C744	1-126-933-11	ELECT	100uF	20.00% 16V	
C745	1-128-551-11	ELECT	22uF	20.00% 25V	
C746	1-126-933-11	ELECT	100uF	20.00% 16V	
C747	1-128-551-11	ELECT	22uF	20.00% 25V	
C758	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	
C759	1-126-933-11	ELECT	100uF	20.00% 16V	
		< CONNECTOR >			
* CN702	1-568-944-11	PIN, CONNECTOR 6P			
		< IC >			
IC703	8-759-522-11	IC BA7660FS-E2			
		< JACK >			
J666	1-815-814-11	JACK, PIN 3P (COMPONENT VIDEO OUT)			
		< RESISTOR >			
R729	1-218-285-11	RES-CHIP	75	5% 1/16W	
R730	1-218-285-11	RES-CHIP	75	5% 1/16W	
R731	1-218-285-11	RES-CHIP	75	5% 1/16W	
**********					
	1-675-722-21	CONNECTOR BOARD			
		**********			
		< CONNECTOR >			
CN701	1-770-169-11	CONNECTOR, FFC/FPC 17P			
		< TRANSISTOR >			
Q701	8-729-029-66	TRANSISTOR	RT1N141S-TP		
		< RESISTOR >			
R707	1-249-424-11	CARBON	3.9K	5% 1/4W	F
R708	1-249-417-11	CARBON	1K	5% 1/4W	F
R709	1-249-429-11	CARBON	10K	5% 1/4W	
**********					

Ref. No.	Part No.	Description			Remarks
	1-675-729-21	CLAMP MOTOR BOARD			
		**********			
		< CAPACITOR >			
C701	1-162-306-11	CERAMIC	0.01uF	30.00% 16V	
C702	1-126-964-11	ELECT	10uF	20.00% 50V	
C706	1-162-306-11	CERAMIC	0.01uF	30.00% 16V	
C711	1-162-306-11	CERAMIC	0.01uF	30.00% 16V	
		< CONNECTOR >			
* CN712	1-568-954-11	PIN, CONNECTOR 5P			
		< DIODE >			
D701	8-719-109-69	DIODE MTZJ-T-77-3.6B			
		< IC >			
IC701	8-759-633-65	IC M54641L			
		< RESISTOR >			
R701	1-249-411-11	CARBON	330	5% 1/4W	
R702	1-249-401-11	CARBON	47	5% 1/4W	F
**********					
	1-681-998-11	DDCON-1089 BOARD			
		**********			
		< CAPACITOR >			
C820	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	
C821	1-126-964-11	ELECT	10uF	20.00% 50V	
C822	1-164-360-11	CERAMIC CHIP	0.1uF	16V	
C823	1-126-964-11	ELECT	10uF	20.00% 50V	
C826	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	
		< CONNECTOR >			
* CN806	1-568-943-11	PIN, CONNECTOR 5P			
		< DIODE >			
D806	8-719-404-50	DIODE MA111-TX			
D807	8-719-404-50	DIODE MA111-TX			
D808	8-719-404-50	DIODE MA111-TX			
D809	8-719-404-50	DIODE MA111-TX			
D810	8-719-069-56	DIODE UDZSTE-176.2B			
		< COIL >			
L801	1-412-959-11	INDUCTOR	47uH		
		< TRANSISTOR >			
Q803	8-729-808-42	TRANSISTOR	2SD1624-T-TD		
Q804	8-729-808-42	TRANSISTOR	2SD1624-T-TD		
		< RESISTOR >			
R850	1-216-828-11	METAL CHIP	3.9K	5% 1/16W	
R855	1-216-809-11	METAL CHIP	100	5% 1/16W	
R874	1-216-839-11	METAL CHIP	33K	5% 1/16W	
		< TRANSFORMER >			
⚠T801	1-437-416-11	TRANSFORMER, DC-DC CONVERTER			
**********					

Ref. No.	Part No.	Description	Remarks
	A-4726-385-A	DS-1089 BOARD, COMPLETE (C700:US, C900)	
	A-4726-822-A	DS-1089 BOARD, COMPLETE (C700:CND, AEP, UK, E, MY, SP, HK, MX, AUS)	
		**********	
	4-234-932-01	BUTTON (DVD)	
	4-931-757-31	SCREW(DIA.2.6X8)(IT3B),TAPPING	
		< CONNECTOR >	
* CN811	1-568-950-11	PIN, CONNECTOR 12P	
		< DIODE >	
D801	8-719-057-29	DIODE SML78423C-TP15 (DISC 1)	
D802	8-719-057-29	DIODE SML78423C-TP15 (DISC 2)	
D803	8-719-057-29	DIODE SML78423C-TP15 (DISC 3)	
D804	8-719-057-29	DIODE SML78423C-TP15 (DISC 4)	
D805	8-719-057-29	DIODE SML78423C-TP15 (DISC 5)	
		< RESISTOR >	
R816	1-216-811-11	METAL CHIP 150 5% 1/16W	
R817	1-216-811-11	METAL CHIP 150 5% 1/16W	
R818	1-216-811-11	METAL CHIP 150 5% 1/16W	
R819	1-216-811-11	METAL CHIP 150 5% 1/16W	
R820	1-216-811-11	METAL CHIP 150 5% 1/16W	
R821	1-216-811-11	METAL CHIP 150 5% 1/16W	
R822	1-216-811-11	METAL CHIP 150 5% 1/16W	
R823	1-216-811-11	METAL CHIP 150 5% 1/16W	
R824	1-216-811-11	METAL CHIP 150 5% 1/16W	
R825	1-216-811-11	METAL CHIP 150 5% 1/16W	
R826	1-216-841-11	METAL CHIP 47K 5% 1/16W	
R827	1-216-835-11	METAL CHIP 15K 5% 1/16W	
R828	1-216-832-11	METAL CHIP 8.2K 5% 1/16W	
R829	1-216-826-11	METAL CHIP 2.7K 5% 1/16W	(US, CND)
R829	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	(EXCEPT US, CND)
R830	1-216-827-11	METAL CHIP 3.3K 5% 1/16W	
R831	1-216-829-11	METAL CHIP 4.7K 5% 1/16W	
R832	1-216-824-11	METAL CHIP 1.8K 5% 1/16W	
R833	1-216-823-11	METAL CHIP 1.5K 5% 1/16W	
R834	1-216-821-11	METAL CHIP 1K 5% 1/16W	
R835	1-216-809-11	METAL CHIP 100 5% 1/16W	
		< SWITCH >	
S811	1-571-760-11	SWITCH, KEY BOARD (DISC 1)	
S812	1-571-760-11	SWITCH, KEY BOARD (⏏)	
S813	1-571-760-11	SWITCH, KEY BOARD (DISC 2)	
S814	1-571-760-11	SWITCH, KEY BOARD (⏏)	
S815	1-571-760-11	SWITCH, KEY BOARD (DISC 3)	
S816	1-571-760-11	SWITCH, KEY BOARD (⏏)	
S817	1-571-760-11	SWITCH, KEY BOARD (DISC 4)	
S818	1-571-760-11	SWITCH, KEY BOARD (⏏)	
S819	1-571-760-11	SWITCH, KEY BOARD (DISC 5)	
S820	1-571-760-11	SWITCH, KEY BOARD (⏏)	

****

Ref. No.	Part No.	Description	Remarks
	A-4726-913-A	DVD BOARD, COMPLETE (C900)	
	A-4726-938-A	DVD BOARD, COMPLETE (C700:US)	
	A-4726-940-A	DVD BOARD, COMPLETE (C700:CND)	
	A-4727-011-A	DVD BOARD, COMPLETE (AEP, UK)	
	A-4727-016-A	DVD BOARD, COMPLETE (HK, SP)	
	A-4727-018-A	DVD BOARD, COMPLETE (E, AUS)	
	A-4727-059-A	DVD BOARD, COMPLETE (MX)	
		**********	
		< CAPACITOR >	
C001	1-165-798-21	CAP, CHIP ELECT 100uF	
C003	1-126-206-11	ELECT CHIP 100uF 20% 6.3V	
C004	1-126-204-11	ELECT CHIP 47uF 20% 16V	
C005	1-126-246-11	ELECT CHIP 220uF 20% 4V	
C006	1-126-204-11	ELECT CHIP 47uF 20% 16V	
C007	1-164-850-11	CERAMIC CHIP 10PF 0.50PF 16V	
C008	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C009	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C010	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C011	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C012	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C013	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C014	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C015	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C016	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C017	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C018	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C019	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C103	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C104	1-126-209-11	ELECT CHIP 100uF 20.00% 4V	
C105	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C106	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C107	1-164-858-11	CERAMIC CHIP 22PF 5.00% 16V	(US, CND)
C107	1-164-852-11	CERAMIC CHIP 12PF 5.00% 16V	(EXCEPT US, CND)
C108	1-164-858-11	CERAMIC CHIP 22PF 5.00% 16V	(US, CND)
C108	1-164-852-11	CERAMIC CHIP 12PF 5.00% 16V	(EXCEPT US, CND)
C109	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C110	1-126-209-11	ELECT CHIP 100uF 20.00% 4V	
C111	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C112	1-107-820-11	CERAMIC CHIP 0.1uF 16V	
C113	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C114	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C116	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C119	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C124	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C201	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C202	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C203	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C204	1-164-947-11	CERAMIC CHIP 0.01uF 16V	
C205	1-164-947-11	CERAMIC CHIP 0.01uF 16V	

DVD

Ref. No.	Part No.	Description			Remarks
C206	1-164-850-11	CERAMIC CHIP	10PF		16V
C207	1-164-850-11	CERAMIC CHIP	10PF		16V
C304	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C305	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C306	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V
C307	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C309	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V
C310	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V
C311	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V
C312	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C313	1-127-772-11	CERAMIC CHIP	33000PF	10%	10V
C315	1-164-874-11	CERAMIC CHIP	100PF	5.00%	16V
C317	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C318	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C319	1-137-987-81	CERAMIC CHIP	0.068uF	10%	10V
C320	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C321	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C322	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C323	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C324	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C325	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C326	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C327	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C328	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C331	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C332	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C333	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C334	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C335	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C336	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C337	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C338	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C339	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C340	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C341	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C342	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C343	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C344	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C345	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C346	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V
C347	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C348	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C349	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C350	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C351	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C352	1-126-204-11	ELECT CHIP	47uF	20%	16V
C401	1-127-988-11	CERAMIC CHIP	15000PF	10%	16V
C402	1-164-882-11	CERAMIC CHIP	220PF	5.00%	16V
C403	1-164-874-11	CERAMIC CHIP	100PF	5.00%	16V
C404	1-164-938-11	CERAMIC CHIP	0.0015uF	10.00%	16V
C405	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C406	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C407	1-164-882-11	CERAMIC CHIP	220PF	5.00%	16V
C408	1-164-874-11	CERAMIC CHIP	100PF	5.00%	16V
C411	1-164-941-11	CERAMIC CHIP	0.0047uF	10.00%	16V

Ref. No.	Part No.	Description			Remarks
C412	1-127-772-11	CERAMIC CHIP	33000PF	10%	10V
C413	1-127-772-11	CERAMIC CHIP	33000PF	10%	10V
C414	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C415	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C416	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C417	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C418	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C419	1-126-204-11	ELECT CHIP	47uF	20%	16V
C420	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C421	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C429	1-164-937-11	CERAMIC CHIP	0.001uF	10.00%	16V (US, CND, MX)
C430	1-164-937-11	CERAMIC CHIP	0.001uF	10.00%	16V (US, CND, MX)
C501	1-126-193-11	ELECT	1uF	20%	50V
C502	1-117-370-11	CERAMIC CHIP	10uF		10V
C504	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C506	1-117-370-11	CERAMIC CHIP	10uF		10V
C508	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C509	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C510	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C511	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C512	1-126-246-11	ELECT CHIP	220uF	20%	4V
C513	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C514	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C516	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C518	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C519	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C520	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C521	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C522	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C523	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C524	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C525	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C526	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C529	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C530	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C531	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C532	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C533	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C534	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C535	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C536	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C537	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C538	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C539	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C540	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C541	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C542	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C545	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C546	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C547	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C552	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C600	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C601	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C602	1-117-681-11	ELECT CHIP	100uF	20.00%	16V
C603	1-164-858-11	CERAMIC CHIP	22PF	5.00%	16V

Ref. No.	Part No.	Description			Remarks
C604	1-164-868-11	CERAMIC CHIP	56PF	5.00%	16V
C605	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C606	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C607	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C608	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C609	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C610	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C611	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C612	1-117-370-11	CERAMIC CHIP	10uF		10V
C613	1-117-370-11	CERAMIC CHIP	10uF		10V
C614	1-124-779-00	ELECT CHIP	10uF	20%	16V
C615	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C616	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C617	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C618	1-124-779-00	ELECT CHIP	10uF	20%	16V
C619	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C620	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C621	1-164-935-11	CERAMIC CHIP	470PF	10.00%	16V
C622	1-124-779-00	ELECT CHIP	10uF	20%	16V
C623	1-164-850-11	CERAMIC CHIP	10PF		16V
C624	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C625	1-124-779-00	ELECT CHIP	10uF	20%	16V
C626	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C627	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C628	1-124-779-00	ELECT CHIP	10uF	20%	16V
C629	1-164-935-11	CERAMIC CHIP	470PF	10.00%	16V
C630	1-117-370-11	CERAMIC CHIP	10uF		10V
C631	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C632	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C633	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C634	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C635	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C636	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C637	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C638	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C639	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C640	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C641	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C642	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C643	1-126-246-11	ELECT CHIP	220uF	20%	4V (C700:US, CND, MX)
C643	1-136-169-00	MYLAR	0.22uF	5.00%	50V (C900)
C643	1-126-205-11	ELECT CHIP	47uF	20%	6.3V (C700:AEP, UK, E, MY, SP, HK, AUS)
C644	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C645	1-124-779-00	ELECT CHIP	10uF	20%	16V
C646	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C647	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C648	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C650	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C651	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C652	1-126-209-11	ELECT CHIP	100uF	20.00%	4V (US, CND, MX)
C653	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C654	1-117-681-11	ELECT CHIP	100uF	20.00%	16V
C656	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C657	1-117-370-11	CERAMIC CHIP	10uF		10V
C658	1-107-820-11	CERAMIC CHIP	0.1uF		16V

Ref. No.	Part No.	Description			Remarks
C659	1-124-779-00	ELECT CHIP	10uF	20%	16V
C660	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C661	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C662	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C663	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C664	1-124-779-00	ELECT CHIP	10uF	20%	16V
C665	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C666	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C667	1-117-370-11	CERAMIC CHIP	10uF		10V
C668	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C669	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C670	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C671	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C672	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C673	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C674	1-117-370-11	CERAMIC CHIP	10uF		10V
C675	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C676	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C677	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C679	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C801	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C802	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C804	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C808	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C812	1-126-209-11	ELECT CHIP	100uF	20.00%	4V
C814	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C815	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C816	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C817	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C819	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C820	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C821	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C822	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C823	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C824	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C825	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C826	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C827	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C828	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C829	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C830	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C831	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C832	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C833	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C834	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C835	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C836	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C837	1-117-370-11	CERAMIC CHIP	10uF		10V
C900	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C901	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C902	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C905	1-164-930-11	CERAMIC CHIP	330PF	5.00%	16V
C906	1-164-930-11	CERAMIC CHIP	330PF	5.00%	16V
C907	1-164-937-11	CERAMIC CHIP	0.001uF	10.00%	16V
C908	1-164-937-11	CERAMIC CHIP	0.001uF	10.00%	16V
C909	1-164-222-11	CERAMIC CHIP	0.22uF		25V
C910	1-104-905-11	CAPACITOR	0.22F		5.5V
C911	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C912	1-126-205-11	ELECT CHIP	47uF	20%	6.3V
C913	1-164-947-11	CERAMIC CHIP	0.01uF		16V

DVD

Ref. No.	Part No.	Description			Remarks
C914	1-164-947-11	CERAMIC CHIP	0.01uF		16V
C915	1-164-937-11	CERAMIC CHIP	0.001uF	10.00%	16V
C917	1-107-820-11	CERAMIC CHIP	0.1uF		16V
C918	1-164-874-11	CERAMIC CHIP	100PF	5.00%	16V
		< CONNECTOR >			
CN001	1-784-371-21	CONNECTOR, FFC/FPC 12P			
CN002	1-778-957-11	CONNECTOR, FFC/FPC 29P			
CN003	1-793-989-21	CONNECTOR, FFC/FPC 13P			
CN004	1-784-376-11	CONNECTOR, FFC/FPC 17P			
CN005	1-784-376-11	CONNECTOR, FFC/FPC 17P			
CN008	1-794-032-21	PIN, CONNECTOR			
CN009	1-784-368-21	CONNECTOR, FFC/FPC 9P			
CN010	1-784-382-21	CONNECTOR, FFC/FPC 25P			
CN101	1-784-367-11	CONNECTOR, FFC/FPC 8P			
* CN103	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P (US, CND)			
CN103	1-793-687-11	PIN, CONNECTOR (1.5MM) (SMD)5P (EXCEPT US,CND)			
CN201	1-784-376-11	CONNECTOR, FFC/FPC 17P			
* CN202	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P (US, CND)			
CN202	1-793-687-11	PIN, CONNECTOR (1.5MM) (SMD)5P (EXCEPT US,CND)			
* CN404	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P (US, CND)			
CN404	1-793-687-11	PIN, CONNECTOR (1.5MM) (SMD)5P (EXCEPT US,CND)			
CN900	1-784-367-11	CONNECTOR, FFC/FPC 8P			
		< DIODE >			
D900	8-719-053-18	DIODE 1SR154-400TE-25			
D901	8-719-053-18	DIODE 1SR154-400TE-25			
D902	8-719-988-61	DIODE 1SS355TE-17			
D903	8-719-988-61	DIODE 1SS355TE-17			
D904	8-719-988-61	DIODE 1SS355TE-17			
		< FERRITE BEAD >			
FB001	1-469-324-21	FERRITE	0uH		
FB002	1-469-324-21	FERRITE	0uH (EXCEPT US, CND, MX)		
FB003	1-469-324-21	FERRITE	0uH		
FB004	1-469-324-21	FERRITE	0uH (EXCEPT US, CND, MX)		
FB005	1-469-324-21	FERRITE	0uH		
FB006	1-469-324-21	FERRITE	0uH		
FB007	1-469-324-21	FERRITE	0uH		
FB008	1-469-324-21	FERRITE	0uH		
FB009	1-469-324-21	FERRITE	0uH		
FB010	1-469-324-21	FERRITE	0uH		
FB011	1-469-324-21	FERRITE	0uH		
FB012	1-469-324-21	FERRITE	0uH		
FB013	1-469-324-21	FERRITE	0uH		
FB014	1-469-324-21	FERRITE	0uH		
FB112	1-469-681-21	INDUCTOR	0uH		
FB603	1-469-324-21	FERRITE	0uH		
FB605	1-469-324-21	FERRITE	0uH		
FB901	1-469-324-21	FERRITE	0uH		
		< FILTER >			
FL003	1-234-177-11	FILTER, CHIP EMI			
FL004	1-234-177-11	FILTER, CHIP EMI			
FL005	1-233-893-21	FILTER, CHIP EMI			
FL006	1-234-177-11	FILTER, CHIP EMI			
FL101	1-233-893-21	FILTER, CHIP EMI			
FL102	1-233-893-21	FILTER, CHIP EMI			
FL103	1-233-893-21	FILTER, CHIP EMI			
FL201	1-233-893-21	FILTER, CHIP EMI			
FL202	1-233-893-21	FILTER, CHIP EMI			
FL203	1-234-177-11	FILTER, CHIP EMI			
FL501	1-233-893-21	FILTER, CHIP EMI			
FL502	1-233-893-21	FILTER, CHIP EMI			
FL505	1-234-177-11	FILTER, CHIP EMI			
FL603	1-234-177-11	FILTER, CHIP EMI			
FL604	1-234-177-11	FILTER, CHIP EMI			
FL605	1-234-177-11	FILTER, CHIP EMI			
FL606	1-234-177-11	FILTER, CHIP EMI			
FL801	1-233-893-21	FILTER, CHIP EMI			
FL802	1-233-893-21	FILTER, CHIP EMI			
FL803	1-233-893-21	FILTER, CHIP EMI			
		< IC >			
IC001	8-759-460-72	IC BA033FP-E2			
IC002	8-759-052-52	IC NJM78M05DL1A-TE1			
IC003	8-759-052-52	IC NJM78M05DL1A-TE1			
IC004	8-759-473-95	IC uPC2905T-E1 (EXCEPT MX)			
IC004	8-759-533-85	IC BA05FP-E2 (MX)			
IC005	8-759-460-72	IC BA033FP-E2			
IC006	6-700-398-01	IC uPC2918T-E1			
IC101	8-759-640-41	IC BR24C08F-E2			
IC102	8-759-831-81	IC IMIC6001BTD			
IC103	8-759-829-75	IC MB91307APFV-G-BND-E1			
IC106	6-700-785-01	IC SN74AHCT32PWR			
IC107	8-759-826-41	IC MBM29DL324BE-90PFTN			
IC108	6-800-439-01	IC MR27V1602E-P1TPZ (EXCEPT US, CND, MX)			
IC201	6-700-740-01	IC LC22004A-RJ6-TBM-E			
IC302	8-759-828-01	IC CXD9635R			
IC303	8-759-643-10	IC GM71V18160CT-6TR			
IC304	8-759-680-48	IC TC7WH157FK(TE85R)			
IC401	8-759-826-42	IC FAN8034			
IC501	8-759-832-30	IC TK71518ASCL			
IC503	8-752-399-55	IC CXD1933Q			
IC504	8-759-663-74	IC HY57V161610DTC-7TR			
IC505	8-759-663-74	IC HY57V161610DTC-7TR			
IC600	8-759-052-52	IC NJM78M05DL1A-TE1			
IC601	6-701-011-01	IC uPC2910T-E1			
IC602	8-759-560-56	IC PCM1800E/2K			
IC603	8-759-337-40	IC NJM2904V(TE2)			
IC604	6-700-983-01	IC IS61LV6416-15T(ICSI) (EXCEPT MX)			
IC604	8-759-827-81	IC IS61LV6416-15T(T&R) (MX)			
IC605	6-700-798-11	IC uPC2926T-1-E1			
IC606	8-759-825-15	IC LC89056W-E			
IC607	8-759-698-76	IC CXD9617R			
IC608	8-759-825-13	IC PCM1748E/2K			
IC610	8-759-337-40	IC NJM2904V(TE2)			
IC612	6-700-278-01	IC CXD9633Q			
IC801	8-752-407-50	IC CXD2752R			
IC802	8-759-585-52	IC SN74AHC1GU04DBVR			
IC803	8-759-832-53	IC W981616AH-7-EL10 (US, CND, MX)			
IC803	8-759-663-74	IC HY57V161610DTC-7TR (EXCEPT US, CND, MX)			
IC804	8-759-637-50	IC TA48M025F(TE16L)			
IC900	8-759-238-47	IC TC74HCT7007AF(EL)			

Ref. No.	Part No.	Description			Remarks
IC901	6-800-464-01	IC uPD703033AYGF-M27-3BA			
IC902	8-759-828-32	IC PT8300			
IC903	8-759-427-92	IC PST9126NL			
IC904	8-759-326-78	IC PST9140NL			
		< JUMPER RESISTOR >			
JW900	1-218-941-11	RES-CHIP	100	5%	1/16W
JW901	1-218-941-11	RES-CHIP	100	5%	1/16W
JW902	1-218-941-11	RES-CHIP	100	5%	1/16W
JW903	1-218-990-11	SHORT	0		
		< COIL >			
L600	1-414-754-11	INDUCTOR	10uH		
L601	1-414-754-11	INDUCTOR	10uH		
		< TRANSISTOR >			
Q001	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q002	8-729-101-07	TRANSISTOR	2SA1213Y-TE12L		
Q900	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
Q901	8-729-230-63	TRANSISTOR	2SD1819A-QRS-TX		
Q902	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
Q903	8-729-024-91	TRANSISTOR	2SC2712-GL-TE85L		
Q906	8-729-024-91	TRANSISTOR	2SC2712-GL-TE85L		
Q907	8-729-024-91	TRANSISTOR	2SC2712-GL-TE85L		
Q908	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q909	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q910	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
		< RESISTOR >			
R001	1-218-990-11	SHORT	0		
R002	1-218-990-11	SHORT	0		
R003	1-218-990-11	SHORT	0		
R004	1-218-990-11	SHORT	0		
R005	1-218-990-11	SHORT	0		
R006	1-218-990-11	SHORT	0		
R007	1-218-990-11	SHORT	0		
R008	1-218-990-11	SHORT	0		
R009	1-218-953-11	RES-CHIP	1K	5%	1/16W
R010	1-218-990-11	SHORT	0		
R011	1-218-953-11	RES-CHIP	1K	5%	1/16W
R012	1-218-990-11	SHORT	0		
R013	1-218-990-11	SHORT	0		
R014	1-218-990-11	SHORT	0		
R015	1-218-990-11	SHORT	0		
R016	1-218-990-11	SHORT	0		
R017	1-218-990-11	SHORT	0		
R018	1-218-990-11	SHORT	0		
R019	1-218-990-11	SHORT	0		
R020	1-218-990-11	SHORT	0		
R021	1-218-990-11	SHORT	0		
R022	1-218-990-11	SHORT	0 (AEP, UK)		
R023	1-218-990-11	SHORT	0		
R024	1-218-990-11	SHORT	0 (AEP, UK)		
R025	1-218-990-11	SHORT	0		

Ref. No.	Part No.	Description			Remarks
R026	1-218-990-11	SHORT	0		
R027	1-218-990-11	SHORT	0		
R028	1-218-990-11	SHORT	0		
R029	1-218-990-11	SHORT	0		
R030	1-218-990-11	SHORT	0		
R031	1-218-990-11	SHORT	0		
R032	1-218-990-11	SHORT	0		
R033	1-218-990-11	SHORT	0		
R034	1-218-990-11	SHORT	0		
R035	1-218-990-11	SHORT	0		
R036	1-218-990-11	SHORT	0		
R037	1-218-990-11	SHORT	0		
R038	1-218-990-11	SHORT	0		
R039	1-218-990-11	SHORT	0		
R040	1-218-990-11	SHORT	0		
R041	1-218-990-11	SHORT	0		
R042	1-218-990-11	SHORT	0		
R043	1-218-990-11	SHORT	0		
R044	1-218-990-11	SHORT	0		
R045	1-218-990-11	SHORT	0		
R046	1-218-990-11	SHORT	0		
R047	1-218-990-11	SHORT	0		
R048	1-218-990-11	SHORT	0		
R049	1-218-990-11	SHORT	0		
R050	1-218-990-11	SHORT	0		
R051	1-218-990-11	SHORT	0		
R052	1-218-990-11	SHORT	0		
R053	1-218-990-11	SHORT	0		
R055	1-218-990-11	SHORT	0		
R056	1-218-990-11	SHORT	0		
R057	1-218-990-11	SHORT	0		
R058	1-218-990-11	SHORT	0		
R063	1-218-990-11	SHORT	0		
R065	1-218-990-11	SHORT	0		
R068	1-218-990-11	SHORT	0		
R069	1-218-990-11	SHORT	0		
R070	1-218-990-11	SHORT	0		
R075	1-218-990-11	SHORT	0		
R076	1-218-969-11	RES-CHIP	22K	5%	1/16W
R077	1-218-947-11	RES-CHIP	330	5%	1/16W
R078	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R079	1-208-643-11	RES-CHIP	22	5%	1/16W
R101	1-216-298-00	METAL CHIP	2.2	5%	1/10W
R105	1-218-965-11	RES-CHIP	10K	5%	1/16W
R106	1-218-965-11	RES-CHIP	10K	5%	1/16W
R107	1-218-990-11	SHORT	0		
R109	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R111	1-218-949-11	RES-CHIP	470	5%	1/16W
R112	1-218-953-11	RES-CHIP	1K	5%	1/16W
R113	1-218-965-11	RES-CHIP	10K	5%	1/16W
R114	1-208-935-11	METAL CHIP	100K	0.5%	1/16W
R116	1-218-965-11	RES-CHIP	10K	5%	1/16W
R117	1-218-953-11	RES-CHIP	1K	5%	1/16W
R118	1-218-953-11	RES-CHIP	1K	5%	1/16W
R119	1-218-965-11	RES-CHIP	10K	5%	1/16W

DVD

Ref. No.	Part No.	Description			Remarks
R121	1-218-965-11	RES-CHIP	10K	5%	1/16W
R122	1-218-965-11	RES-CHIP	10K	5%	1/16W (US, CND, MX)
R123	1-218-965-11	RES-CHIP	10K	5%	1/16W
R124	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R125	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R126	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R128	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R129	1-218-965-11	RES-CHIP	10K	5%	1/16W
R130	1-218-965-11	RES-CHIP	10K	5%	1/16W
R131	1-218-965-11	RES-CHIP	10K	5%	1/16W
R132	1-218-965-11	RES-CHIP	10K	5%	1/16W
R133	1-218-965-11	RES-CHIP	10K	5%	1/16W
R134	1-218-965-11	RES-CHIP	10K	5%	1/16W
R136	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R137	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R138	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R140	1-208-635-11	METAL CHIP	10	0.5%	1/16W (EXCEPT MX)
R143	1-218-965-11	RES-CHIP	10K	5%	1/16W
R145	1-218-965-11	RES-CHIP	10K	5%	1/16W
R146	1-218-965-11	RES-CHIP	10K	5%	1/16W
R149	1-218-961-11	RES-CHIP	4.7K	5%	1/16W (US, CND, MX)
R149	1-218-959-11	RES-CHIP	3.3K	5%	1/16W (EXCEPT US, CND, MX)
R150	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT US, CND, MX)
R151	1-218-961-11	RES-CHIP	4.7K	5%	1/16W (US, CND, MX)
R151	1-218-959-11	RES-CHIP	3.3K	5%	1/16W (EXCEPT US, CND, MX)
R152	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT US, CND, MX)
R152	1-218-975-11	RES-CHIP	68K	5%	1/16W (US, CND, MX)
R153	1-218-961-11	RES-CHIP	4.7K	5%	1/16W (US, CND, MX)
R153	1-218-959-11	RES-CHIP	3.3K	5%	1/16W (EXCEPT US, CND, MX)
R154	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT US, CND, MX)
R155	1-218-961-11	RES-CHIP	4.7K	5%	1/16W (US, CND, MX)
R155	1-218-959-11	RES-CHIP	3.3K	5%	1/16W (EXCEPT US, CND, MX)
R156	1-218-965-11	RES-CHIP	10K	5%	1/16W
R157	1-218-990-11	SHORT	0		
R160	1-218-965-11	RES-CHIP	10K	5%	1/16W
R161	1-218-990-11	SHORT	0		
R162	1-218-965-11	RES-CHIP	10K	5%	1/16W
R163	1-218-965-11	RES-CHIP	10K	5%	1/16W
R164	1-218-941-11	RES-CHIP	100	5%	1/16W
R165	1-218-941-11	RES-CHIP	100	5%	1/16W
R166	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R167	1-218-953-11	RES-CHIP	1K	5%	1/16W (US, CND, MX)
R167	1-218-957-11	RES-CHIP	2.2K	5%	1/16W (EXCEPT US, CND, MX)
R168	1-218-990-11	SHORT	0		
R170	1-218-953-11	RES-CHIP	1K	5%	1/16W
R172	1-218-965-11	RES-CHIP	10K	5%	1/16W
R174	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R175	1-218-990-11	SHORT	0		
R176	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R177	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R178	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R179	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R182	1-208-935-11	METAL CHIP	100K	0.5%	1/16W
R183	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R184	1-218-965-11	RES-CHIP	10K	5%	1/16W
R185	1-218-965-11	RES-CHIP	10K	5%	1/16W
R186	1-218-965-11	RES-CHIP	10K	5%	1/16W
R187	1-218-957-11	RES-CHIP	2.2K	5%	1/16W (US, CND, MX)
R187	1-218-953-11	RES-CHIP	1K	5%	1/16W (EXCEPT US, CND, MX)
R188	1-218-965-11	RES-CHIP	10K	5%	1/16W
R199	1-218-958-11	RES-CHIP	2.7K	5%	1/16W
R201	1-218-941-11	RES-CHIP	100	5%	1/16W
R202	1-218-953-11	RES-CHIP	1K	5%	1/16W
R203	1-218-953-11	RES-CHIP	1K	5%	1/16W
R204	1-218-953-11	RES-CHIP	1K	5%	1/16W
R205	1-218-953-11	RES-CHIP	1K	5%	1/16W
R206	1-218-953-11	RES-CHIP	1K	5%	1/16W
R207	1-218-945-11	RES-CHIP	220	5%	1/16W
R208	1-218-953-11	RES-CHIP	1K	5%	1/16W
R209	1-218-945-11	RES-CHIP	220	5%	1/16W
R210	1-218-953-11	RES-CHIP	1K	5%	1/16W
R211	1-218-953-11	RES-CHIP	1K	5%	1/16W
R212	1-218-953-11	RES-CHIP	1K	5%	1/16W
R213	1-218-953-11	RES-CHIP	1K	5%	1/16W
R214	1-218-953-11	RES-CHIP	1K	5%	1/16W
R215	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R216	1-218-965-11	RES-CHIP	10K	5%	1/16W
R217	1-218-945-11	RES-CHIP	220	5%	1/16W
R218	1-218-945-11	RES-CHIP	220	5%	1/16W
R299	1-218-979-11	RES-CHIP	150K	5%	1/16W
R301	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R302	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R305	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R306	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R307	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R308	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R309	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R310	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R311	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R312	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R313	1-218-949-11	RES-CHIP	470	5%	1/16W
R314	1-218-949-11	RES-CHIP	470	5%	1/16W
R315	1-218-949-11	RES-CHIP	470	5%	1/16W
R316	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R317	1-218-965-11	RES-CHIP	10K	5%	1/16W
R318	1-218-990-11	SHORT	0		
R319	1-218-963-11	RES-CHIP	6.8K	5%	1/16W
R320	1-218-990-11	SHORT	0		
R321	1-218-949-11	RES-CHIP	470	5%	1/16W
R328	1-218-965-11	RES-CHIP	10K	5%	1/16W

Ref. No.	Part No.	Description			Remarks
R329	1-218-990-11	SHORT	0 (EXCEPT US, CND, MX)		
R330	1-218-990-11	SHORT	0		
R331	1-208-643-11	RES-CHIP	22	5%	1/16W
R332	1-218-990-11	SHORT	0		
R334	1-208-707-11	METAL CHIP	10K	0.5%	1/16W
R335	1-208-691-11	METAL CHIP	2.2K	0.5%	1/16W
R336	1-218-965-11	RES-CHIP	10K	5%	1/16W
R337	1-218-941-11	RES-CHIP	100	5%	1/16W
R338	1-208-715-11	METAL CHIP	22K	0.5%	1/16W
R341	1-208-707-11	METAL CHIP	10K	0.5%	1/16W
R342	1-208-719-11	METAL CHIP	33K	0.5%	1/16W
R343	1-218-945-11	METAL CHIP	220	0.5%	1/16W
R344	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R345	1-218-965-11	RES-CHIP	10K	5%	1/16W
R349	1-218-970-11	RES-CHIP	27K	5%	1/16W
R350	1-218-954-11	RES-CHIP	1.2K	5%	1/16W
R351	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R352	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R356	1-208-689-11	METAL CHIP	1.8K	0.5%	1/16W
R368	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R384	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R385	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R406	1-218-978-11	RES-CHIP	120K	5%	1/16W
R407	1-218-978-11	RES-CHIP	120K	5%	1/16W
R408	1-218-979-11	RES-CHIP	150K	5%	1/16W
R409	1-218-979-11	RES-CHIP	150K	5%	1/16W
R410	1-218-974-11	RES-CHIP	56K	5%	1/16W
R411	1-218-974-11	RES-CHIP	56K	5%	1/16W
R412	1-218-982-11	RES-CHIP	270K	5%	1/16W
R413	1-218-965-11	RES-CHIP	10K	5%	1/16W
R414	1-218-985-11	RES-CHIP	470K	5%	1/16W
R415	1-218-978-11	RES-CHIP	120K	5%	1/16W
R416	1-218-987-11	RES-CHIP	680K	5%	1/16W
R417	1-218-965-11	RES-CHIP	10K	5%	1/16W
R418	1-218-971-11	RES-CHIP	33K	5%	1/16W
R419	1-218-971-11	RES-CHIP	33K	5%	1/16W
R420	1-218-985-11	RES-CHIP	470K	5%	1/16W
R421	1-218-971-11	RES-CHIP	33K	5%	1/16W
R422	1-218-971-11	RES-CHIP	33K	5%	1/16W
R423	1-208-719-11	METAL CHIP	33K	0.5%	1/16W (US, CND, MX)
R424	1-208-719-11	METAL CHIP	33K	0.5%	1/16W (US, CND, MX)
R425	1-208-943-11	METAL CHIP	220K	0.5%	1/16W (US, CND, MX)
R426	1-218-985-11	RES-CHIP	470K	5%	1/16W
R427	1-208-935-11	METAL CHIP	100K	0.5%	1/16W
R428	1-218-971-11	RES-CHIP	33K	5%	1/16W
R429	1-218-974-11	METAL CHIP	56K	0.5%	1/16W
R430	1-208-935-11	METAL CHIP	100K	0.5%	1/16W
R431	1-218-974-11	METAL CHIP	56K	0.5%	1/16W
R432	1-218-965-11	RES-CHIP	10K	5%	1/16W
R433	1-218-965-11	RES-CHIP	10K	5%	1/16W
R434	1-218-947-11	RES-CHIP	330	5%	1/16W
R435	1-218-965-11	RES-CHIP	10K	5%	1/16W
R439	1-218-990-11	SHORT	0		
R501	1-218-990-11	SHORT	0		
R507	1-218-941-11	RES-CHIP	100	5%	1/16W
R508	1-218-990-11	SHORT	0		
R509	1-218-990-11	SHORT	0		
R510	1-218-965-11	RES-CHIP	10K	5%	1/16W
R511	1-218-945-11	RES-CHIP	220	5%	1/16W
R512	1-218-945-11	RES-CHIP	220	5%	1/16W
R513	1-218-945-11	RES-CHIP	220	5%	1/16W
R514	1-218-945-11	RES-CHIP	220	5%	1/16W
R515	1-218-945-11	RES-CHIP	220	5%	1/16W
R516	1-218-945-11	RES-CHIP	220	5%	1/16W
R517	1-218-965-11	RES-CHIP	10K	5%	1/16W
R518	1-218-954-11	RES-CHIP	1.2K	5%	1/16W
R522	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R524	1-218-965-11	RES-CHIP	10K	5%	1/16W
R525	1-218-965-11	RES-CHIP	10K	5%	1/16W
R532	1-218-965-11	RES-CHIP	10K	5%	1/16W
R533	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R554	1-208-635-11	METAL CHIP	10	0.5%	1/16W
R593	1-218-953-11	RES-CHIP	1K	5%	1/16W
R596	1-218-953-11	RES-CHIP	1K	5%	1/16W
R600	1-218-941-11	RES-CHIP	100	5%	1/16W
R602	1-218-989-11	RES-CHIP	1M	5%	1/16W
R603	1-218-941-11	RES-CHIP	100	5%	1/16W
R604	1-218-941-11	RES-CHIP	100	5%	1/16W
R605	1-218-941-11	RES-CHIP	100	5%	1/16W
R606	1-218-941-11	RES-CHIP	100	5%	1/16W
R607	1-218-941-11	RES-CHIP	100	5%	1/16W
R608	1-218-941-11	RES-CHIP	100	5%	1/16W
R609	1-218-949-11	RES-CHIP	470	5%	1/16W
R610	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R611	1-218-941-11	RES-CHIP	100	5%	1/16W
R612	1-218-973-11	RES-CHIP	47K	5%	1/16W
R613	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R614	1-218-971-11	RES-CHIP	33K	5%	1/16W
R615	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R616	1-218-962-11	RES-CHIP	5.6K	5%	1/16W
R617	1-218-990-11	SHORT	0		
R618	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R619	1-218-973-11	RES-CHIP	47K	5%	1/16W
R620	1-218-941-11	RES-CHIP	100	5%	1/16W
R621	1-218-941-11	RES-CHIP	100	5%	1/16W
R622	1-218-941-11	RES-CHIP	100	5%	1/16W
R623	1-218-941-11	RES-CHIP	100	5%	1/16W
R624	1-218-941-11	RES-CHIP	100	5%	1/16W
R625	1-218-941-11	RES-CHIP	100	5%	1/16W
R626	1-218-953-11	RES-CHIP	1K	5%	1/16W
R627	1-218-957-11	RES-CHIP	2.2K	5%	1/16W
R628	1-218-941-11	RES-CHIP	100	5%	1/16W
R629	1-218-941-11	RES-CHIP	100	5%	1/16W
R630	1-218-949-11	RES-CHIP	470	5%	1/16W
R631	1-218-941-11	RES-CHIP	100	5%	1/16W
R634	1-218-953-11	RES-CHIP	1K	5%	1/16W
R635	1-218-958-11	RES-CHIP	2.7K	5%	1/16W (US, CND)
R636	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R637	1-218-941-11	RES-CHIP	100	5%	1/16W
R639	1-218-941-11	RES-CHIP	100	5%	1/16W

DVD

Ref. No.	Part No.	Description			Remarks
R640	1-218-941-11	RES-CHIP	100	5%	1/16W
R642	1-218-941-11	RES-CHIP	100	5%	1/16W
R644	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R645	1-218-965-11	RES-CHIP	10K	5%	1/16W
R646	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R647	1-218-941-11	RES-CHIP	100	5%	1/16W
R648	1-218-941-11	RES-CHIP	100	5%	1/16W
R650	1-218-941-11	RES-CHIP	100	5%	1/16W
R651	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R652	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R653	1-218-941-11	RES-CHIP	100	5%	1/16W
R654	1-218-941-11	RES-CHIP	100	5%	1/16W
R655	1-218-941-11	RES-CHIP	100	5%	1/16W
R656	1-218-990-11	SHORT	0		
R657	1-218-941-11	RES-CHIP	100	5%	1/16W
R658	1-218-941-11	RES-CHIP	100	5%	1/16W
R659	1-218-935-11	RES-CHIP	33	5%	1/16W
R660	1-218-959-11	RES-CHIP	3.3K	5%	1/16W
R661	1-218-941-11	RES-CHIP	100	5%	1/16W
R662	1-218-941-11	RES-CHIP	100	5%	1/16W
R663	1-218-941-11	RES-CHIP	100	5%	1/16W
R664	1-218-941-11	RES-CHIP	100	5%	1/16W
R665	1-218-958-11	RES-CHIP	2.7K	5%	1/16W (US, CND)
R666	1-218-941-11	RES-CHIP	100	5%	1/16W
R667	1-218-941-11	RES-CHIP	100	5%	1/16W
R668	1-218-953-11	RES-CHIP	1K	5%	1/16W
R669	1-218-953-11	RES-CHIP	1K	5%	1/16W
R671	1-218-941-11	RES-CHIP	100	5%	1/16W
R672	1-218-941-11	RES-CHIP	100	5%	1/16W
R673	1-218-945-11	RES-CHIP	220	5%	1/16W
R674	1-218-945-11	RES-CHIP	220	5%	1/16W
R675	1-218-945-11	RES-CHIP	220	5%	1/16W
R676	1-218-945-11	RES-CHIP	220	5%	1/16W
R677	1-218-945-11	RES-CHIP	220	5%	1/16W
R679	1-218-941-11	RES-CHIP	100	5%	1/16W
R680	1-218-941-11	RES-CHIP	100	5%	1/16W
R682	1-218-965-11	RES-CHIP	10K	5%	1/16W
R684	1-218-965-11	RES-CHIP	10K	5%	1/16W
R685	1-218-941-11	RES-CHIP	100	5%	1/16W
R686	1-218-965-11	RES-CHIP	10K	5%	1/16W
R687	1-218-953-11	RES-CHIP	1K	5%	1/16W
R688	1-218-965-11	RES-CHIP	10K	5%	1/16W
R689	1-218-965-11	RES-CHIP	10K	5%	1/16W
R692	1-218-941-11	RES-CHIP	100	5%	1/16W
R695	1-218-941-11	RES-CHIP	100	5%	1/16W
R696	1-218-945-11	RES-CHIP	220	5%	1/16W
R699	1-218-941-11	RES-CHIP	100	5%	1/16W
R700	1-218-965-11	RES-CHIP	10K	5%	1/16W
R701	1-218-953-11	RES-CHIP	1K	5%	1/16W
R702	1-218-945-11	RES-CHIP	220	5%	1/16W
R801	1-218-990-11	SHORT	0		
R802	1-218-990-11	SHORT	0		
R803	1-218-990-11	SHORT	0		
R804	1-218-990-11	SHORT	0		
R805	1-218-990-11	SHORT	0		

Ref. No.	Part No.	Description			Remarks
R806	1-218-990-11	SHORT	0		
R807	1-218-990-11	SHORT	0		
R808	1-218-990-11	SHORT	0		
R810	1-218-965-11	RES-CHIP	10K	5%	1/16W
R811	1-218-965-11	RES-CHIP	10K	5%	1/16W
R812	1-218-965-11	RES-CHIP	10K	5%	1/16W
R813	1-218-965-11	RES-CHIP	10K	5%	1/16W
R814	1-218-965-11	RES-CHIP	10K	5%	1/16W
R815	1-218-965-11	RES-CHIP	10K	5%	1/16W
R816	1-218-965-11	RES-CHIP	10K	5%	1/16W
R817	1-218-965-11	RES-CHIP	10K	5%	1/16W
R821	1-218-990-11	SHORT	0		
R823	1-218-965-11	RES-CHIP	10K	5%	1/16W
R824	1-218-990-11	SHORT	0		
R825	1-218-990-11	SHORT	0		
R826	1-208-643-11	RES-CHIP	22	5%	1/16W
R827	1-218-990-11	SHORT	0		
R828	1-218-990-11	SHORT	0		
R829	1-218-990-11	SHORT	0		
R830	1-218-965-11	RES-CHIP	10K	5%	1/16W
R831	1-218-990-11	SHORT	0		
R832	1-218-990-11	SHORT	0		
R833	1-218-990-11	SHORT	0		
R834	1-218-990-11	SHORT	0		
R835	1-218-990-11	SHORT	0		
R836	1-218-990-11	SHORT	0		
R837	1-218-990-11	SHORT	0		
R838	1-218-990-11	SHORT	0		
R839	1-218-990-11	SHORT	0		
R840	1-218-990-11	SHORT	0		
R841	1-218-990-11	SHORT	0		
R842	1-218-990-11	SHORT	0		
R843	1-218-990-11	SHORT	0		
R844	1-218-965-11	RES-CHIP	10K	5%	1/16W
R845	1-218-965-11	RES-CHIP	10K	5%	1/16W
R846	1-218-990-11	SHORT	0		
R847	1-218-990-11	SHORT	0		
R900	1-218-941-11	RES-CHIP	100	5%	1/16W
R901	1-218-941-11	RES-CHIP	100	5%	1/16W
R902	1-218-941-11	RES-CHIP	100	5%	1/16W
R903	1-218-941-11	RES-CHIP	100	5%	1/16W
R904	1-218-941-11	RES-CHIP	100	5%	1/16W
R905	1-218-941-11	RES-CHIP	100	5%	1/16W
R908	1-218-965-11	RES-CHIP	10K	5%	1/16W
R909	1-218-965-11	RES-CHIP	10K	5%	1/16W
R910	1-218-941-11	RES-CHIP	100	5%	1/16W
R911	1-218-941-11	RES-CHIP	100	5%	1/16W
R912	1-218-941-11	RES-CHIP	100	5%	1/16W
R913	1-218-941-11	RES-CHIP	100	5%	1/16W
R914	1-218-941-11	RES-CHIP	100	5%	1/16W
R915	1-218-941-11	RES-CHIP	100	5%	1/16W
R916	1-218-941-11	RES-CHIP	100	5%	1/16W
R919	1-218-965-11	RES-CHIP	10K	5%	1/16W
R920	1-218-941-11	RES-CHIP	100	5%	1/16W
R921	1-218-941-11	RES-CHIP	100	5%	1/16W

Ref. No.	Part No.	Description			Remarks
R922	1-218-961-11	RES-CHIP	4.7K	5%	1/16W
R924	1-218-965-11	RES-CHIP	10K	5%	1/16W
R928	1-218-941-11	RES-CHIP	100	5%	1/16W
R929	1-218-989-11	RES-CHIP	1M	5%	1/16W
R930	1-218-965-11	RES-CHIP	10K	5%	1/16W
R931	1-218-945-11	RES-CHIP	220	5%	1/16W
R932	1-218-965-11	RES-CHIP	10K	5%	1/16W
R934	1-218-965-11	RES-CHIP	10K	5%	1/16W
R936	1-218-965-11	RES-CHIP	10K	5%	1/16W
R937	1-218-965-11	RES-CHIP	10K	5%	1/16W (MX)
R938	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT MX)
R939	1-218-965-11	RES-CHIP	10K	5%	1/16W (MX)
R940	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT MX)
R941	1-218-965-11	RES-CHIP	10K	5%	1/16W
R942	1-218-965-11	RES-CHIP	10K	5%	1/16W
R943	1-218-965-11	RES-CHIP	10K	5%	1/16W
R944	1-218-965-11	RES-CHIP	10K	5%	1/16W
R945	1-218-965-11	RES-CHIP	10K	5%	1/16W
R946	1-218-965-11	RES-CHIP	10K	5%	1/16W
R947	1-218-965-11	RES-CHIP	10K	5%	1/16W
R948	1-218-965-11	RES-CHIP	10K	5%	1/16W
R949	1-218-965-11	RES-CHIP	10K	5%	1/16W
R950	1-218-973-11	RES-CHIP	47K	5%	1/16W
R951	1-218-965-11	RES-CHIP	10K	5%	1/16W (US, CND, MX)
R952	1-218-965-11	RES-CHIP	10K	5%	1/16W
R953	1-218-965-11	RES-CHIP	10K	5%	1/16W
R954	1-218-965-11	RES-CHIP	10K	5%	1/16W
R955	1-218-965-11	RES-CHIP	10K	5%	1/16W
R956	1-218-965-11	RES-CHIP	10K	5%	1/16W
R957	1-218-965-11	RES-CHIP	10K	5%	1/16W
R959	1-218-953-11	RES-CHIP	1K	5%	1/16W
R960	1-218-965-11	RES-CHIP	10K	5%	1/16W
R961	1-218-965-11	RES-CHIP	10K	5%	1/16W
R962	1-218-965-11	RES-CHIP	10K	5%	1/16W
R963	1-218-965-11	RES-CHIP	10K	5%	1/16W
R964	1-218-973-11	RES-CHIP	47K	5%	1/16W
R965	1-218-965-11	RES-CHIP	10K	5%	1/16W (EXCEPT US, CND, MX)
R967	1-218-941-11	RES-CHIP	100	5%	1/16W
R968	1-218-941-11	RES-CHIP	100	5%	1/16W
R969	1-218-941-11	RES-CHIP	100	5%	1/16W
R970	1-218-941-11	RES-CHIP	100	5%	1/16W
R971	1-218-941-11	RES-CHIP	100	5%	1/16W
R972	1-218-965-11	RES-CHIP	10K	5%	1/16W
R974	1-218-990-11	SHORT	0		
R977	1-218-965-11	RES-CHIP	10K	5%	1/16W (C900)
R978	1-218-965-11	RES-CHIP	10K	5%	1/16W (US, CND, MX)
R979	1-218-965-11	RES-CHIP	10K	5%	1/16W (US, CND, MX)
R982	1-218-965-11	RES-CHIP	10K	5%	1/16W (US, CND, MX)
R983	1-218-965-11	RES-CHIP	10K	5%	1/16W
R984	1-218-965-11	RES-CHIP	10K	5%	1/16W
R985	1-218-985-11	RES-CHIP	470K	5%	1/16W
R986	1-218-973-11	RES-CHIP	47K	5%	1/16W
R987	1-218-973-11	RES-CHIP	47K	5%	1/16W
R988	1-218-990-11	SHORT	0		
R989	1-218-990-11	SHORT	0		
R990	1-218-965-11	RES-CHIP	10K	5%	1/16W
R991	1-218-965-11	RES-CHIP	10K	5%	1/16W
R992	1-218-965-11	RES-CHIP	10K	5%	1/16W
		< COMPOSITION CIRCUIT BLOCK >			
* RB201	1-233-270-11	NETWORK, RES (8 GANG) 10K			
		< VARIABLE RESISTOR >			
RV501	1-223-583-11	RES, ADJ, CARBON 1K (VIDEO LEVEL ADJ)			
		< VIBRATOR >			
X101	1-795-174-11	VIBRATOR, CERAMIC (16.5MHz)			
X102	1-767-519-11	VIBRATOR, CRYSTAL (29MHz) (EXCEPT MY, SP, HK)			
X102	1-781-867-21	VIBRATOR, CRYSTAL (27MHz) (MY, SP, HK)			
X600	1-795-126-11	VIBRATOR, CRYSTAL (12.288MHz) (EXCEPT MX)			
X600	1-781-465-21	VIBRATOR, CRYSTAL (12.288MHz) (MX)			
X601	1-795-363-21	VIBRATOR, CERAMIC (13.5MHz)			
X901	1-767-922-11	VIBRATOR, CERAMIC (16MHz)			
**********					
	A-4726-392-A	FP-1089 BOARD, COMPLETE (C700:US,C900)			
	A-4726-828-A	FP-1089 BOARD, COMPLETE (C700:CND, AEP, UK, E, MY, SP, HK, MX, AUS)			
		**********			
		< CAPACITOR >			
C802	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C803	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C804	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C805	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C806	1-126-153-11	ELECT	22uF	20%	6.3V (US, CND)
C806	1-126-514-11	ELECT	22uF	20.00%	6.3V (EXCEPT US, CND)
C812	1-126-153-11	ELECT	22uF	20%	6.3V (US, CND)
C812	1-126-514-11	ELECT	22uF	20.00%	6.3V (EXCEPT US, CND)
C813	1-164-156-11	CERAMIC CHIP	0.1uF		25V
C814	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C815	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C816	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C817	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C818	1-162-923-11	CERAMIC CHIP	47PF	5%	50V
C819	1-164-156-11	CERAMIC CHIP	0.1uF		25V
		< CONNECTOR >			
CN801	1-785-731-11	CONNECTOR, FFC/FPC 17P			
CN802	1-506-481-11	PIN, CONNECTOR 2P			
* CN804	1-506-486-11	PIN, CONNECTOR 7P			
		< FERRITE BEAD >			
FB800	1-414-813-11	FERRITE	0uH		
FB801	1-414-813-11	FERRITE	0uH		
FB802	1-414-813-11	FERRITE	0uH		

FP-1089 FU-1098 HP-1089 INIT/COUNT SW IN SW

Ref. No.	Part No.	Description			Remarks
		< FILTER >			
FL801	1-518-767-21	INDICATOR TUBE, FLUORESCENT			
		< IC >			
IC801	8-759-366-45	IC NJU3713G(TE2)			
IC802	6-700-112-01	IC MSM9202-05GS-KDR1			
		< COIL >			
L900	1-410-387-11	INDUCTOR CHIP	33uH		
L901	1-410-387-11	INDUCTOR CHIP	33uH		
L902	1-412-002-31	INDUCTOR	4.7uH		
L903	1-412-002-31	INDUCTOR	4.7uH		
		< TRANSISTOR >			
Q801	8-729-602-36	TRANSISTOR	2SA1602TP-1EF		
		< RESISTOR >			
R805	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R810	1-216-809-11	METAL CHIP	100	5%	1/16W
R811	1-216-809-11	METAL CHIP	100	5%	1/16W
R812	1-216-809-11	METAL CHIP	100	5%	1/16W
R813	1-216-809-11	METAL CHIP	100	5%	1/16W
R814	1-216-841-11	METAL CHIP	47K	5%	1/16W
R839	1-216-864-11	METAL CHIP	0	5%	1/16W
R840	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R841	1-216-809-11	METAL CHIP	100	5%	1/16W
R842	1-216-809-11	METAL CHIP	100	5%	1/16W
R843	1-216-809-11	METAL CHIP	100	5%	1/16W
**********					
	1-681-999-11	FU-1098 BOARD			
		**********			
		< CAPACITOR >			
C800	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C801	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C808	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C809	1-126-153-11	ELECT	22uF	20%	6.3V (US, CND)
C809	1-126-514-11	ELECT	22uF	20.00%	6.3V (EXCEPT US, CND)
		< IC >			
IC800	8-759-827-70	IC NJL64H400A-1 (R) (US, CND)			
IC800	8-759-459-86	IC NJL64H400A (R) (EXCEPT US, CND)			
		< RESISTOR >			
R809	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
R815	1-216-805-11	METAL CHIP	47	5%	1/16W
R837	1-216-821-11	METAL CHIP	1K	5%	1/16W
R838	1-216-805-11	METAL CHIP	47	5%	1/16W
R844	1-216-823-11	METAL CHIP	1.5K	5%	1/16W
R849	1-216-824-11	METAL CHIP	1.8K	5%	1/16W
R860	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R873	1-216-809-11	METAL CHIP	100	5%	1/16W

Ref. No.	Part No.	Description			Remarks
		< SWITCH >			
S800	1-418-632-11	ENCODER, ROTARY (VOLUME)			
S821	1-762-875-21	SWITCH, KEYBOARD (SOUND FIELD+)			
S822	1-762-875-21	SWITCH, KEYBOARD (SOUND FIELD-)			
S823	1-762-875-21	SWITCH, KEYBOARD (DISPLAY)			
S824	1-762-875-21	SWITCH, KEYBOARD (BAND)			
S825	1-762-875-21	SWITCH, KEYBOARD (FUNCTION)			
**********					
	1-682-003-11	HP-1089 BOARD			
		**********			
		< CAPACITOR >			
C900	1-124-234-00	ELECT	22uF	20%	16V
C901	1-124-234-00	ELECT	22uF	20%	16V
C902	1-163-011-11	CERAMIC CHIP	0.0015uF	10%	50V
C903	1-127-715-11	CERAMIC CHIP	0.22uF	10%	16V
C904	1-127-715-11	CERAMIC CHIP	0.22uF	10%	16V
		< FERRITE BEAD >			
FB803	1-469-144-21	FERRITE	0uH		
FB804	1-469-144-21	FERRITE	0uH		
FB805	1-469-144-21	FERRITE	0uH		
		< JACK >			
J900	1-566-891-21	JACK (PHONES)			
		< TRANSISTOR >			
Q900	8-729-046-97	TRANSISTOR	2SD1938(F)-T(TX).SO		
Q901	8-729-046-97	TRANSISTOR	2SD1938(F)-T(TX).SO		
		< RESISTOR >			
R900	1-216-833-11	METAL CHIP	10K	5%	1/16W
R901	1-216-821-11	METAL CHIP	1K	5%	1/16W
R902	1-216-833-11	METAL CHIP	10K	5%	1/16W
R903	1-216-821-11	METAL CHIP	1K	5%	1/16W
R905	1-216-821-11	METAL CHIP	1K	5%	1/16W
R906	1-216-821-11	METAL CHIP	1K	5%	1/16W
**********					
	1-675-724-21	INIT/COUNT SW BOARD			
		**********			
		< SWITCH >			
S705	1-771-264-11	SWITCH, PUSH(DETECTION)(1 KEY) (INIT)			
S706	1-771-264-11	SWITCH, PUSH(DETECTION)(1 KEY) (COUNT)			
**********					
	1-675-723-21	IN SW BOARD			
		**********			
		< CONNECTOR >			
* CN710	1-568-941-11	PIN, CONNECTOR 3P			
		< SWITCH >			
S703	1-771-218-11	SWITCH, MICRO (MID IN)			
S704	1-771-218-11	SWITCH, MICRO (IN)			
**********					

Ref. No.	Part No.	Description			Remarks
	A-4726-380-A	I/O BOARD, COMPLETE (C700:US)			
	A-4726-818-A	I/O BOARD, COMPLETE (C700:CND, E, MY, SP, HK, MX, AUS)			
	A-4726-917-A	I/O BOARD, COMPLETE (C900)			
	A-4727-015-A	I/O BOARD, COMPLETE (AEP, UK)			
		**********			
		< CAPACITOR >			
C600	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C600	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C601	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C601	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C602	1-126-933-11	ELECT	100uF	20.00% 16V	
C603	1-126-960-11	ELECT	1uF	20.00% 50V	
C604	1-126-960-11	ELECT	1uF	20.00% 50V	
C605	1-163-038-91	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP,UK)
C605	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C606	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP,UK)
C606	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C608	1-163-023-00	CERAMIC CHIP	0.015uF	5% 50V	(EXCEPT US)
C608	1-164-227-11	CERAMIC CHIP	0.022uF	10% 25V (US)	
C609	1-163-023-00	CERAMIC CHIP	0.015uF	5% 50V	(EXCEPT US)
C609	1-164-227-11	CERAMIC CHIP	0.022uF	10% 25V (US)	
C610	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C610	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C611	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C611	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C613	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C613	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C614	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C614	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C615	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C615	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C616	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C616	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C617	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C617	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C618	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C618	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C619	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C619	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C620	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C620	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C621	1-163-001-11	CERAMIC CHIP	220PF	10% 50V	(EXCEPT US, CND)
C621	1-162-960-11	CERAMIC CHIP	220PF	10% 50V (US)	
C622	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US)
C622	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C623	1-162-960-11	CERAMIC CHIP	220PF	10% 50V (US)	
C623	1-163-001-11	CERAMIC CHIP	220PF	10% 50V	(EXCEPT US)
C624	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C624	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C625	1-162-960-11	CERAMIC CHIP	220PF	10% 50V (US)	
C625	1-163-001-11	CERAMIC CHIP	220PF	10% 50V	(EXCEPT US)
C626	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C626	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C627	1-162-960-11	CERAMIC CHIP	220PF	10% 50V (US)	
C627	1-163-001-11	CERAMIC CHIP	220PF	10% 50V	(EXCEPT US)
C628	1-126-933-11	ELECT	100uF	20.00% 16V	
C630	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C630	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C631	1-126-956-11	ELECT	0.1uF	20.00% 50V	(EXCEPT US, CND)
C631	1-128-551-11	ELECT	22uF	20.00% 25V	(US, CND)
C632	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C632	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C633	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C633	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C635	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C636	1-126-947-11	ELECT	47uF	20.00% 16V	(AEP, UK)
C637	1-162-959-11	CERAMIC CHIP	330PF	5% 50V	(AEP, UK)
C638	1-162-970-11	CERAMIC CHIP	0.01uF	10% 25V	(AEP, UK)
C639	1-164-185-11	CERAMIC CHIP	13PF	5.00% 50V	(AEP, UK)
C640	1-164-185-11	CERAMIC CHIP	13PF	5.00% 50V	(AEP, UK)
C641	1-164-739-11	CERAMIC CHIP	560PF	5.00% 50V	(AEP, UK)

I/O

Ref. No.	Part No.	Description			Remarks
C642	1-126-963-11	ELECT	4.7uF	20.00% 50V	(AEP, UK)
C661	1-126-964-11	ELECT	10uF	20.00% 50V	
C662	1-126-964-11	ELECT	10uF	20.00% 50V	
C671	1-164-156-11	CERAMIC CHIP	0.1uF	25V	
C672	1-164-156-11	CERAMIC CHIP	0.1uF	25V	
C700	1-162-918-11	CERAMIC CHIP	18PF	5.00% 50V (US)	
C700	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C701	1-162-921-11	CERAMIC CHIP	33PF	5% 50V (US)	
C701	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C705	1-162-918-11	CERAMIC CHIP	18PF	5.00% 50V (US)	
C705	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C706	1-162-921-11	CERAMIC CHIP	33PF	5% 50V (US)	
C706	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C707	1-126-964-11	ELECT	10uF	20.00% 50V	
C708	1-126-933-11	ELECT	100uF	20.00% 16V	
C712	1-162-918-11	CERAMIC CHIP	18PF	5.00% 50V (US)	
C712	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C713	1-162-921-11	CERAMIC CHIP	33PF	5% 50V (US)	
C713	1-163-227-11	CERAMIC CHIP	10PF	0.50PF 50V	(EXCEPT US)
C717	1-126-964-11	ELECT	10uF	20.00% 50V	
C718	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C718	1-163-038-91	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C719	1-126-964-11	ELECT	10uF	20.00% 50V	
C720	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C720	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C721	1-124-261-00	ELECT	10uF	20% 50V	
C722	1-126-964-11	ELECT	10uF	20.00% 50V	
C723	1-124-261-00	ELECT	10uF	20% 50V (US)	
C723	1-126-964-11	ELECT	10uF	20.00% 50V	(EXCEPT US)
C724	1-125-972-11	ELECT	100uF	20.00% 16V	
C725	1-124-234-00	ELECT	22uF	20% 16V	
C726	1-125-972-11	ELECT	100uF	20.00% 16V	
C727	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C727	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C728	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C728	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C729	1-124-234-00	ELECT	22uF	20% 16V	
C730	1-125-972-11	ELECT	100uF	20.00% 16V	
C731	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C731	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C732	1-125-972-11	ELECT	100uF	20.00% 16V	
C733	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C733	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C734	1-124-234-00	ELECT	22uF	20% 16V	
C735	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C735	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C736	1-124-261-00	ELECT	10uF	20% 50V	
C737	1-124-261-00	ELECT	10uF	20% 50V	
C738	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C738	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C739	1-216-864-11	METAL CHIP	0	5% 1/16W	(US)
C739	1-216-295-00	SHORT	0 (EXCEPT US)		
C740	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C740	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C741	1-164-156-11	CERAMIC CHIP	0.1uF	25V	(AEP, UK)
C741	1-163-038-00	CERAMIC CHIP	0.1uF	25V	(EXCEPT AEP, UK)
C748	1-162-918-11	CERAMIC CHIP	18PF	5.00% 50V	
C749	1-162-921-11	CERAMIC CHIP	33PF	5% 50V	
C753	1-162-918-11	CERAMIC CHIP	18PF	5.00% 50V	
C754	1-162-921-11	CERAMIC CHIP	33PF	5% 50V	
C802	1-162-965-11	CERAMIC CHIP	0.0015uF	10% 50V	(US, CND)
C803	1-162-965-11	CERAMIC CHIP	0.0015uF	10% 50V	(US, CND)
		< CONNECTOR >			
CN600	1-794-431-11	CONNECTOR, FFC/FPC 13P (US, CND)			
* CN600	1-569-930-11	SOCKET, CONNECTOR 13P (EXCEPT US, CND)			
CN601	1-779-297-11	CONNECTOR,FFC(LIF(NON-ZIF))29P (US, CND)			
CN601	1-779-566-11	CONNECTOR,FFC(LIF(NON-ZIF))29P			(EXCEPT US, CND)
CN700	1-779-550-21	CONNECTOR,FFC(LIF(NON-ZIF))13P (C700)			
CN700	1-779-281-11	CONNECTOR,FFC(LIF(NON-ZIF))13P (C900)			
* CN701	1-506-486-11	PIN, CONNECTOR 7P			
		< DIODE >			
D601	8-719-056-85	DIODE UDZSTE-178.2B			
D602	8-719-056-78	DIODE UDZ-TE-17-4.3B (AEP, UK)			
		< IC >			
IC600	8-759-385-76	IC MC14052 BDR2			
IC601	8-759-646-52	IC KIA7805API (US)			
IC601	8-759-701-56	IC NJM78M05FA (EXCEPT US)			
IC602	8-749-923-05	TORX178B (VIDEO2 OPTICAL DIGITAL IN)			
IC603	8-749-923-04	IC TOTX178A (DIGITAL OUT OPTICAL)			
IC604	8-759-557-36	IC BU1924F-E2 (AEP, UK)			
IC700	8-759-696-10	IC NJM2235V(TE2)			
IC701	8-759-680-28	IC BA7666FS-E2			
IC702	8-759-284-49	IC NJM2285V-TE2			

Ref. No.	Part No.	Description			Remarks
		< JACK >			
J600	1-816-039-11	JACK, PIN 3P (VIDEO1 VIDEO OUT/AUDIO OUT L R)			
J601	1-816-039-11	JACK, PIN 3P (VIDEO1 VIDEO IN/AUDIO IN L R)			
J602	1-816-039-11	JACK, PIN 3P (VIDEO2 VIDEO IN/AUDIO IN L R)			
J700	1-815-748-11	JACK, PIN 2P (MONITOR OUT VIDEO/S VIDEO)			
		< COIL >			
L600	1-216-295-00	SHORT	0		
L601	1-469-525-91	INDUCTOR	10uH		
L700	1-412-953-11	INDUCTOR	15uH (US, CND)		
L700	1-412-939-11	INDUCTOR	1uH (EXCEPT US, CND)		
L702	1-469-525-91	INDUCTOR	10uH		
L703	1-412-953-11	INDUCTOR	15uH (US, CND)		
L703	1-412-939-11	INDUCTOR	1uH (EXCEPT US, CND)		
L705	1-412-953-11	INDUCTOR	15uH (US, CND)		
L705	1-412-939-11	INDUCTOR	1uH (EXCEPT US, CND)		
L707	1-469-525-91	INDUCTOR	10uH		
L708	1-412-953-11	INDUCTOR	15uH		
L710	1-412-953-11	INDUCTOR	15uH		
		< TRANSISTOR >			
Q600	8-729-801-93	TRANSISTOR	2SD1387-34-TP		
Q601	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
Q602	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q603	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q604	8-729-901-00	TRANSISTOR	DTC124EKA-T146		
Q605	8-729-046-97	TRANSISTOR	2SD1938(F)-T(TX).SO		
Q606	8-729-046-97	TRANSISTOR	2SD1938(F)-T(TX).SO		
Q607	8-729-120-28	TRANSISTOR	2SC2412K-T-146-QR		(AEP, UK)
Q700	8-729-026-49	TRANSISTOR	2SA1037AK-T146-R		
Q701	8-729-027-23	TRANSISTOR	DTA114EKA-T146		
Q702	8-729-024-91	TRANSISTOR	2SC2712-GL-TE85L		
Q703	8-729-024-91	TRANSISTOR	2SC2712-GL-TE85L		
Q704	1-801-806-11	TRANSISTOR	DTC144EKA-T146		
		< RESISTOR >			
R600	1-216-033-00	METAL CHIP	220	5%	1/10W (EXCEPT US)
R600	1-216-813-11	METAL CHIP	220	5%	1/16W (US)
R601	1-216-033-00	METAL CHIP	220	5%	1/10W (EXCEPT US)
R601	1-216-813-11	METAL CHIP	220	5%	1/16W (US)
R602	1-216-033-00	METAL CHIP	220	5%	1/10W (EXCEPT US)
R602	1-216-813-11	METAL CHIP	220	5%	1/16W (US)
R603	1-216-033-00	METAL CHIP	220	5%	1/10W (EXCEPT US)
R603	1-216-813-11	METAL CHIP	220	5%	1/16W (US)
R604	1-216-033-00	METAL CHIP	220	5%	1/10W (EXCEPT US)
R604	1-216-813-11	METAL CHIP	220	5%	1/16W (US)
R605	1-216-053-00	METAL CHIP	1.5K	5%	1/10W (EXCEPT US)
R605	1-216-823-11	METAL CHIP	1.5K	5%	1/16W (US)
R606	1-216-066-00	METAL CHIP	5.1K	5%	1/10W (EXCEPT US)
R606	1-218-272-11	RES-CHIP	5.1K	5%	1/16W (US)
R607	1-216-066-00	METAL CHIP	5.1K	5%	1/10W (EXCEPT US)
R607	1-218-272-11	RES-CHIP	5.1K	5%	1/16W (US)
R608	1-216-295-00	SHORT	0 (EXCEPT US)		
R608	1-216-864-11	METAL CHIP	0	5%	1/16W (US)
R609	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R609	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R610	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R610	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R611	1-216-025-11	RES-CHIP	100	5%	1/10W (EXCEPT US)
R611	1-216-809-11	METAL CHIP	100	5%	1/16W (US)
R612	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R612	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R613	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R613	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R614	1-216-025-11	RES-CHIP	100	5%	1/10W (EXCEPT US)
R614	1-216-809-11	METAL CHIP	100	5%	1/16W (US)
R615	1-216-097-11	RES-CHIP	100K	5%	1/10W (EXCEPT AEP, UK)
R615	1-216-845-11	METAL CHIP	100K	5%	1/16W (AEP,UK)
R616	1-216-097-11	RES-CHIP	100K	5%	1/10W (EXCEPT AEP, UK)
R616	1-216-845-11	METAL CHIP	100K	5%	1/16W (AEP,UK)
R617	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R617	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R618	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R618	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R619	1-216-049-11	RES-CHIP	1K	5%	1/10W (EXCEPT US)
R619	1-216-821-11	METAL CHIP	1K	5%	1/16W (US)

I/O

Ref. No.	Part No.	Description			Remarks
R620	1-216-049-11	RES-CHIP	1K	5%	1/10W (EXCEPT US)
R620	1-216-821-11	METAL CHIP	1K	5%	1/16W (US)
R621	1-216-069-00	METAL CHIP	6.8K	5%	1/10W (EXCEPT US)
R621	1-216-831-11	METAL CHIP	6.8K	5%	1/16W (US)
R622	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R622	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R623	1-216-049-11	RES-CHIP	1K	5%	1/10W (EXCEPT US)
R623	1-216-821-11	METAL CHIP	1K	5%	1/16W (US)
R624	1-216-089-00	RES-CHIP	47K	5%	1/10W (EXCEPT AEP, UK)
R624	1-216-841-11	METAL CHIP	47K	5%	1/16W (AEP,UK)
R625	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R625	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R626	1-216-069-00	METAL CHIP	6.8K	5%	1/10W (EXCEPT US)
R626	1-216-831-11	METAL CHIP	6.8K	5%	1/16W (US)
R627	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R627	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R628	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R628	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R629	1-216-089-00	RES-CHIP	47K	5%	1/10W (EXCEPT AEP, UK)
R629	1-216-841-11	METAL CHIP	47K	5%	1/16W (AEP, UK)
R630	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R630	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R631	1-216-069-00	METAL CHIP	6.8K	5%	1/10W (EXCEPT US)
R631	1-216-831-11	METAL CHIP	6.8K	5%	1/16W (US)
R632	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R632	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R633	1-216-821-11	METAL CHIP	1K	5%	1/16W (US)
R633	1-216-049-11	RES-CHIP	1K	5%	1/10W (EXCEPT US)
R634	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R634	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R635	1-216-089-00	RES-CHIP	47K	5%	1/10W (EXCEPT AEP, UK)
R635	1-216-841-11	METAL CHIP	47K	5%	1/16W (AEP,UK)
R636	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R636	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R637	1-216-069-00	METAL CHIP	6.8K	5%	1/10W (EXCEPT US)
R637	1-216-831-11	METAL CHIP	6.8K	5%	1/16W (US)
R638	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R638	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R639	1-216-089-00	RES-CHIP	47K	5%	1/10W (EXCEPT AEP, UK)
R639	1-216-841-11	METAL CHIP	47K	5%	1/16W (AEP, UK)
R640	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R640	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R641	1-216-809-11	METAL CHIP	100	5%	1/16W (US)
R641	1-216-025-11	RES-CHIP	100	5%	1/10W (EXCEPT US)
R642	1-216-829-11	METAL CHIP	4.7K	5%	1/16W (AEP, UK)
R643	1-216-853-11	METAL CHIP	470K	5%	1/16W (AEP, UK)
R644	1-216-845-11	METAL CHIP	100K	5%	1/16W (AEP, UK)
R645	1-216-821-11	METAL CHIP	1K	5%	1/16W (AEP, UK)
R646	1-216-814-11	METAL CHIP	270	5%	1/16W (AEP, UK)
R647	1-216-841-11	METAL CHIP	47K	5%	1/16W (AEP, UK)
R648	1-216-843-11	METAL CHIP	68K	5%	1/16W (AEP, UK)
R649	1-216-845-11	METAL CHIP	100K	5%	1/16W
R650	1-216-845-11	METAL CHIP	100K	5%	1/16W
R700	1-216-021-00	METAL CHIP	68	5%	1/10W (EXCEPT US)
R700	1-218-289-11	RES-CHIP	510	5%	1/16W (US)
R701	1-216-021-00	METAL CHIP	68	5%	1/10W (EXCEPT US)
R701	1-218-289-11	RES-CHIP	510	5%	1/16W (US)
R702	1-216-021-00	METAL CHIP	68	5%	1/10W (EXCEPT US)
R702	1-218-289-11	RES-CHIP	510	5%	1/16W (US)
R703	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)

Ref. No.	Part No.	Description			Remarks
R703	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R704	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R704	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)
R705	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R705	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)
R706	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R706	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)
R707	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R707	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)
R708	1-216-809-11	METAL CHIP	100	5%	1/16W (US)
R708	1-216-025-11	RES-CHIP	100	5%	1/10W (EXCEPT US)
R709	1-218-285-11	RES-CHIP	75	5%	1/16W (US)
R709	1-216-022-00	METAL CHIP	75	5%	1/10W (EXCEPT US)
R711	1-216-837-11	METAL CHIP	22K	5%	1/16W (US)
R711	1-216-081-00	METAL CHIP	22K	5%	1/10W (EXCEPT US)
R712	1-216-821-11	METAL CHIP	1K	5%	1/16W (US)
R713	1-216-837-11	METAL CHIP	22K	5%	1/16W (US)
R713	1-216-081-00	METAL CHIP	22K	5%	1/10W (EXCEPT US)
R714	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R714	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R716	1-216-815-11	METAL CHIP	330	5%	1/16W (US)
R716	1-216-037-00	METAL CHIP	330	5%	1/10W (EXCEPT US)
R717	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R717	1-216-073-91	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R718	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R718	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R719	1-216-817-11	METAL CHIP	470	5%	1/16W (US)
R719	1-216-041-00	METAL CHIP	470	5%	1/10W (EXCEPT US)
R720	1-216-817-11	METAL CHIP	470	5%	1/16W (US)
R720	1-216-041-00	METAL CHIP	470	5%	1/10W (EXCEPT US)

Ref. No.	Part No.	Description			Remarks
R721	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R721	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R722	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R722	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R723	1-216-833-11	METAL CHIP	10K	5%	1/16W (US)
R723	1-216-073-00	RES-CHIP	10K	5%	1/10W (EXCEPT US)
R727	1-218-289-11	RES-CHIP	510	5%	1/16W
R728	1-218-289-11	RES-CHIP	510	5%	1/16W
		< VIBRATOR >			
X601	1-579-242-41	VIBRATOR, CRYSTAL (4.332MHz) (AEP, UK)			
**********					
	1-675-728-21	LOAD MOTOR BOARD			
		**********			
		< CAPACITOR >			
C703	1-162-306-11	CERAMIC	0.01uF	30.00%	16V
C704	1-126-964-11	ELECT	10uF	20.00%	50V
C705	1-162-306-11	CERAMIC	0.01uF	30.00%	16V
C712	1-162-306-11	CERAMIC	0.01uF	30.00%	16V
		< CONNECTOR >			
* CN713	1-568-954-11	PIN, CONNECTOR 5P			
		< DIODE >			
D702	8-719-109-85	DIODE MTZJ-T-77-5.1B			
		< IC >			
IC702	8-759-633-65	IC M54641L			
		< RESISTOR >			
R703	1-249-411-11	CARBON	330	5%	1/4W
R704	1-249-401-11	CARBON	47	5%	1/4W F
**********					
	1-675-725-21	OUT SW BOARD			
		**********			
		< CONNECTOR >			
* CN709	1-568-943-11	PIN, CONNECTOR 5P			
CN715	1-506-481-11	PIN, CONNECTOR 2P			
		< SWITCH >			
S701	1-771-218-11	SWITCH, MICRO (MID OUT)			
S702	1-771-218-11	SWITCH, MICRO (LID)			
S708	1-771-218-11	SWITCH, MICRO (OUT)			
**********					

POWER

Ref. No.	Part No.	Description				Remarks
	A-4726-381-A	POWER BOARD, COMPLETE (C700:US)				
	A-4726-832-A	POWER BOARD, COMPLETE (C700:CND)				
	A-4726-912-A	POWER BOARD, COMPLETE (C900:US)				
	A-4726-919-A	POWER BOARD, COMPLETE (C900:CND)				
	A-4727-010-A	POWER BOARD, COMPLETE				(AEP, UK, E, MY, SP, HK, AUS)
	A-4727-058-A	POWER BOARD, COMPLETE (MX)				
		**********				
		< CAPACITOR >				
⚠C901	1-117-703-11	CERAMIC	0.0047uF	99%	250V	
⚠C902	1-115-165-11	FILM	0.1uF	20.00%	275V	
⚠C903	1-162-290-31	CERAMIC	470PF	10%	50V	
⚠C904	1-104-705-11	MYLAR	0.1uF	20.00%	250V	(US)
⚠C904	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(AEP, UK, E, MY, SP, HK, MX, AUS)
⚠C904	1-115-165-11	FILM	0.1uF	20.00%	275V	(CND)
⚠C905	1-113-920-11	CERAMIC	0.0022uF	20.00%	250V	(US)
⚠C905	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(EXCEPT US)
⚠C906	1-113-920-11	CERAMIC	0.0022uF	20.00%	250V	(US)
⚠C906	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(EXCEPT US)
⚠C907	1-164-159-21	CERAMIC	0.1uF		50V	(US, CND, MX)
⚠C907	1-164-159-11	CERAMIC	0.1uF		50V	(EXCEPT US, CND, MX)
⚠C908	1-113-920-11	CERAMIC	0.0022uF	20.00%	250V	(US)
⚠C908	1-104-705-11	MYLAR	0.1uF	20.00%	250V	(AEP, UK, E, MY, SP, HK, MX, AUS)
⚠C908	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(CND)
⚠C909	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(EXCEPT US, CND)
⚠C910	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(EXCEPT US, CND)
⚠C911	1-113-915-11	CERAMIC	0.001uF	20.00%	250V	(EXCEPT US, CND)
⚠C912	1-137-994-11	ELECT	820uF	20%	200V	(US)
⚠C913	1-136-203-11	FILM	10000PF	5.00%	630V	
⚠C914	1-126-967-11	ELECT	47uF	20.00%	50V	
⚠C915	1-162-286-21	CERAMIC	220PF	10.00%	50V	(US, CND, MX)
⚠C915	1-162-286-31	CERAMIC	220PF	10%	50V	(US, CND, MX)
⚠C916	1-117-454-11	FILM	4700PF	5.00%	630V	(US, CND, MX)
⚠C916	1-137-751-21	FILM	2200PF	3%	800V	(EXCEPT US, CND, MX)
C917	1-113-907-51	CERAMIC	0.0022uF	99%	250V	
C918	1-115-339-11	CERAMIC CHIP	0.1uF	10.00%	50V	
C919	1-115-789-11	ELECT	1000uF	20.00%	25V	
C920	1-136-203-11	FILM	10000PF	5.00%	630V	
C921	1-115-819-11	ELECT	2200uF	20.00%	35V (US)	
C921	1-110-617-11	ELECT	2200uF	20.00%	50V	(AEP, UK, E, MY, SP, HK, MX, AUS)
C921	1-110-602-51	ELECT	1800uF	20.00%	25V	(CND)
C922	1-128-560-11	ELECT	22uF	20.00%	100V	(US)
C922	1-126-965-11	ELECT	22uF	20.00%	50V	(EXCEPT US)
C923	1-115-819-11	ELECT	2200uF	20.00%	35V (US)	
C923	1-110-617-11	ELECT	2200uF	20.00%	50V	(AEP, UK, E, MY, SP, HK, MX, AUS)
C923	1-110-602-51	ELECT	1800uF	20.00%	25V	(CND)
C924	1-126-953-11	ELECT	2200uF	20.00%	35V	(US, CND)
C924	1-126-972-11	ELECT	1000uF	20.00%	50V	(EXCEPT US, CND)
C925	1-126-960-11	ELECT	1uF	20.00%	50V	
C926	1-115-339-11	CERAMIC CHIP	0.1uF	10.00%	50V	
C927	1-115-339-11	CERAMIC CHIP	0.1uF	10.00%	50V	
C928	1-126-916-11	ELECT	1000uF	20.00%	6.3V	
C929	1-104-665-11	ELECT	100uF	20.00%	10V	
C930	1-115-339-11	CERAMIC CHIP	0.1uF	10.00%	50V	
C931	1-126-916-11	ELECT	1000uF	20.00%	6.3V	
C932	1-115-339-11	CERAMIC CHIP	0.1uF	10.00%	50V	
C933	1-126-768-11	ELECT	2200uF	20.00%	16V (US)	
C933	1-126-942-61	ELECT	1000uF	20.00%	16V	(CND, MX)
C936	1-163-809-11	CERAMIC CHIP	0.047uF	10%	25V	
		< CONNECTOR >				
CN901	1-564-321-00	PIN, CONNECTOR 2P				
* CN902	1-564-321-21	PIN, CONNECTOR 2P (US, CND, MX)				
CN902	1-564-321-00	PIN, CONNECTOR 2P (EXCEPT US, CND, MX)				
* CN904	1-564-778-11	PLUG, CONNECTOR (2.5MM) 4P				
* CN905	1-568-939-11	PIN, CONNECTOR 12P				
		< DIODE >				
⚠D901	8-719-991-33	DIODE	1SS133T-77 (US, CND, MX)			
⚠D901	8-719-911-19	DIODE	1SS133T-72 (EXCEPT US, CND, MX)			
⚠D902	8-719-022-92	DIODE	RBV-604			
⚠D903	8-719-010-98	DIODE	MTZJ-T-77-22A (US)			
⚠D903	8-719-110-48	DIODE	MTZJ-T-72-18A			(AEP, UK, E, MY, SP, HK, AUS)
⚠D903	8-719-922-03	DIODE	MTZJ-T-77-18C (CND, MX)			
⚠D904	8-719-110-61	DIODE	MTZJ-T-77-24A (US, CND, MX)			
⚠D904	8-719-947-81	DIODE	MTZJ-T-72-24A (US, CND, MX)			
⚠D905	8-719-200-91	DIODE	11EQS10-TA1 (US, CND, MX)			
⚠D905	8-719-200-93	DIODE	11EQS10-TA2 (EXCEPT US, CND, MX)			
⚠D906	8-719-200-91	DIODE	11EQS10-TA1 (US, CND, MX)			
⚠D906	8-719-200-93	DIODE	11EQS10-TA2 (EXCEPT US, CND, MX)			
⚠D907	8-719-200-91	DIODE	11EQS10-TA1 (US, CND, MX)			
⚠D907	8-719-200-93	DIODE	11EQS10-TA2 (EXCEPT US, CND, MX)			
⚠D908	8-719-080-26	DIODE	SARS01V0 (US, CND, MX)			

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remarks
D909	8-719-079-46	DIODE FMB-G16L	
D910	8-719-200-91	DIODE 11EQS10-TA1 (US, CND, MX)	
D910	8-719-200-93	DIODE 11EQS10-TA2 (EXCEPT US, CND, MX)	
D911	8-719-313-14	DIODE FML-22S (US, CND, MX)	
D912	8-719-110-42	DIODE MTZJ-T-77-15C	
D913	8-719-404-50	DIODE MA111-TX	
D914	8-719-210-21	DIODE 11EQS04-TA1B	
D915	8-719-404-50	DIODE MA111-TX	
D916	8-719-210-21	DIODE 11EQS04-TA1B	
D917	8-719-200-82	DIODE 11ES2-NTA1B (US, CND, MX)	
D917	8-719-024-99	DIODE 11ES2-NTA2B (EXCEPT US, CND, MX)	
D918	8-719-404-50	DIODE MA111-TX	
D920	1-216-296-11	SHORT 0 (US, CND, MX)	
D921	1-216-296-11	SHORT 0 (US, CND, MX)	
		< EARTH >	
EB901	1-537-770-11	TERMINAL BOARD, GROUND	
EB902	1-537-770-11	TERMINAL BOARD, GROUND	
		< FUSE >	
⚠F901	1-533-453-11	FUSE, GLASS TUBE (DIA. 5) 5A/125V	(US, CND, MX)
⚠F901	1-533-471-11	FUSE, GLASS TUBE (DIA. 5) T3.15A/250V	(EXSEPT US, CND, MX)
		< FERRITE BEAD >	
FB901	1-412-473-41	INDUCTOR 0uH	
		< FUSE HOLDER >	
FH901	1-533-313-11	HOLDER, FUSE	
FH902	1-533-313-11	HOLDER, FUSE	
		< IC >	
⚠IC901	6-700-162-01	IC STR-F6426S (US, CND, MX)	
⚠IC901	8-749-017-79	IC STR-F6676 (EXCEPT US, CND, MX)	
IC902	6-700-388-01	IC SE-B2	
IC903	6-700-812-01	IC SI-8050JF (US, CND, MX)	
IC903	8-759-474-09	IC SI-8050S-LF1101 (EXCEPT US, CND, MX)	
IC904	8-759-332-29	IC M51945BL	
IC905	8-759-450-47	IC BA05T	
IC906	6-700-813-01	IC SI-8033JF (US, CND, MX)	
IC906	8-759-659-28	IC SI-8033S (EXCEPT US, CND, MX)	
IC907	8-759-390-72	IC TC4S584F(TE85R) (US, CND, MX)	
IC907	8-759-257-96	IC TC7S14FU(TE85R) (EXCEPT US, CND, MX)	
		< COIL >	
L901	1-424-860-11	INDUCTOR 10uH (US, CND, MX)	
L901	1-419-505-11	INDUCTOR 10uH (EXCEPT US, CND, MX)	
L902	1-419-253-11	INDUCTOR 100uH (EXCEPT CND)	
L902	1-419-506-11	INDUCTOR 150uH (CND)	
L903	1-419-253-11	INDUCTOR 100uH (EXCEPT CND)	
L903	1-419-506-11	INDUCTOR 150uH (CND)	
L904	1-414-398-11	INDUCTOR 10uH	
L905	1-414-398-11	INDUCTOR 10uH	
L906	1-414-398-11	INDUCTOR 10uH	
L907	1-414-398-11	INDUCTOR 10uH	
L908	1-414-398-11	INDUCTOR 10uH	
		< LINE FILTER >	
⚠LF901	1-424-930-11	COIL, LINE FILTER	
		< PHOTO COUPLER >	
⚠PC901	8-749-019-04	PHOTO COUPLER TLP421	
⚠PC902	8-749-019-04	PHOTO COUPLER TLP421	
		< TRANSISTOR >	
⚠Q901	8-729-119-76	TRANSISTOR 2SA1175TP-HFE	
⚠Q902	8-729-140-04	TRANSISTOR 2SB1116A-TP-LK	
⚠Q903	8-729-111-29	TRANSISTOR 2SD1616A-TP-LK (C700)	
⚠Q903	8-719-922-03	DIODE MTZJ-T-77-18C (C900)	
Q905	8-729-900-53	TRANSISTOR DTC114EKA-T146	
Q906	8-729-900-53	TRANSISTOR DTC114EKA-T146	
Q907	8-729-030-19	TRANSISTOR 2SB1640(TP) (US, CND, MX)	
Q907	8-729-209-60	TRANSISTOR 2SB1375	(EXCEPT US, CND, MX)
Q908	8-729-900-53	TRANSISTOR DTC114EKA-T146	
Q909	8-729-027-49	TRANSISTOR DTC123EKA-T146	
Q910	8-729-900-53	TRANSISTOR DTC114EKA-T146	
Q911	8-729-900-53	TRANSISTOR DTC114EKA-T146 (US)	
Q915	8-729-900-53	TRANSISTOR DTC114EKA-T146	(US, CND, MX)
Q915	8-729-027-23	TRANSISTOR DTA114EKA-T146	(EXCEPT US, CND, MX)
		< RESISTOR >	
⚠R900	1-219-237-11	SOLID 3.3M 20% 1/2W	(CND)
⚠R900	1-202-725-00	SOLID 3.3M 10% 1/2W	(US)
⚠R900	1-219-237-91	SOLID 3.3M 20% 1/2W	(AEP, UK, E, MY, SP, HK, MX, AUS)
⚠R901	1-249-415-11	CARBON 680 5% 1/4W F	
⚠R902	1-243-979-31	METAL OXIDE 0.1 5% 2W (US)	
⚠R902	1-243-979-11	METAL OXIDE 0.1 5% 2W	(EXCEPT US)
⚠R903	1-243-979-31	METAL OXIDE 0.1 5% 2W (US)	
⚠R904	1-247-881-00	CARBON 120K 5% 1/4W	
⚠R905	1-249-439-11	CARBON 68K 5% 1/4W	
⚠R906	1-249-424-11	CARBON 3.9K 5% 1/4W F	
⚠R907	1-249-425-11	CARBON 4.7K 5% 1/4W F	
⚠R908	1-215-878-00	METAL OXIDE 33K 5% 1W	(US, CND, MX)
⚠R908	1-215-901-00	METAL OXIDE 33K 5% 2W	(EXCEPT US, CND, MX)
⚠R909	1-260-127-11	CARBON 220K 5% 1/2W	(US, CND, MX)
⚠R909	1-247-887-00	CARBON 220K 5% 1/4W	(EXCEPT US, CND, MX)

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

POWER | PW-1089 | RF-240

Ref. No.	Part No.	Description			Remarks
⚠R910	1-215-884-31	METAL OXIDE	47	5%	2W (US)
⚠R910	1-215-884-11	METAL OXIDE	47	5%	2W (EXCEPT US)
⚠R911	1-249-425-11	CARBON	4.7K	5%	1/4W F
⚠R912	1-249-426-11	CARBON	5.6K	5%	1/4W
⚠R913	1-249-399-11	CARBON	33	5%	1/4W F (US, CND, MX)
⚠R913	1-249-385-11	CARBON	2.2	5%	1/6W F (EXCEPT US, CND, MX)
R914	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R915	1-216-826-11	METAL CHIP	2.7K	5%	1/16W
R916	1-249-421-11	CARBON	2.2K	5%	1/4W F (US, CND, MX)
R916	1-249-420-11	CARBON	1.8K	5%	1/4W F (EXCEPT US, CND, MX)
R917	1-249-420-11	CARBON	1.8K	5%	1/4W F (US, CND, MX)
R917	1-249-422-11	CARBON	2.7K	5%	1/4W F (EXCEPT US, CND, MX)
⚠R918	1-215-884-31	METAL OXIDE	47	5%	2W (US)
R919	1-249-429-11	CARBON	10K	5%	1/4W (C700:US, CND, MX)
R919	1-249-433-11	CARBON	22K	5%	1/4W (C900)
R919	1-249-431-11	CARBON	15K	5%	1/4W (AEP, UK, E, MY, SP, HK, AUS)
R920	1-249-433-11	CARBON	22K	5%	1/4W (US, CND, MX)
R920	1-249-421-11	CARBON	2.2K	5%	1/4W F (EXCEPT US, CND, MX)
R921	1-216-853-11	METAL CHIP	470K	5%	1/16W (C700:US, CND, MX)
R921	1-216-857-11	METAL CHIP	1M	5%	1/16W (C900)
R921	1-216-850-11	METAL CHIP	270K	5%	1/16W (AEP, UK, E, MY, SP, HK, AUS)
R922	1-216-843-11	METAL CHIP	68K	5%	1/16W (C700:US, CND, MX)
R922	1-216-841-11	METAL CHIP	47K	5%	1/16W (C900)
R922	1-216-845-11	METAL CHIP	100K	5%	1/16W (AEP, UK, E, MY, SP, HK, AUS)
R923	1-216-833-11	METAL CHIP	10K	5%	1/16W
R924	1-216-818-11	METAL CHIP	560	5%	1/16W (US, CND, MX)
R925	1-216-811-11	METAL CHIP	150	5%	1/16W (US, CND, MX)
R925	1-216-823-11	METAL CHIP	1.5K	5%	1/16W (EXCEPT US, CND, MX)
R926	1-216-825-11	METAL CHIP	2.2K	5%	1/16W
R927	1-215-865-11	METAL OXIDE	220	5%	1W (US)
R927	1-249-417-11	CARBON	1K	5%	1/4W F (EXCEPT US)
R928	1-216-841-11	METAL CHIP	47K	5%	1/16W (US)
R928	1-216-837-11	METAL CHIP	22K	5%	1/16W (EXCEPT US)
R929	1-216-809-11	METAL CHIP	100	5%	1/16W
R932	1-216-848-11	METAL CHIP	180K	5%	1/16W (US)
R932	1-216-847-11	METAL CHIP	150K	5%	1/16W (EXCEPT US)
R933	1-216-841-11	METAL CHIP	47K	5%	1/16W (US)
R934	1-216-837-11	METAL CHIP	22K	5%	1/16W (US, CND, MX)
R934	1-216-836-11	METAL CHIP	18K	5%	1/16W (EXCEPT US, CND, MX)
		< TRANSFORMER >			
⚠T901	1-437-414-11	TRANSFORMER, POWER			
		< THERMISTOR >			
⚠TH901	1-803-916-11	THERMISTOR, NTC			
**********					
	1-682-002-11	PW-1089 BOARD			
		**********			
		< DIODE >			
D812	8-719-071-44	DIODE SELS5223C-TP15 (POWER)			
		< RESISTOR >			
R804	1-216-827-11	METAL CHIP	3.3K	5%	1/16W
**********					
	A-4726-883-A	RF-240 BOARD, COMPLETE			
		**********			
		< CAPACITOR >			
C001	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C002	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C005	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C006	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C007	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C008	1-162-966-11	CERAMIC CHIP	0.0022uF	10%	50V
C009	1-124-779-00	ELECT CHIP	10uF	20%	16V
C015	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C016	1-162-968-11	CERAMIC CHIP	0.0047uF	10%	50V
C017	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C018	1-115-416-11	CERAMIC CHIP	0.001uF	5.00%	25V
C019	1-164-739-11	CERAMIC CHIP	560PF	5.00%	50V
C021	1-124-779-00	ELECT CHIP	10uF	20%	16V
C022	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C023	1-126-206-11	ELECT CHIP	100uF	20%	6.3V
C024	1-115-416-11	CERAMIC CHIP	0.001uF	5.00%	25V
C025	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C026	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C027	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C028	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C031	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C032	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C033	1-162-964-11	CERAMIC CHIP	0.001uF	10%	50V
C034	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C035	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

RF-240 **SENSOR** **SENSOR 2** **SW-1089**

Ref. No.	Part No.	Description			Remarks
C036	1-165-176-11	CERAMIC CHIP	0.047uF	10.00%	16V
C038	1-165-176-11	CERAMIC CHIP	0.047uF	10.00%	16V
C039	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C040	1-164-217-11	CERAMIC CHIP	150PF	5.00%	50V
C043	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C044	1-124-778-00	ELECT CHIP	22uF	20%	6.3V
C046	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
C047	1-107-826-11	CERAMIC CHIP	0.1uF	10.00%	16V
C048	1-162-970-11	CERAMIC CHIP	0.01uF	10%	25V
		< CONNECTOR >			
CN001	1-766-835-11	CONNECTOR, FFC/FPC (ZIF) 26P			
CN002	1-784-875-21	CONNECTOR,FFC(LIF(NON-ZIF))25P			
CN003	1-784-861-11	CONNECTOR, FFC(LIF(NON-ZIF))9P			
CN004	1-784-861-11	CONNECTOR, FFC(LIF(NON-ZIF))9P			
		< DIODE >			
D001	8-719-988-61	DIODE 1SS355TE-17			
D004	8-719-988-61	DIODE 1SS355TE-17			
		< IC >			
IC001	8-759-828-02	IC SP3728AC			
		< COIL >			
L001	1-412-031-11	INDUCTOR CHIP	47uH		
L002	1-412-031-11	INDUCTOR CHIP	47uH		
		< TRANSISTOR >			
Q001	8-729-903-46	TRANSISTOR	2SB1132-T100-QR		
Q002	8-729-903-46	TRANSISTOR	2SB1132-T100-QR		
		< RESISTOR >			
R002	1-216-809-11	METAL CHIP	100	5%	1/16W
R003	1-216-809-11	METAL CHIP	100	5%	1/16W
R005	1-216-845-11	METAL CHIP	100K	5%	1/16W
R006	1-216-838-11	METAL CHIP	27K	5%	1/16W
R007	1-216-803-11	METAL CHIP	33	5%	1/16W
R008	1-216-803-11	METAL CHIP	33	5%	1/16W
R009	1-216-821-11	METAL CHIP	1K	5%	1/16W
R010	1-216-841-11	METAL CHIP	47K	5%	1/16W
R011	1-216-809-11	METAL CHIP	100	5%	1/16W
R020	1-216-803-11	METAL CHIP	33	5%	1/16W
R023	1-216-803-11	METAL CHIP	33	5%	1/16W
R025	1-216-841-11	METAL CHIP	47K	5%	1/16W
R029	1-216-809-11	METAL CHIP	100	5%	1/16W
R037	1-216-834-11	METAL CHIP	12K	5%	1/16W
R038	1-216-861-11	METAL CHIP	2.2M	5%	1/16W
R045	1-216-809-11	METAL CHIP	100	5%	1/16W

****

Ref. No.	Part No.	Description			Remarks
	1-675-726-21	SENSOR BOARD			
		**********			
		< CONNECTOR >			
CN708	1-506-481-11	PIN, CONNECTOR 2P			
		< DIODE >			
D704	8-719-055-84	DIODE GL528VS1 (DISC IN DETECT SENSOR)			
		< RESISTOR >			
R711	1-249-415-11	CARBON	680	5%	1/4W F

****

	1-675-727-21	SENSOR 2 BOARD			
		**********			
	4-964-461-02	HOLDER (SENSOR)			
		< TRANSISTOR >			
Q703	8-729-921-53	PHOTO TRAN	ISTOR PT483F1		

****

	1-682-000-11	SW-1089 BOARD			
		**********			
		< CONNECTOR >			
CN810	1-506-481-11	PIN, CONNECTOR 2P			
		< RESISTOR >			
R800	1-216-829-11	METAL CHIP	4.7K	5%	1/16W
R801	1-216-832-11	METAL CHIP	8.2K	5%	1/16W
R802	1-216-835-11	METAL CHIP	15K	5%	1/16W
R803	1-216-841-11	METAL CHIP	47K	5%	1/16W
		< SWITCH >			
S801	1-762-875-21	SWITCH, KEYBOARD (■)			
S802	1-762-875-21	SWITCH, KEYBOARD (❚❚)			
S803	1-762-875-21	SWITCH, KEYBOARD (▷)			
S804	1-762-875-21	SWITCH, KEYBOARD (PRESET +/NEXT ▶▶❙)			
S805	1-762-875-21	SWITCH, KEYBOARD (PRESET -/❙◀◀ PREV)			

****

Ref. No.	Part No.	Description	Remarks
		MISCELLANEOUS	
		**********	
⚠5	1-775-789-91	CORD, POWER (MX)	
⚠5	1-783-532-11	CORD, POWER (US, CND)	
⚠5	1-690-608-11	CORD, POWER (AUS)	
⚠5	1-696-169-21	CORD, POWER (AEP, UK, E, MY, SP, HK)	
52	1-823-082-11	CABLE, FLEXIBLE FLAT (13 CORE)	
54	1-823-124-11	CABLE, FLEXIBLE FLAT (29 CORE)	
55	1-823-355-11	CABLE, FLEXIBLE FLAT (13 CORE)	
62	1-823-080-11	CABLE, FLEXIBLE FLAT (25 CORE)	
63	1-823-083-11	CABLE, FLEXIBLE FLAT (9 CORE)	
64	1-823-078-11	CABLE, FLEXIBLE FLAT (17 CORE)	
65	1-823-125-11	CABLE, FLEXIBLE FLAT (12 CORE)	
66	1-823-084-11	CABLE, FLEXIBLE FLAT (17 CORE)	
108	1-786-210-11	SWITCH, POWER	
114	1-823-081-11	CABLE, FLEXIBLE FLAT (17 CORE)	
454	1-823-085-11	CABLE, FLEXIBLE FLAT (9 CORE)	
455	1-823-072-11	CABLE, FLEXIBLE FLAT 26P	
⚠458	8-820-144-06	OPTICAL PICK-UP KHM-240AAA	
488	1-675-729-21	CLAMP MOTOR BOARD	
M701	X-4950-341-1	MOTOR (CLAMP) ASSY	
M702	X-4950-342-1	MOTOR (LOADING) ASSY	
S707	1-418-045-01	ENCODER, ROTARY (DISC TRAY ADDRESS DETECT)	

Ref. No.	Part No.	Description	Remarks
		**********	
		HARDWARE LIST	
		**********	
#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	
#2	7-685-548-14	SCREW +BTP 3X12 TYPE2 N-S	
#3	7-682-547-09	SCREW +B 3X6	
#4	3-229-336-01	SCREW, +BVWH TAPPING	
#5	7-685-533-19	SCREW +BTP 2.6X6 TYPE2 N-S	

The components identified by mark ⚠ or dotted line with mark ⚠ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

MEMO

REVISION HISTORY

Clicking the version allows you to jump to the revised page.
Also, clicking the version at the upper right on the revised page allows you to jump to the next revised page.

Ver.	Date	Description of Revision
1.0	2001.09	New
1.1	2002.03	Correction of Part No. for Ref. No. D909 (SFD-02002)
1.2	2003.05	Addition of “CHECKING OF OPERATIONS WITH REMOTE COMMANDERS OF DIFFERENT MODELS” (SFM-03001) Addition of “TEST DISC LIST”and servo adjustment note to the TEST MODE (SFM-03008)
1.3	2003.07	Correction of “TEST DISC LIST” (SPM-03070)
1.4	2004.08	Addition of note of replacing the DVD board (SPM-04038)
1.5	2005.10	Correction of Parts No. for Ref. No. 111 and 112 (SPM-05075)